



COMMERCIAL
RESIDENTIAL
LIGHTING

*New Standard
in Lighting!*

PRODUCT CATALOG
2025/1



SINCE 1999

ASD LIGHTING CORP



ASD Lighting Corp has become one of the leading LED lighting brands in the United States for commercial and residential applications.

QUALITY

For the production of ASD Luminaires we carefully choose the highest quality components to ensure efficiency and longevity.



LOGISTICS

We are constantly improving our warehouse system so that delivery and storage of ASD products is not only profitable but fast and convenient.



COMMERCIAL LIGHTING

HIGH BAYS

- 10

LED LINEAR HIGH BAY WITH Q-BASE STANDARD series
ASD-WHB5B


- 12

LED LINEAR HIGH BAY WITH Q-BASE PRO series
ASD-WHB5B-PRO


- 14

LED UFO HIGH BAY WITH Q-BASE STANDARD series
ASD-UHB2A


- 16

LED UFO HIGH BAY WITH Q-BASE PRO series
ASD-UHB2A-PRO



NSF LIGHTING

- 18

NSF LED UFO HIGH BAY WITH Q-BASE
ASD-UFS-PRO



LINEAR LIGHTS

- 19

LED WRAP FIXTURE
ASD-WRL, ASD-WRL2


- 20

LED SEAMLESS VAPOR PROOF FIXTURE
ASD-LVP2SM


- 22

LED STRIPLIGHT FIXTURE
ASD-LSF5


- 24

LED STRIPLIGHT FIXTURE WITH Q-BASE
ASD-LSF8



LED TROFFERS

- 26

LED TROFFER LIGHTS
ASD-LTR


- 27

LED TROFFER KIT
ASD-LTRK



LED PANELS

- 28

LED BACK-LIT FLAT PANEL
ASD-BLP


- 30

LED BACK-LIT FLAT PANEL PRO series
10 YEAR WARRANTY
ASD-BLP-PRO


- 31

LED BACK-LIT FLAT PANEL HIGH EFFICIENCY
ASD-BLP


- 32

SMART LED BACK-LIT FLAT PANEL
ASD-BLP-SM



DOWNLIGHTS

- 33

LED TRIMLESS DOWNLIGHT COMBO GIMBAL
ASD-TCS


- 34

LED TRIMLESS DOWNLIGHT
ASD-CD-T


- 36

LED TRIMLESS DOWNLIGHT GIMBAL
ASD-CD-TG


- 38

LED DOWNLIGHT 1 & 2 INCH
ASD-CD-P


- 39

LED DOWNLIGHT 2 INCH WITH WALL WASH TRIM
ASD-CD-PWR


- 40

LED ROUND COMMERCIAL DOWNLIGHT
ASD-CDL7


- 42

LED COMMERCIAL DOWNLIGHT
ASD-CDL7R, ASD-CDL7S


- 44

LED ROUND RECESSED MINI PANEL 100-277V WITH BAFFLE TRIM
ASD-JBRB-MV


- 45

LED ROUND RECESSED MINI PANEL FIRE RATED
ASD-JFR



CANOPIES

- 46

LED LOW-PROFILE CANOPY WITH Q-BASE
ASD-CAN07A


- 47

LED EDGE-LIT CANOPY SQUARE WITH Q-BASE
ASD-CAN09S



AREA LIGHTS

- 48

LED AREA LIGHT STANDARD series
ASD-LSB5


- 50

LED AREA LIGHT WITH Q-BASE PRO series
ASD-LSB5B-PRO


- 52

LED ROUND AREA LIGHT WITH Q-BASE
ASD-LSB5R-PRO



SPORT LIGHTS

- 56

LED SPORT LIGHT
ASD-SPFL7


- 57

LED SPORT LIGHT WITH DMX & RGBW
ASD-SPFL7-DMX


- 58

LED SPORT LIGHT
ASD-SPFL8



WALLPACKS

- 59

LED SECURITY WALLPACK WITH PHOTOCELL
ASD-SWP


- 60

LED TRADITIONAL WALLPACK
ASD-WLP01


- 61

LED ADJUSTABLE CUTOFF WALLPACK
ASD-WLP02A


- 62

LED FULL CUTOFF WALLPACK
ASD-WLP03


- 63

LED SLIM WALLPACK
ASD-WLS


- 64

LED WALLPACK ROUND
ASD-WLR



SECURITY LIGHTS

- 65

LED VAPOR TIGHT JELLY JAR LIGHT
ASD-VTJ


- 66

LED SECURITY FLOODLIGHT RECTANGULAR HEADS
ASD-SFL2


- 67

LED SECURITY FLOODLIGHT WITH MOTION SENSOR
ASD-SFL


- 67

LED SECURITY FLOODLIGHT WITH CAMERA
ASD-SFL-SC



SENSORS

- 70

NLS Q-BASE MOTION SENSOR
ASD-M2MW-NLS, ASD-M22IR-NLS


- 71

NLS MOTION SENSOR WITH 3-PIN BASE
ASD-09IR-NLS, ASD-09MW-NLS


- 72

Q-BASE MOTION SENSOR
ASD-M2MW, ASD-08MW, ASD-M22IR


- 73

MOTION SENSOR WITH 3-PIN BASE
ASD-09IR, ASD-09IR50, ASD-09MW



BATTERIES

- 76

NLS EMERGENCY BATTERY BACK-UP KIT
ASD-EMA15-NLS, ASD-EMB40-NLS


- 77

EMERGENCY BATTERY BACK-UP KIT
BLD-RM, ASD-EMB, BLD-GM60R-HV


- 78

EMERGENCY BATTERY BACK-UP KIT
ASD-EMK


- 79

EMERGENCY BATTERY BACK-UP KIT
BLD-HM, ASD-EMA15



RESIDENTIAL LIGHTING

FLUSHMOUNT LIGHTS

- 82

LED FLUSHMOUNT LOFT
ASD-LOFT-FM


- 83

LED FLUSHMOUNT LOFT WITH RGBW
ASD-LOFT-FM-RGBW


- 84

LED DOUBLE RING FLUSHMOUNT
ASD-LFMDR


- 85

LED DOUBLE RING FLUSHMOUNT WITH RGBW
ASD-LFMDR-RGBW


- 86

LED OVAL DOUBLE RING FLUSHMOUNT
ASD-LFMOV


- 87

LED OVAL SURFACE MINI PANEL
ASD-MPO


- 88

LED SURFACE MINI PANEL
ASD-MP


- 90

LED DISK LIGHT
ASD-LDS



CANLESS RECESSED LIGHTS

- 92

LED ROUND RECESSED MINI PANEL
ASD-JBR


- 92

LED SQUARE RECESSED MINI PANEL
ASD-JBS


- 93

LED ROUND RECESSED MINI PANEL WITH RGBW
ASD-JBR-RGBW


- 94

NEW CONSTRUCTION MOUNTING PLATE
ASD-MPL



RETROFIT DOWNLIGHTS

- 95

LED ROUND DOWNLIGHT RETROFIT KIT
ASD-LRKR


- 95

LED SQUARE DOWNLIGHT RETROFIT KIT
ASD-LRKS


- 96

LED DOWNLIGHT RETROFIT KIT GIMBAL
ASD-LRK-GBR, ASD-LRK-GB


- 97

LED FLAT DOWNLIGHT RETROFIT KIT
ASD-LRKR-F



LED VANITY LIGHTS

- 98

LED VANITY LINEAR LOFT
ASD-LOFT-VF


- 99

LED VANITY LINEAR
ASD-LVF21


- 100

LED VANITY LINEAR
ASD-LVF22


- 101

LED VANITY LINEAR
ASD-LVF23


- 102

LED VANITY LIGHT
ASD-LVF24M



VANITY AND PENDANT IGHTS

- 103

VANITY LIGHT & MINI-PENDANT
ASD-VF27, ASD-MP27


- 104

VANITY LIGHT & MINI-PENDANT
ASD-VF44, ASD-MP44


- 105

VANITY LIGHT & MINI-PENDANT
ASD-VF45, ASD-MP45



INDOOR WALL SCONCES

- 106

LED WALL SCONCE LOFT
ASD-LOFT-WS


- 107

LED WALL SCONCE
ASD-LWS-11


- 108

LED WALL SCONCE
ASD-LWS-12



UNDER CABINET LIGHTS

- 109

LED UNDER CABINET BULLNOSE
ASD-UBN


- 110

LED UNDER CABINET LINEAR
ASD-UCL


- 111

LED UNDER CABINET SWIVEL
ASD-UCS



OUTDOOR LED LIGHTS

- 112

LED STEP LIGHT HORIZONTAL
ASD-LSTL


- 113

LED STEP LIGHT HORIZONTAL WITH RGBW
ASD-STLA-RGBW


- 114

LED HARDSCAPE LIGHT SWIVEL
ASD-HSLS


- 115

LED HARDSCAPE LIGHT SWIVEL WITH RGBW
ASD-HSLS-RGBW



OUTDOOR LED WALL LIGHTS

- 116

LED OUTDOOR WALL SCONCE
ASD-OLWS-21


- 117

LED OUTDOOR WALL SCONCE WITH GRID
ASD-OLWS-21GR


- 118

LED OUTDOOR WALL SCONCE WITH RGBW
ASD-OLWS-21-RGBW


- 119

LED OUTDOOR WALL SCONCE
ASD-OLWS-22


- 120

LED OUTDOOR WALL SCONCE
ASD-OLWS-23


- 121

LED OUTDOOR WALL SCONCE WITH RGBW
ASD-OLWS-23-RGBW


- 122

LED OUTDOOR WALL SCONCE
ASD-LWS26S


- 123

LED OUTDOOR WALL SCONCE WITH RGBW
ASD-LWS26-RGBW


- 124

LED OUTDOOR WALL SCONCE
ASD-LWS28S


- 125

LED OUTDOOR WALL SCONCE WITH BACKLIGHT
ASD-LWS27B



OUTDOOR LED WALL LIGHTS

- 126

LED OUTDOOR WALL SCONCE WIDE ACRYLIC
ASD-LWS27A


- 127

LED OUTDOOR WALL SCONCE WIDE ACRYLIC WITH RGBW
ASD-LWS27A-RGBW


- 128

LED OUTDOOR WALL SCONCE NARROW DESIGN
ASD-LWS27N


- 129

LED OUTDOOR WALL SCONCE NARROW DESIGN WITH RGBW
ASD-LWS27N-RGBW


- 130

LED OUTDOOR WALL SCONCE WITH CENTER LIGHT
ASD-LWS27C


- 131

LED OUTDOOR WALL SCONCE WITH CENTER LIGHT & RGBW
ASD-LWS27C-RGBW


- 132

LED OUTDOOR WALL CYLINDER
ASD-LCL


- 133

LED OUTDOOR WALL CYLINDER WITH RGBW
ASD-LCLR2-RGBW


- 133

LED OUTDOOR WALL CYLINDER WITH DECORATIVE RINGS
ASD-LCL-B



OUTDOOR BULB LIGHTS

- 134

BULB OUTDOOR WALL CYLINDER
ASD-OCL-A


- 134

BULB OUTDOOR WALL CYLINDER WITH DECORATIVE RINGS
ASD-OCL-B


- 135

BULB OUTDOOR BOLLARD WITH DECORATIVE RING
ASD-BLC





COMMERCIAL LIGHTING



LED LINEAR HIGH BAY WITH Q-BASE STANDARD series

ASD-WHB5B



 **POWER ADJUSTABLE**

3PA POWER ADJUSTABLE

 EASILY ADJUSTABLE VIA DIP SWITCH



Q-BASE



DIE-CAST ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION



POWER ADJUSTABLE



IK10
IMPACT RESISTANT



PRODUCT SIZE

14-35 inch



POWER ADJUSTABLE

100W-500W



COLOR TEMPERATURE

5000K



BUILT-IN Q-BASE




INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



BATTERY BACK-UP KIT



MORE THAN 4700lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



UP TO 30W
BATTERY BACK-UP POWER




HOOKS INCLUDED

SUSPENDED MOUNT KIT



PENDANT MOUNT BRACKET

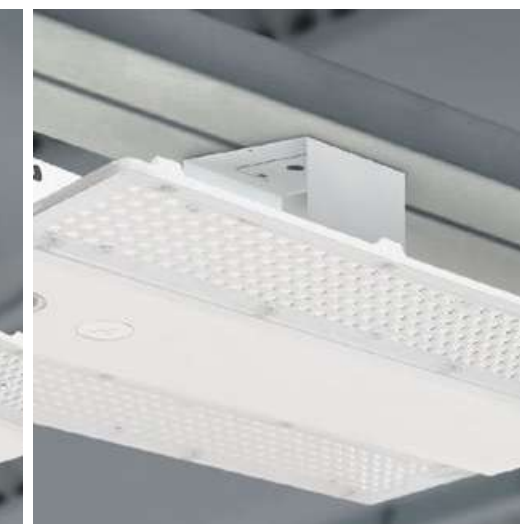

SURFACE MOUNT BRACKET

LED LINEAR HIGH BAY WITH Q-BASE PRO series

ASD-WHB5B-PRO

170
lm/W
SERIES
PRO



170lm/W
EXTREME EFFICIENCY



Q-BASE



COLOR AND POWER
SELECTABLE



IK10
IMPACT RESISTANT



**PRODUCT
SIZE**
14-35 inch



**POWER
ADJUSTABLE**
100W-500W



**COLOR
SELECTABLE**
3500K-5000K



120-277V
voltage



6kV
Surge
protection



277-480V
voltage



**BUILT-IN
Q-BASE**



INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



**BATTERY
BACK-UP**



MORE THAN 4700LM
IN EMERGENCY MODE FOR 90MIN



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



**COLOR AND POWER
SELECTABLE**



3CCT COLOR SELECTABLE



3PA POWER ADJUSTABLE



BUILT-IN BATTERY BACK-UP 40W



BATTERY BACK-UP KIT UP TO 30W



HOOKS INCLUDED

SUSPENDED MOUNT KIT



PENDANT MOUNT BRACKET



SURFACE MOUNT BRACKET

LED UFO HIGH BAY WITH Q-BASE STANDARD series

ASD-UHB2A

150
lm/W
STANDARD
SERIES

 **POWER
ADJUSTABLE**

3PA POWER ADJUSTABLE

 EASILY ADJUSTABLE
VIA DIP SWITCH



Q-BASE



DIE-CAST ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION




-40°F TO 140°F FOR A WIDE
VARIETY OF APPLICATIONS



IP69K RATED, ALLOWS
HIGH PRESSURE WASHING

white

black



**POWER
ADJUSTABLE**

150W-300W



**COLOR
TEMPERATURE**

5000K



**BUILT-IN
Q-BASE**



INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



**BATTERY
BACK-UP KIT**



MORE THAN 6000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



UP TO 60W
BATTERY BACK-UP POWER



ASD-EMB40-NLS 40W




BLD-RM60R 60W



SCREW-BOLT HOOK
AND SPRING HOOK



PENDANT MOUNT
BRACKET

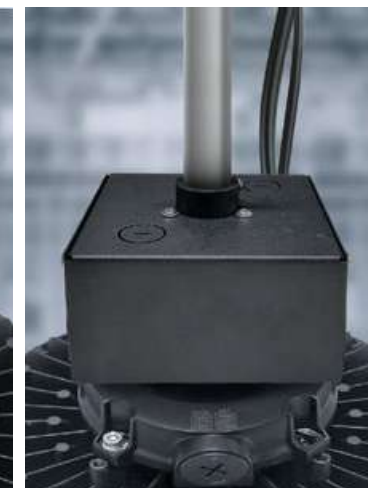

PENDANT MOUNT
BRACKET WITH J-BOX



SURFACE MOUNT
BRACKET

LED UFO HIGH BAY WITH Q-BASE PRO series

ASD-UHB2A-PRO

170
lm/W
SERIES
PRO



170lm/W
EXTREME EFFICIENCY



Q-BASE



COLOR AND POWER
SELECTABLE




IP69K RATED,
ALLOWS HIGH PRESSURE WASHING



**POWER
ADJUSTABLE**
150W-500W



**COLOR
SELECTABLE**
3000K-5000K



**BUILT-IN
Q-BASE**



INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



**BATTERY
BACK-UP KIT**



MORE THAN 6800lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



UP TO 60W
BATTERY BACK-UP POWER



**COLOR AND POWER
SELECTABLE**



COLOR SELECTABLE



POWER ADJUSTABLE




ASD-EMB40-NLS 120-277V



BLD-RM60R 120-277V



BLD-GM60R-HV 277-480V

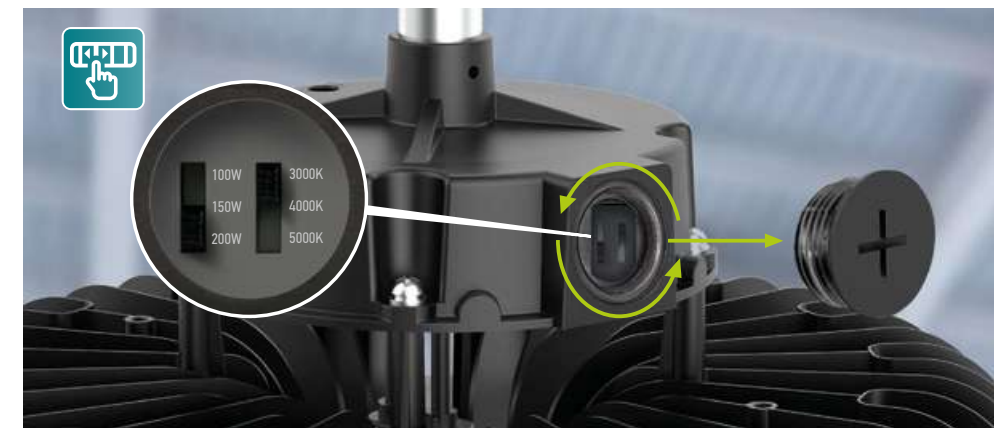

SCREW-BOLT HOOK
AND SPRING HOOK



PENDANT MOUNT
BRACKET



PENDANT MOUNT
BRACKET WITH J-BOX



SURFACE MOUNT
BRACKET

NSF LED UFO HIGH BAY WITH Q-BASE

ASD-UFS-PRO

160
lm/W
EFFICIENCY

 **COLOR AND POWER SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE

 **BUILT-IN Q-BASE**

 INFRARED, MICROWAVE SENSORS WITH REMOTE CONTROL

 INFRARED, MICROWAVE NLS SENSORS WITH ASD NLS APP

 CORROSION-RESISTANT ALUMINUM HOUSING WITH SUS316 STAINLESS STEEL SCREWS

 FOOD GRADE FIXTURE. NSF CERTIFIED

 **COLOR AND POWER SELECTABLE**

 IP69K RATED, ALLOWS HIGH PRESSURE WASHING

 **POWER ADJUSTABLE**
200W, 300W

 **COLOR SELECTABLE**
3000K-5000K

 120-277V voltage
 Surge protection
 200-480V voltage

LED WRAP FIXTURE

 **BUILT-IN BATTERY BACK-UP**

 MORE THAN 1200lm IN EMERGENCY MODE FOR 90min

 AUTOMATIC SELF-TESTING

UP TO 150
lm/W
EFFICIENCY

 **COLOR AND POWER SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE

ASD-WRL

ASD-WRL2

 DURABLE COMMERCIAL GRADE HOUSING RESISTANT TO RUST AND IMPACT

 ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION

 **COLOR AND POWER SELECTABLE**

 0-10V DIMMABLE

 **PRODUCT SIZES**
4ft

 **POWER ADJUSTABLE**
45W, 48W

 **COLOR SELECTABLE**
3500K-5000K

 120-277V voltage

LINEAR LIGHTS

 139
INFO PAGE

LED SEAMLESS VAPOR PROOF FIXTURE

ASD-LVP2SM

 **COLOR AND POWER SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



**IMPACT RESISTANT
POLYCARBONATE BODY**



SEAMLESS DESIGN



**COLOR AND POWER
SELECTABLE**



**STAINLESS CLIPS FOR EASY
INSTALLATION ARE INCLUDED**



**PRODUCT
SIZE**

2ft, 4ft, 8ft



**POWER
ADJUSTABLE**

28W, 56W, 120W



**COLOR
SELECTABLE**

3500K-5000K



**BUILT-IN
MOTION SENSOR**

ASD-LVP2SM-MS



**QUICK ADJUSTMENTS
BY REMOTE CONTROL**



**INSTALLATION HEIGHT
UP TO 13FT**



REMOTE CONTROL
Sold separately



**BUILT-IN
BATTERY BACK-UP**

ASD-LVP2SM-EM



**MORE THAN 2300lm
IN EMERGENCY MODE FOR 90min**



**AUTOMATIC
SELF-TESTING**



**OVERCHARGE
AND OVER-DISCHARGE PROTECTION**



DAISY CHAIN



**EASY TO CONNECT
MULTIPLE FIXTURES**



BUILT-IN JUNCTION BOX



SUSPENDED MOUNTING



SURFACE MOUNTING

LED STRIPLIGHT FIXTURE

ASD-LSF5

140
lm/W
EFFICIENCY

 **COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



**COLOR AND POWER
SELECTABLE**



ANTI-GLARE PMMA LENS
WITH EVEN LIGHT DISTRIBUTION



LINKABLE DESIGN



**PRODUCT
SIZE**
2ft, 4ft, 8ft



**POWER
ADJUSTABLE**
28W, 44W, 90W



**COLOR
SELECTABLE**
3500K-5000K



120-277V
voltage



**BUILT-IN
MOTION SENSOR**
ASD-LSF5-MS



STAIRWELL AND PASSAGEWAY
LUMINAIRES CLASSIFICATION



ADJUSTABLE SENSOR



BI-LEVEL MICROWAVE
MOTION SENSOR



**BUILT-IN
BATTERY BACK-UP**
ASD-LSF5-EM



MORE THAN 2000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



**BUILT-IN MOTION SENSOR
& BATTERY BACK-UP**
ASD-LSF5-EM-MS



STAIRWELL AND PASSAGEWAY
LUMINAIRES CLASSIFICATION



BI-LEVEL MICROWAVE
MOTION SENSOR



MORE THAN 2000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



INCLUDED

SUSPENDED MOUNT V-HOOK



SURFACE MOUNTING



CONNECTION BRACKET



WIRE GUARD

LED STRIPLIGHT FIXTURE WITH Q-BASE

ASD-LSF8

150
lm/W
EFFICIENCY

 **COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



Q-BASE



LINKABLE DESIGN

white



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



COLOR AND POWER
SELECTABLE

black



**PRODUCT
SIZE**

2ft, 4ft, 8ft




**POWER
ADJUSTABLE**

25W, 40W, 80W



**COLOR
SELECTABLE**

3500K-5000K



120-277V
voltage



6kV
Surge
protection



200-480V
voltage



**BUILT-IN
Q-BASE**
ASD-LSF8-QB



STAIRWELL AND PASSAGEWAY
LUMINAIRES CLASSIFICATION



INFRARED SENSOR
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



**BUILT-IN
BATTERY BACK-UP**
ASD-LSF8-EM



MORE THAN 2500lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



**BUILT-IN Q-BASE
& BATTERY BACK-UP**
ASD-LSF8-QB-EM



STAIRWELL AND PASSAGEWAY
LUMINAIRES CLASSIFICATION



INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



MORE THAN 2500lm
IN EMERGENCY MODE FOR 90min



SUSPENDED MOUNTING



SURFACE MOUNTING



CONNECTION BRACKET

LED TROFFER LIGHTS

ASD-LTR

 **BUILT-IN BATTERY BACK-UP**

 MORE THAN 1400lm
IN EMERGENCY MODE FOR 90min

 AUTOMATIC
SELF-TESTING

 **COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



DURABLE IRON COMMERCIAL
GRADE HOUSING



COLOR AND POWER
SELECTABLE



ANTI-GLARE PC LENS
WITH EVEN LIGHT DISTRIBUTION



QUICK AND EASY
INSTALLATION



**PRODUCT
SIZE**

2x2, 2x4



**POWER
ADJUSTABLE**

30W, 45W



**COLOR
SELECTABLE**

3500K-5000K



120-277V
voltage

LED TROFFER KIT

ASD-LTRK

 **COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



DURABLE IRON COMMERCIAL
GRADE HOUSING



COLOR AND POWER
SELECTABLE



ANTI-GLARE PC LENS
WITH EVEN LIGHT DISTRIBUTION



QUICK AND EASY
INSTALLATION



**PRODUCT
SIZE**

2x2, 2x4



**POWER
ADJUSTABLE**

30W, 45W



**COLOR
SELECTABLE**

3500K-5000K



120-277V
voltage

LED BACK-LIT FLAT PANEL

ASD-BLP

125
lm/W
EFFICIENCY

 **COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



Q-BASE
MAGNETIC TYPE



ANTI-GLARE PC LENS
WITH EVEN LIGHT DISTRIBUTION



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



COLOR AND POWER
SELECTABLE



**PRODUCT
SIZE**
1x4, 2x2, 2x4



**POWER
ADJUSTABLE**
30W-67W



**COLOR
SELECTABLE**
3500K-5000K



**BUILT-IN
MOTION SENSOR**
ASD-BLP-MS



MICROWAVE SENSOR
WITH REMOTE CONTROL



MICROWAVE NLS SENSOR
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



**BUILT-IN Q-BASE
& BATTERY BACK-UP**
ASD-BLP-QB-EM



MICROWAVE SENSOR
WITH REMOTE CONTROL



MICROWAVE NLS SENSOR
WITH ASD NLS APP



MORE THAN 1200lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



RECESSED MOUNTING



SUSPENDED MOUNT KIT



SURFACE MOUNT KIT

LED BACK-LIT FLAT PANEL PRO series

10 YEAR WARRANTY

ASD-BLP-PRO

125
lm/W
EFFICIENCY

**COLOR AND POWER
SELECTABLE**

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



10 YEAR WARRANTY



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



COLOR AND POWER
SELECTABLE



MOUNTING OPTIONS: RECESSED,
SUSPENDED, AND SURFACE



120-277V
voltage



**PRODUCT
SIZE**
2x4



**POWER
ADJUSTABLE**
40W



**COLOR
SELECTABLE**
3500K-5000K



LED BACK-LIT FLAT PANEL

HIGH EFFICIENCY

ASD-BLP

10,000
LUMENS

**COLOR AND POWER
SELECTABLE**

5CCT COLOR SELECTABLE

4PA POWER ADJUSTABLE



150lm/W
EXTREME EFFICIENCY



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



ANTI-GLARE PC LENS
WITH EVEN LIGHT DISTRIBUTION



COLOR AND POWER
SELECTABLE



120-277V
voltage



**PRODUCT
SIZE**
2x4



**POWER
ADJUSTABLE**
67W



**COLOR
SELECTABLE**
3000K-6500K



SMART LED BACK-LIT FLAT PANEL

ASD-BLP-SM


RGBW


 RGBW DESIGN
WITH 16.7 MILLION COLORS


 CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



DURABLE COMMERCIAL GRADE HOUSING
RESISTANT TO RUST AND IMPACT



SMART CONTROL WITH APP



SMOOTHLY DIMMABLE
AND CCT TUNABLE



FIXTURE GROUPING
AND SCHEDULE PROGRAMMING



**PRODUCT
SIZE**

2x2, 2x4



**AVAILABLE
POWER**

35W, 40W




**COLOR
SELECTABLE**

3500K-5000K-RGBW



LED TRIMLESS DOWNLIGHT COMBO GIMBAL

ASD-TCS

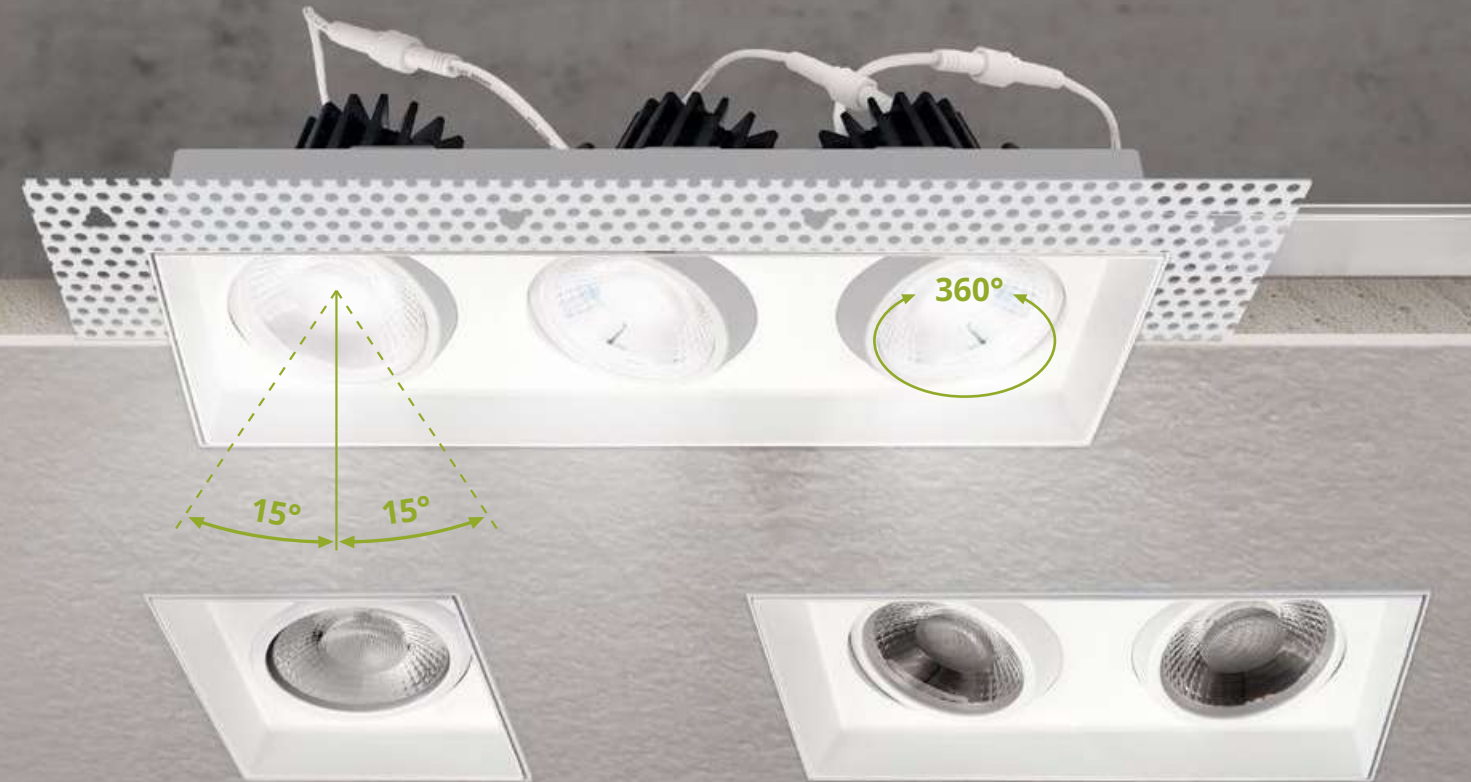

MULTI-DIRECTIONAL
ADJUSTABLE SWIVEL HEADS



CRI90+
RICH AND NATURAL COLORS



5 COLOR
TEMPERATURE OPTIONS



IC RATED
CANLESS SOLUTION



**HEAD
QUANTITY**

1pc, 2pcs, 3pcs




**AVAILABLE
POWER**

15W, 30W, 45W



**COLOR
SELECTABLE**

2700K-5000K



LED TRIMLESS DOWNLIGHT

ASD-CD-T



TWIST-LOCK DESIGN



CRI90+
RICH AND NATURAL COLORS

white



5 COLOR
TEMPERATURE OPTIONS



IC RATED
CANLESS SOLUTION

black



PRODUCT
SIZE
1"-6"



AVAILABLE
POWER
7W-24W



COLOR
SELECTABLE
2700K-5000K



BATTERY
BACK-UP KIT



MORE THAN 1000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



COLOR
SELECTABLE




5 COLOR
TEMPERATURE OPTIONS




EASILY ADJUSTABLE
VIA DIP SWITCH



ROUND SHAPE

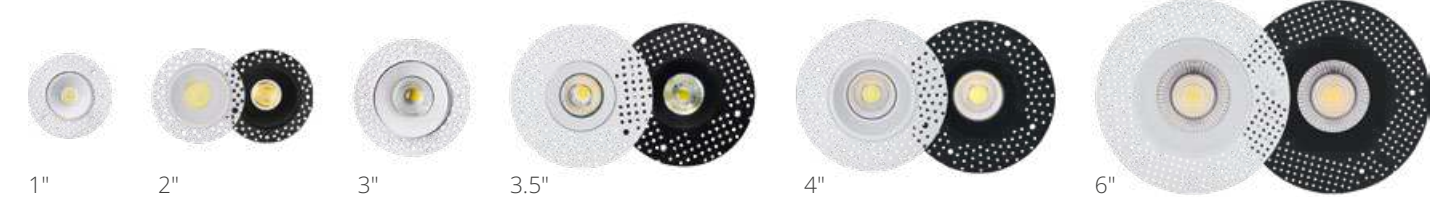


SQUARE SHAPE

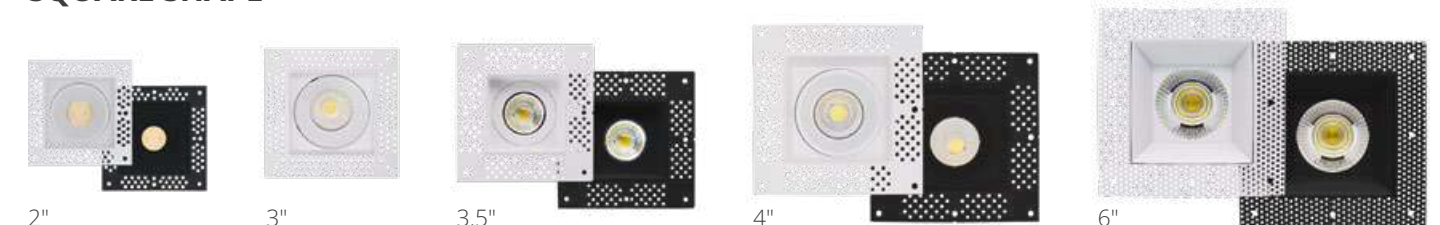

LED TRIMLESS DOWNLIGHT GIMBAL

ASD-CD-TG

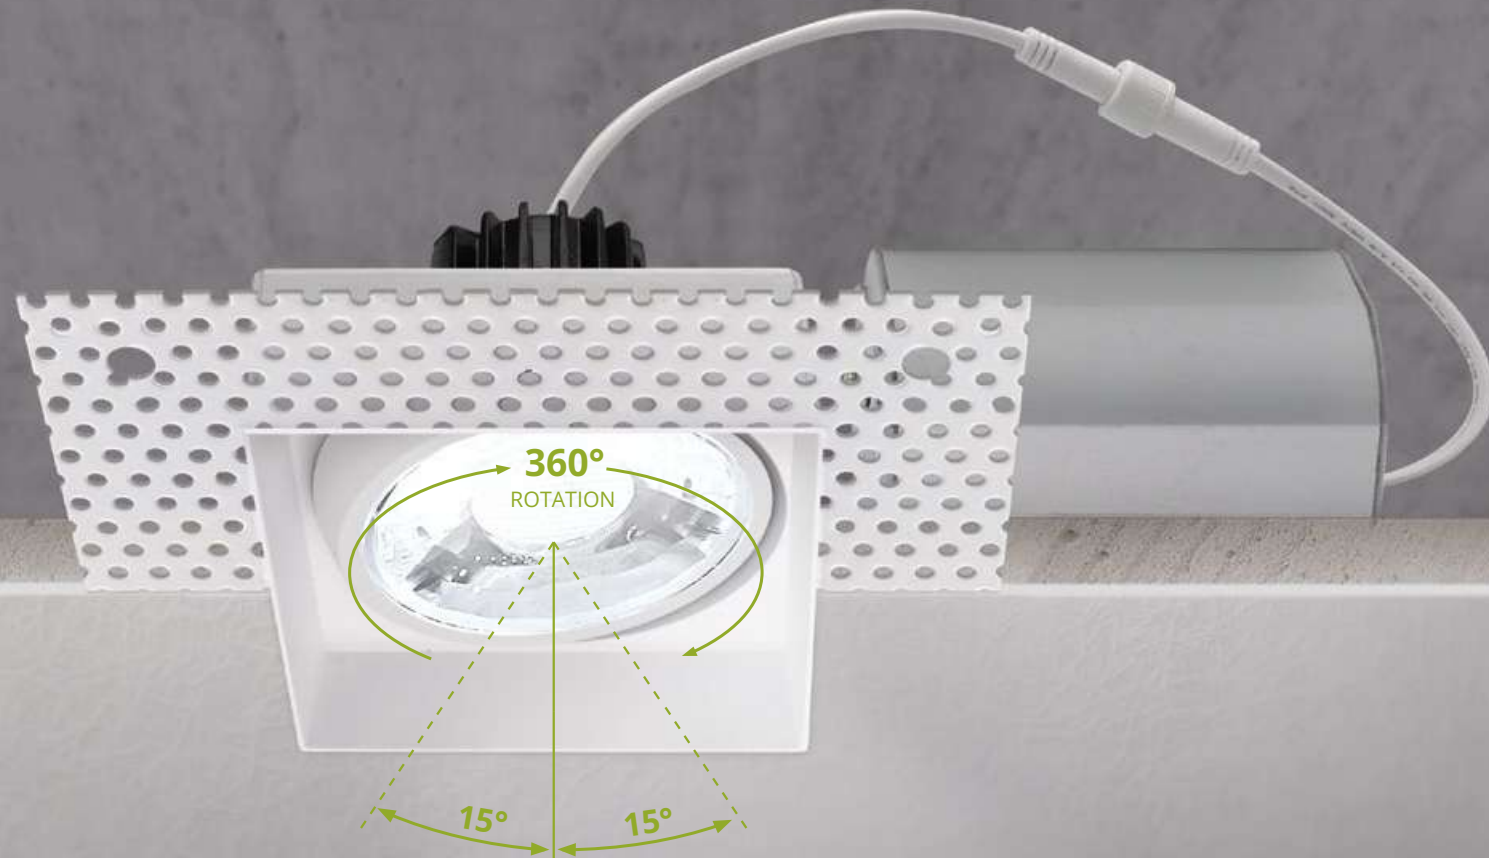

SWIVEL LENS WITH 30° TILT
FOR DIRECTIONAL LIGHT CONTROL



CRI90+
RICH AND NATURAL COLORS

white



5 COLOR
TEMPERATURE OPTIONS



IC RATED
CANLESS SOLUTION

black



120V
voltage



2.5kV
Surge
protection



PRODUCT
SIZE

2", 3", 4"



AVAILABLE
POWER

8W, 12W, 17W



COLOR
SELECTABLE

2700K-5000K



BATTERY
BACK-UP KIT



MORE THAN 1000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



COLOR
SELECTABLE




5 COLOR
TEMPERATURE OPTIONS



EASILY ADJUSTABLE
VIA DIP SWITCH



ROUND SHAPE

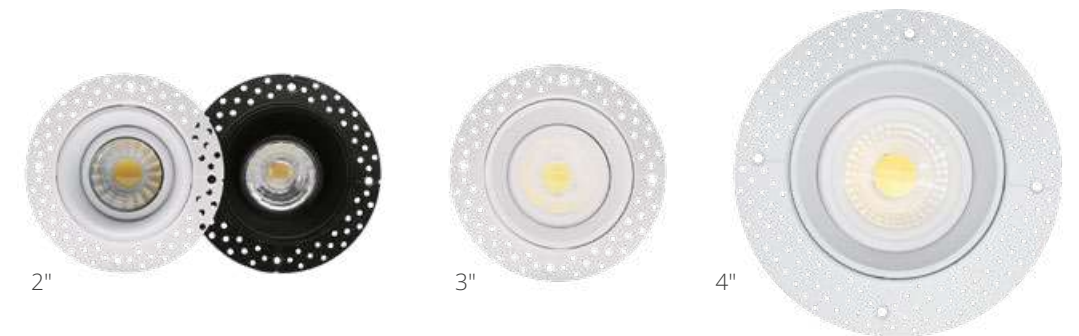

SQUARE SHAPE



LED DOWNLIGHT 1 & 2 INCH

ASD-CD-P



DURABLE AIRTIGHT ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION



5 COLOR
TEMPERATURE OPTIONS



CRI90+
RICH AND NATURAL COLORS



IC RATED
CANLESS SOLUTION

white

black



PRODUCT
SIZES

1", 2"



AVAILABLE
POWER

7W, 8W, 15W



COLOR
SELECTABLE

2700K-5000K



BATTERY
BACK-UP KIT



MORE THAN 1000lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



WASH TRIM
ASD-CD-PWR



HOUSING
WITH WASH TRIM



MULTIFACETED SPECULAR REFLECTOR
WITH A 38° BEAM ANGLE



ACCENT LIGHTING
WITH DIRECTIONAL CONTROL



ROUND SHAPE



1"



2"

ROUND SHAPE
WITH WASH TRIM



2"

SQUARE SHAPE



1"



2"

LED ROUND COMMERCIAL DOWNLIGHT

ASD-CDL7



COLOR AND POWER
SELECTABLE



CRI90+
RICH AND NATURAL COLORS



IC RATED
CANLESS SOLUTION



WET LOCATIONS
RATED

white

black



120-277V
voltage



2.5kV
Surge
protection



PRODUCT
SIZE
4"-10"



POWER
ADJUSTABLE
13W, 22W, 30W, 40W



COLOR
SELECTABLE
2700K-5000K



BATTERY
BACK-UP KIT




MORE THAN 1700lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



COLOR AND POWER
SELECTABLE



COLOR SELECTABLE



POWER ADJUSTABLE



ROUND SHAPE



4"



6"



8"



10"

LED COMMERCIAL DOWNLIGHT

ASD-CDL7R ROUND
ASD-CDL7S SQUARE

125
lm/W
EFFICIENCY



COLOR AND POWER
SELECTABLE



CRI90+
RICH AND NATURAL COLORS



IC RATED
CANLESS SOLUTION



WET LOCATIONS
RATED



PRODUCT
SIZE

6", 8", 10"



POWER
ADJUSTABLE

30W, 35W, 40W



COLOR
SELECTABLE

2700K-5000K



BATTERY
BACK-UP



MORE THAN 1700lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



OVERCHARGE
AND OVER-DISCHARGE PROTECTION



COLOR AND POWER
SELECTABLE



COLOR SELECTABLE



POWER ADJUSTABLE



BUILT-IN BATTERY BACK-UP



BATTERY BACK-UP KIT




ROUND SHAPE



ROUND SHAPE WITH BATTERY BACK-UP



SQUARE SHAPE

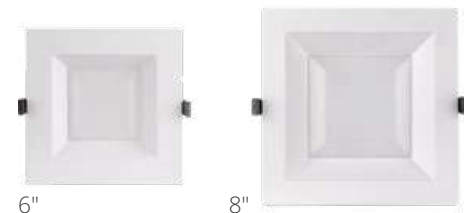

LED ROUND RECESSED MINI PANEL WITH BAFFLE TRIM

ASD-JBRB-MV



- OPERATES ON 120-277V WITH 0-10V DIMMING
- 5 COLOR TEMPERATURE OPTIONS
-
- HEAVY DUTY SPRING CLIPS WITH INCREASED HEIGHT
- AIR TIGHT AND IC RATED CANLESS SOLUTION
-

PRODUCT SIZE
4", 6"

AVAILABLE POWER
12W, 15W

COLOR SELECTABLE
2700K-5000K

LED ROUND RECESSED MINI PANEL FIRE RATED

ASD-JFR



- 2 HOUR FIRE RESISTANCE DUE TO REINFORCED AND HEAT RESISTANT STEEL BODY
- CRI90+ RICH AND NATURAL COLORS
-
- HEAVY DUTY COMMERCIAL GRADE SPRING CLIPS WITH INCREASED HEIGHT
- AIR TIGHT AND IC RATED CANLESS SOLUTION
-

PRODUCT SIZE
4", 6"

AVAILABLE POWER
12W, 15W

COLOR SELECTABLE
2700K-5000K

LED LOW-PROFILE CANOPY WITH Q-BASE

ASD-CAN07A

140
lm/W
EFFICIENCY



- BUILT-IN Q-BASE**
- INFRARED, MICROWAVE SENSORS WITH REMOTE CONTROL
- INFRARED, MICROWAVE NLS SENSORS WITH ASD NLS APP

- BUILT-IN BATTERY BACK-UP**
- MORE THAN 2200lm IN EMERGENCY MODE FOR 90min
- AUTOMATIC SELF-TESTING



Q-BASE



3 COLOR TEMPERATURE OPTIONS

white



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES

black



AVAILABLE POWER

45W, 70W



COLOR SELECTABLE

3000K-5000K



LED EDGE-LIT CANOPY SQUARE WITH Q-BASE

ASD-CAN09S

140
lm/W
EFFICIENCY



- COLOR AND POWER SELECTABLE**
- 3CCT COLOR SELECTABLE
- 3PA POWER ADJUSTABLE

- BUILT-IN BATTERY BACK-UP**
- MORE THAN 1300lm IN EMERGENCY MODE FOR 90min
- AUTOMATIC SELF-TESTING



Q-BASE



COLOR AND POWER SELECTABLE

white



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES

black



POWER ADJUSTABLE

50W, 80W



COLOR SELECTABLE

3000K-5000K



LED AREA LIGHT STANDARD series

ASD-LSB5B

150
lm/W
STANDARD
SERIES



DIE-CAST ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION



10KV SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES



3G 3G VIBRATION RATING THAT CONFORMS
TO STANDARDS FOR ROADWAY



SHOEBOX, WALLPACK, FLOODLIGHT
OR STREETLIGHT BRACKETS



AVAILABLE
POWER

150W-300W



COLOR
TEMPERATURE

5000K




BUILT-IN
PHOTOCELL



BUILT-IN
DUSK TO DAWN PHOTOCELL



PHOTOCELL
WITH ON/OFF SWITCH

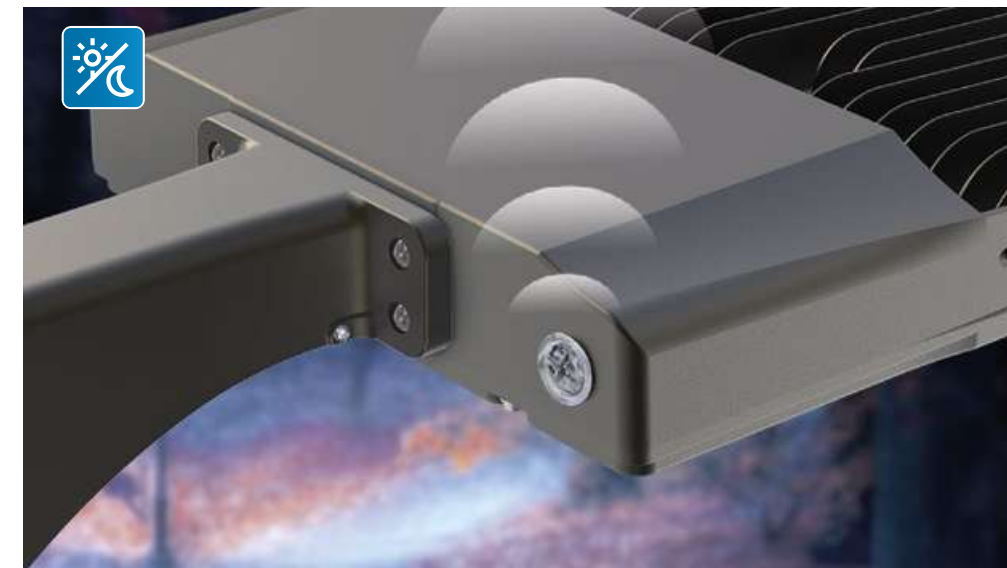

**ARM MOUNTING
BRACKET**

ASD-AM-LSB5-BR
(for round & square poles)



**ADJUSTABLE ARM
MOUNTING BRACKET**

ASD-AMR-LSB-BR
(for round & square poles)



**FLOODLIGHT MOUNTING
BRACKET**

ASD-FM2-LSB5-BR



**SLIP FITTER
MOUNTING BRACKET**

ASD-SF-LSB5-BR
(for poles Ø2")



**FULL TRUNNION
MOUNTING BRACKET**

ASD-TR-LSB-BR



**WALL MOUNTING
BRACKET**

ASD-WMB-LSB-BR



**DUAL BULL
TENON BRACKET**

ASD-B2BT



**TRIPLE BULL
TENON BRACKET**

ASD-B3BT



TENON BRACKET

ASD-TN-BR

LED AREA LIGHT WITH Q-BASE

PRO series

ASD-LSB5B-PRO

170
lm/W
PRO

COLOR AND POWER SELECTABLE

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



Q-BASE





10KV SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES



COLOR AND POWER SELECTABLE




3G VIBRATION RATING



POWER ADJUSTABLE
150W-500W



COLOR SELECTABLE
3000K-5000K



BUILT-IN Q-BASE



INFRARED, MICROWAVE SENSORS WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS WITH ASD NLS APP



REMOTE CONTROL Sold separately



BUILT-IN PHOTOCELL



BUILT-IN DUSK TO DAWN PHOTOCELL



PHOTOCELL WITH ON/OFF SWITCH



ARM MOUNTING BRACKET
ASD-AM-LSB5-BR
(for round & square poles)



ADJUSTABLE ARM MOUNTING BRACKET
ASD-AMR2-LSB-SL
(for round & square poles)



FLOODLIGHT MOUNTING BRACKET
ASD-FM3-LSB5B-BK



SLIP FITTER MOUNTING BRACKET
ASD-SF-LSB5-BR
(for poles Ø2")



FULL TRUNNION MOUNTING BRACKET
ASD-TR2-LSB-WH



WALL MOUNTING BRACKET
ASD-WMB-LSB-BR



DUAL BULL TENON BRACKET
ASD-B2BT



TRIPLE BULL TENON BRACKET
ASD-B3BT



TENON BRACKET
ASD-TN-BR

LED ROUND AREA LIGHT WITH Q-BASE

ASD-LSB5R-PRO

170
lm/W
SERIES
PRO



Q-BASE



10KV SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES



COLOR AND POWER
SELECTABLE



1.5G VIBRATION RATING



POWER
ADJUSTABLE

100W



COLOR
SELECTABLE

3000K-5000K



BUILT-IN
Q-BASE



INFRARED, MICROWAVE SENSORS
WITH REMOTE CONTROL



INFRARED, MICROWAVE NLS SENSORS
WITH ASD NLS APP



REMOTE CONTROL
Sold separately



BUILT-IN
PHOTOCELL



BUILT-IN
DUSK TO DAWN PHOTOCELL



PHOTOCELL
WITH ON/OFF SWITCH




COLOR AND POWER
SELECTABLE



COLOR SELECTABLE



POWER ADJUSTABLE

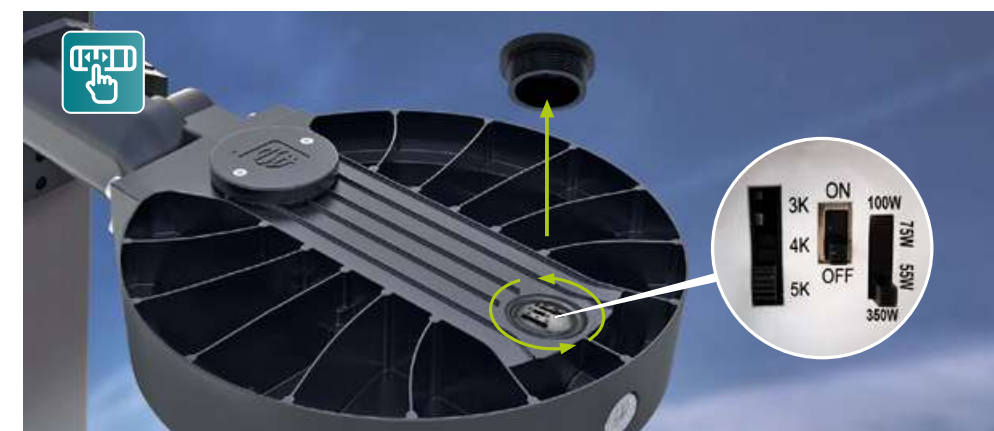

POST BRACKET
ASD-POST-LSB5



ARM MOUNTING
BRACKET
ASD-AM-LSB5-BK
(for round & square poles)



ADJUSTABLE ARM
MOUNTING BRACKET
ASD-AMR-LSB5-BK
(for round & square poles)



SLIP FITTER
MOUNTING BRACKET
ASD-SF-LSB5-BK
(for poles Ø2")



FULL TRUNNION
MOUNTING BRACKET
ASD-TR-LSB5-BK

MOUNTING BRACKETS

FOR LED AREA LIGHTS

-  DIE-CAST ALUMINUM HOUSING
-  ROUND, SQUARE POLE AND WALL INSTALLATION



ARM MOUNTING BRACKET
ASD-AM-LSB5
(for round & square poles)



ADJUSTABLE ARM MOUNTING BRACKET
ASD-AMR-LSB
(for round & square poles)



FULL TRUNNION MOUNTING BRACKET
ASD-TR-LSB



FLOODLIGHT MOUNTING BRACKET
ASD-FM-LSB5B



POST BRACKET
ASD-POST-LSB5



SLIP FITTER MOUNTING BRACKET
ASD-SF-LSB5 (for poles Ø2")

- white
- silver
- bronze
- black

MOUNTING BRACKETS

FOR LED AREA LIGHTS

-  3MM GALVANIZED STEEL HOUSING
-  WOOD, STEEL AND CONCRETE POLES INTALLATION



WALL MOUNTING BRACKET
ASD-WMB-LSB



DUAL BULL TENON BRACKET
ASD-B2BT



TENON BRACKET
ASD-TN-BR



TRIPLE BULL TENON BRACKET
ASD-B3BT

LED SPORT LIGHT

ASD-SPFL7


150
lm/W
EFFICIENCY

-  DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION
-  SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES
-  CRI80+ RICH AND NATURAL COLORS
-  3G VIBRATION RATING

LENS BEAM ANGLES:
300 – 500W
Default – 45°;
Option – 30°
750 – 1300W
Default – 40°;
Option – 20°

W POWER ADJUSTABLE
300W, 500W, 750W,
1000W, 1300W

K COLOR TEMPERATURE
5000K



LED SPORT LIGHT WITH DMX & RGBW

ASD-SPFL7-DMX

RGBW RGBW LIGHTING
 RGBW DESIGN WITH RED, GREEN, BLUE, WHITE COLORS OR ITS COMBINATIONS
 SUITABLE FOR HIGHLY DYNAMIC LIGHT SHOWS


DMX DMX CONTROL
 DMX PROTOCOL
 SUITABLE FOR HIGHLY DYNAMIC LIGHT SHOWS

-  DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION
-  SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES
-  CRI80+ RICH AND NATURAL COLORS
-  3G VIBRATION RATING

LENS BEAM ANGLES:
300 – 500W
Default – 45°;
Option – 30°

W AVAILABLE POWER
450W, 500W

5CCT COLOR SELECTABLE
2700–6500–RGBW



LED SPORT LIGHT

ASD-SPFL8



140
lm/W
EFFICIENCY

DMX 0-10V, DMX, DALI CONTROL

DMX 0-10V, DMX, DALI PROTOCOL

SUITABLE FOR HIGHLY DYNAMIC LIGHT SHOWS

LENS BEAM ANGLES:

1600 – 1800W

Default – 17°



DIE-CAST ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION



SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES



CRI80+
RICH AND NATURAL COLORS



3G VIBRATION RATING



**AVAILABLE
POWER**

1600W, 1800W



**COLOR
TEMPERATURE**

5000K



LED SECURITY WALLPACK WITH PHOTOCELL

ASD-SWP



**BUILT-IN
BATTERY BACK-UP**



MORE THAN 400lm
IN EMERGENCY MODE FOR 90min



AUTOMATIC
SELF-TESTING



**BUILT-IN
PHOTOCELL**



BUILT-IN
DAYLIGHT SENSOR



PHOTOCELL
WITH ON/OFF SWITCH



ANTI-GLARE PC LENS



EVEN LIGHT
DISTRIBUTION



3 COLOR
TEMPERATURE OPTIONS



WET LOCATIONS
RATED



**POWER
ADJUSTABLE**

28W



**COLOR
SELECTABLE**

3000K-5000K



LED TRADITIONAL WALLPACK

ASD-WLP01



BUILT-IN BATTERY BACK-UP

- MORE THAN 2300lm IN EMERGENCY MODE FOR 90min
- AUTOMATIC SELF-TESTING

BUILT-IN PHOTOCELL

- BUILT-IN DUSK TO DAWN PHOTOCELL
- PHOTOCELL WITH ON/OFF SWITCH



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION




3 COLOR TEMPERATURE OPTIONS



TEMPERED GLASS LENS



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES



POWER ADJUSTABLE
50W, 80W, 120W



COLOR TEMPERATURE
3CCT, 5000K



LED ADJUSTABLE CUTOFF WALLPACK

ASD-WLP02A



BUILT-IN PHOTOCELL

- BUILT-IN DUSK TO DAWN PHOTOCELL
- PHOTOCELL WITH ON/OFF SWITCH



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES



ADJUSTABLE CUTOFF DESIGN 0-90°



3 COLOR TEMPERATURE OPTIONS



AVAILABLE POWER
12W, 30W, 50W



COLOR SELECTABLE
3000K-5000K



LED FULL CUTOFF WALLPACK

ASD-WLP03



COLOR AND POWER SELECTABLE

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE

PHOTOCELL KIT

DUSK TO DAWN PHOTOCELL

PHOTOCELL WITH ON/OFF SWITCH



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



FULL CUTOFF DESIGN WITH DIRECTED LIGHT



ANTI-GLARE PC LENS WITH EVEN LIGHT DISTRIBUTION



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES



POWER ADJUSTABLE

50W, 80W, 120W



COLOR SELECTABLE

3000K-5000K



LED SLIM WALLPACK

ASD-WLS

BUILT-IN PHOTOCELL

BUILT-IN DUSK TO DAWN PHOTOCELL

PHOTOCELL WITH ON/OFF SWITCH

COLOR AND POWER SELECTABLE

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION




REMOVABLE HINGE DOOR FOR QUICK AND EASY WIRING



TEMPERED GLASS LENS FOR HIGH ILLUMINANCE



SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES



POWER ADJUSTABLE

50W-120W



COLOR SELECTABLE

3000K-5000K



LED WALLPACK ROUND

ASD-WLR

150
lm/W
EFFICIENCY



BUILT-IN PHOTOCELL

BUILT-IN DUSK TO DAWN PHOTOCELL

PHOTOCELL WITH ON/OFF SWITCH

COLOR AND POWER SELECTABLE

3CCT COLOR SELECTABLE

3PA POWER ADJUSTABLE



DIE-CAST ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



ANTI-GLARE PC LENS WITH EVEN LIGHT DISTRIBUTION



DOWN OR UP & DOWN ILLUMINATION



COLOR AND POWER SELECTABLE



LIGHT DIRECTION

Down, up & down



POWER ADJUSTABLE

60W, 120W



COLOR SELECTABLE

3000K-5000K



LED VAPOR TIGHT JELLY JAR LIGHT

ASD-VTJ

BUILT-IN PHOTOCELL

BUILT-IN DUSK TO DAWN PHOTOCELL

PHOTOCELL WITH ON/OFF SWITCH



DURABLE COMMERCIAL GRADE HOUSING RESISTANT TO RUST AND IMPACT



BUILT-IN PHOTOCELL WITH ON/OFF SWITCH



RGBW WITH SIMPLE SWITCH



SURGE PROTECTION AGAINST VOLTAGE SPIKES AND CURRENT SURGES



POWER ADJUSTABLE

20W



COLOR SELECTABLE

3000K-5000K-RED-GREEN-BLUE



LED SECURITY FLOODLIGHT RECTANGULAR HEADS

ASD-SFL



OPERATING MODE	ON TIME / AUTO / D2D
DETECTION DISTANCE	19 – 60ft (5.8 – 18m) adjustable
INSTALLATION HEIGHT	8.2ft (2.5m)
AMBIENT LIGHT	< 10Lux (< 0.9fc)
HOLD-TIME	10s – 10min
DETECTION MOTION SPEED	0.6 – 1.5m/s
DETECTION RANGE	Horizontal 180°, Vertical 180°

- ROTATABLE LIGHT HEADS FOR DIRECTIONAL LIGHT CONTROL
- 5 COLOR TEMPERATURE OPTIONS

- INSTALLATION ON A REGULAR JUNCTION BOX
- WET LOCATIONS RATED
- white
- black

 AVAILABLE POWER
20W

 COLOR SELECTABLE
2700K-5000K



-  **BUILT-IN MOTION SENSOR**
ASD-SFL, ASD-SFL-SC
-  FLEXIBLE SETTINGS:
ON TIME/AUTO/D2D
-  **ON** ON-TIME: WORKS LIKE A NORMAL LAMP WITHOUT SENSING
-  **D2D** D2D DUSK TO DAWN: AUTOMATICALLY TURNS ON AT DUSK AND OFF AT DAWN
-  **AUTO** AUTO: AUTO ON & OFF BASED ON MOTION DETECTION AND LUX REQUIREMENT SETTINGS

-  **BUILT-IN PHOTOCELL**
ASD-SFL
-  BUILT-IN DAYLIGHT SENSOR
-  FLEXIBLE SETTINGS:
ON TIME/AUTO/D2D

-  **BUILT-IN CAMERA**
ASD-SFL-SC
-  CONTROLLED BY SMART APP ON YOUR SMARTPHONE
-  SMART SECURITY CAMERA WITH MICRO SD CARD
-  **FULL HD** 1296P FULL HD VIDEO STREAMING AND RECORDING
-  WORKS WITH ALEXA AND GOOGLE ASSISTANT



ASD NLS

SMART LIGHTING MADE EFFORTLESS



ASD NLS is a professional-grade smart control application designed to manage and control lighting fixtures in commercial properties. With ASD NLS, you can conveniently control your lights from your smartphone or PC, anytime and anywhere.

You can group fixtures by rooms, floors and objects, and create schedules based on day and time. You can also grant permanent or temporary permissions to employees and guests with different access levels. Our smart platform enables you to monitor energy usage statistics, view the status of each fixture, and much more.

Scan QR codes to view operating manuals.



desktop manual



smartphone manual



FIXTURE CONTROL

Set brightness, standby time and dimming level, or apply scenes and schedules.



SCHEDULING

Set a variety of customizable start / end actions based on time of day and days of the week.



ADVANCED AREA MANAGEMENT

Create and customize projects for different types of areas, buildings, floors and zones.



CONTROL PERMISSIONS

Give your staff or installers control over the lighting.



ADVANCED ENERGY CONSUMPTION

Monitor equipment status and receive daily reports.




PROJECT OVERVIEW

Monitor device status and daily reports.



ASD NLS. NETWORK LIGHTING SOLUTION FOR ALL APPLICATIONS

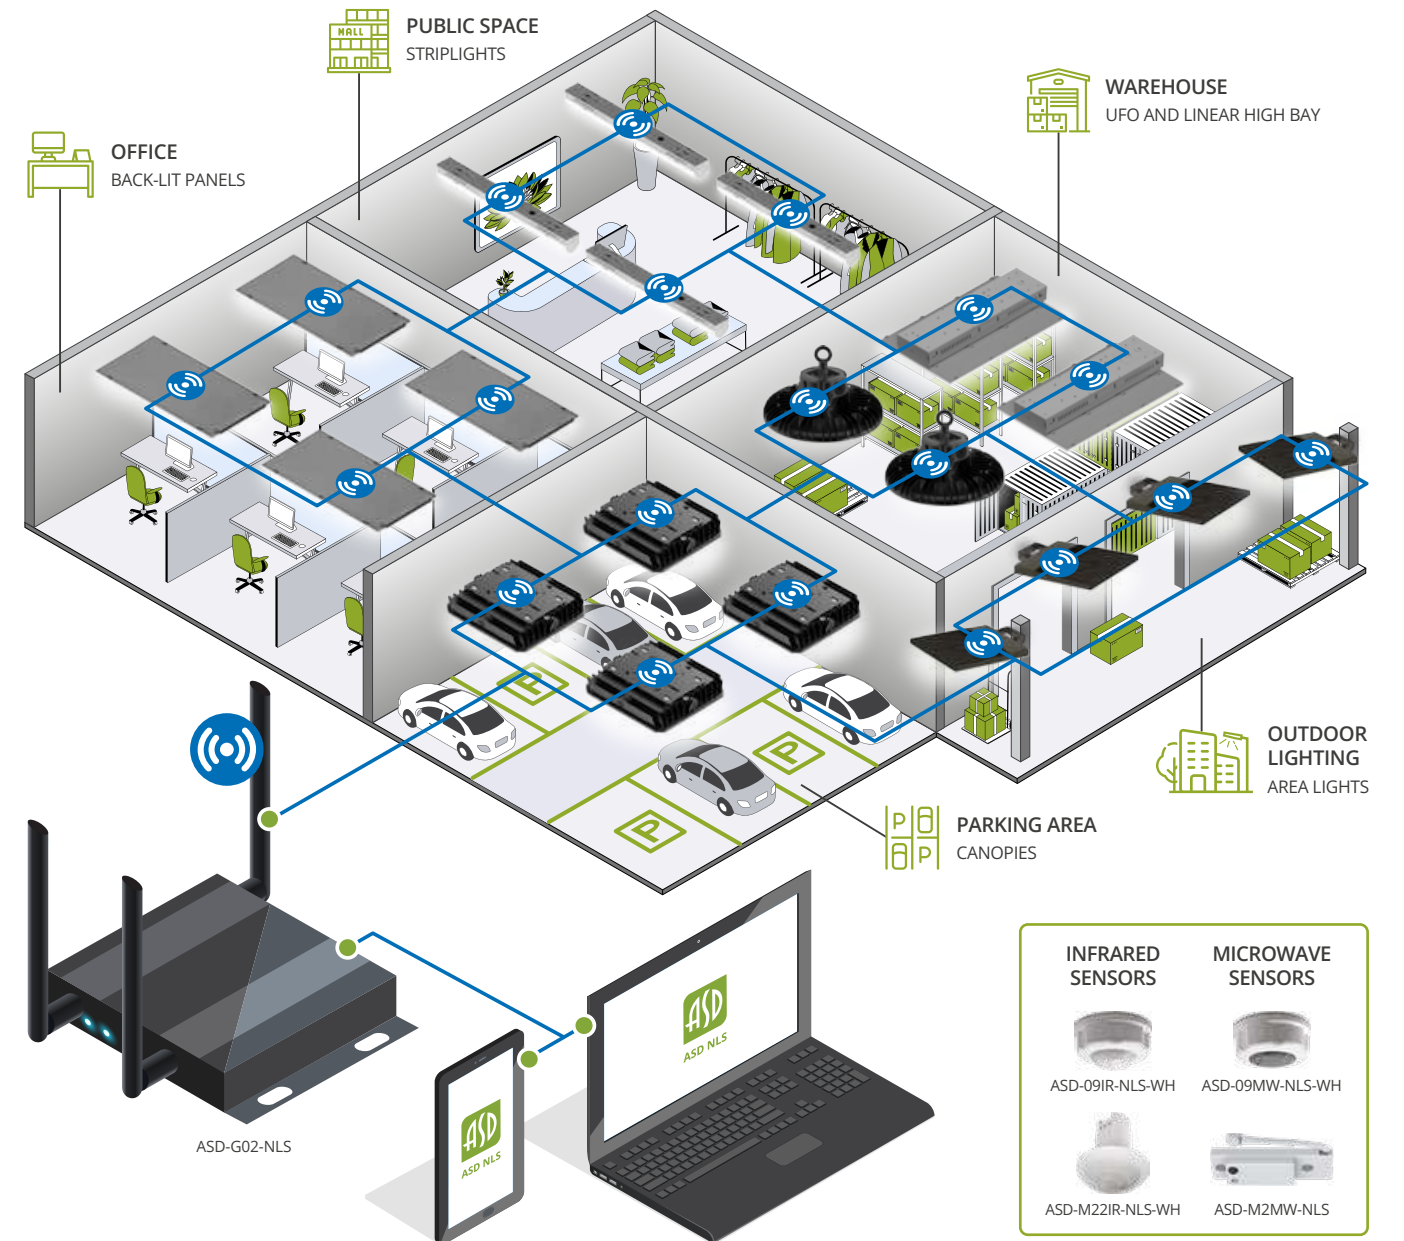

BACK-LIT PANELS



STRIPLIGHTS



LINEAR HIGH BAY



UFO HIGH BAY



CANOPIES



AREA LIGHTS

NLS Q-BASE MOTION SENSOR

Microwave Motion Sensor NLS
With magnet base



ASD-M2MW-NLS

Infrared Motion Sensor NLS
With clip-in base



ASD-M22IR-NLS-WH


SETTINGS
DETECTION AREA
HOLDTIME
DAYLIGHT THRESHOLD
STAND-BY DIMMING LEVEL
STAND-BY PERIOD

ASD-M2MW-NLS

DEFAULT	ADJUSTMENTS
100%	25% – 100%
10min	5s – 30min
DISABLE	2 – 2000Lux
10%	10 – 50%
0s	0s – +∞

ASD-M22IR-NLS-WH

DEFAULT	ADJUSTMENTS
100%	25% – 100%
30s	30s – 60min
DISABLE	50 – 2000Lux
10%	10 – 50%
0s	0s – +∞



ASD-06RC



BACK-LIT PANELS WITH ASD-M2MW-NLS



STRIPLIGHTS WITH ASD-M22IR-NLS-WH

NLS MOTION SENSOR WITH 3-PIN BASE

Infrared Motion Sensor NLS
Installation height – 39ft



ASD-09IR-NLS-WH

Microwave Motion Sensor NLS
Installation height – 49ft



ASD-09MW-NLS-WH

SETTINGS
DETECTION AREA
HOLDTIME
DAYLIGHT THRESHOLD
STAND-BY DIMMING LEVEL
STAND-BY PERIOD

DEFAULT
100%
10min
DISABLE
10%
0s

ADJUSTMENTS
25% – 100%
5s – 30min
2 – 400Lux
0 – 50%
0s – +∞



ASD-06RC



GATEWAY ASD-G02-NLS



LINEAR HIGH BAY



UFO HIGH BAY



CANOPIES



AREA LIGHTS

Q-BASE MOTION SENSOR

Microwave Motion Sensor

With magnet base



ASD-M2MW-WH

With audio-jack base



ASD-08MW-WH

Infrared Motion Sensor

With clip-in base



ASD-M22IR-WH

	ASD-M2MW-WH		ASD-08MW-WH		ASD-M22IR-WH	
SETTINGS	DEFAULT	ADJUSTMENTS	DEFAULT	ADJUSTMENTS	DEFAULT	ADJUSTMENTS
DETECTION AREA	100%	25% – 100%	100%	25% – 100%	100%	25% – 100%
HOLDTIME	10min	5s – 30min	10min	5s – 120min	30s	5s – 30min
DAYLIGHT THRESHOLD	DISABLE	2 – 120Lux	DISABLE	2 – 400Lux	DISABLE	2 – 400Lux
STAND-BY DIMMING LEVEL	10%	10 – 50%	10%	10 – 50%	10%	10 – 50%
STAND-BY PERIOD	0s	0s – +∞	0s	0s – +∞	0s	0s – +∞

QUICK ADJUSTMENTS
WITH A REMOTE CONTROL

EASY INSTALLATION

DETECTION
DISTANCE UP TO 26ft

EMERGENCY BACK-UP
COMPATIBILITY



ASD-06RC



BACK-LIT PANELS WITH ASD-M2MW-WH



STRIPLIGHTS WITH ASD-08MW-WH



STRIPLIGHTS WITH ASD-M22IR-WH

MOTION SENSOR WITH 3-PIN BASE

Infrared Motion Sensor

Installation height – 39ft



ASD-09IR-WH ASD-09IR-BK

Installation height – 50ft



ASD-09IR50-WH

Microwave Motion Sensor

Installation height – 49ft



ASD-09MW-WH ASD-09MW-BK

SETTINGS	DEFAULT	ADJUSTMENTS
DETECTION AREA	100%	25% – 100%
HOLDTIME	10min	5s – 30min
DAYLIGHT THRESHOLD	DISABLE	2 – 400Lux
STAND-BY DIMMING LEVEL	10%	0 – 50%
STAND-BY PERIOD	0s	0s – +∞



ASD-06RC

QUICK ADJUSTMENTS WITH BUILT-IN
DIAL OR REMOTE CONTROL

WET LOCATIONS
RATED

INSTALLATION HEIGHT
UP TO 50ft

EMERGENCY BACK-UP
COMPATIBILITY

white

black



LINEAR HIGH BAY



UFO HIGH BAY



CANOPIES



AREA LIGHTS

ASD NLS SMART BATTERY BACK-UP SYSTEM



NLS BATTERY BACK-UP is a specialized power supply designed to connect to lighting devices and ensure their operation in case of main power supply failure. The high capacity of the batteries will allow your fixtures to operate for more than 90 minutes.

One of the key features of NLS BATTERY BACK-UP is the ability to control it via the App. With ASD NLS, you will be able to create battery self-test schedules and see the results of the test, which will allow you to be sure that the emergency function and capacity of the battery pack is normal. With ASD NLS, users can monitor battery status in real time, which adds convenience and control to the management of the emergency lighting system.

Scan QR codes to view operating manuals.



desktop manual



smartphone manual



SCHEDULING

Create a self-testing schedule to check whether the emergency function is normal.



BATTERY STATUS

Real-time battery level and status monitoring.



TEST REPORTS

Battery self-test reports will be stored in your App.




BATTERY FAULT NOTIFICATION

In the event of a battery malfunction (Battery fault, load fault), the corresponding indicator in the App will notify the user.



ASD NLS. NETWORK LIGHTING SOLUTION FOR ALL APPLICATIONS

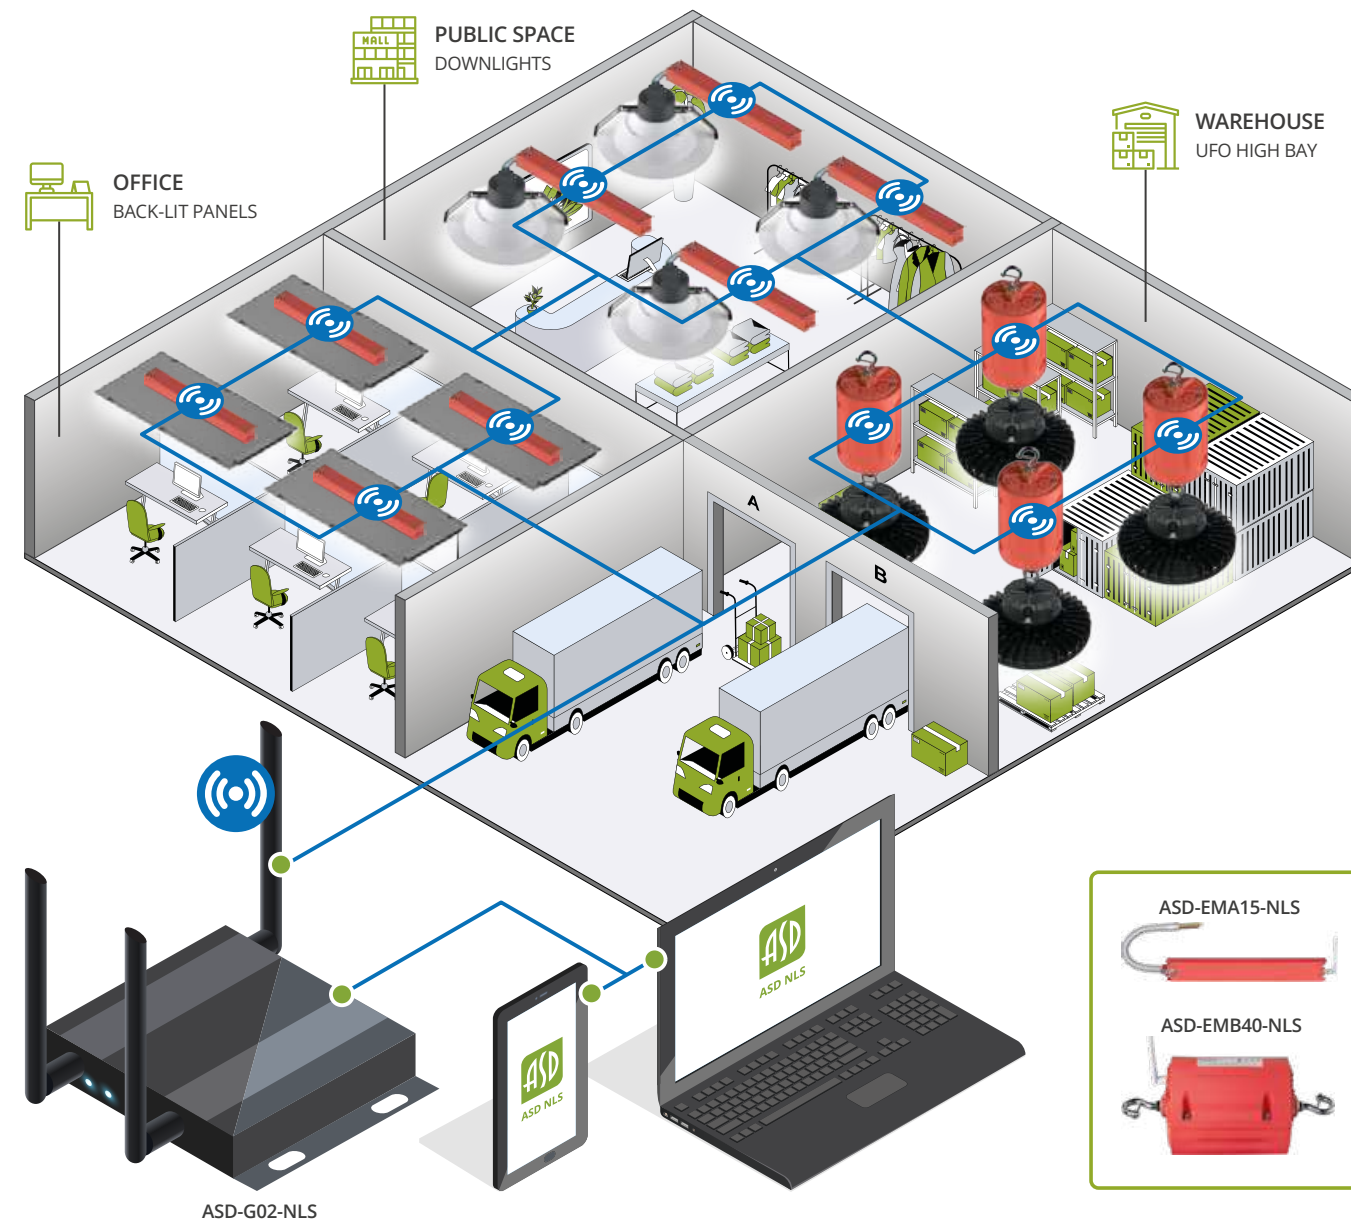

ASD-G02-NLS



BACK-LIT PANELS WITH ASD-EMA15-NLS



DOWNLIGHTS WITH ASD-EMA15-NLS




UFO HIGH BAY WITH ASD-EMB40-NLS

NLS EMERGENCY BATTERY BACK-UP KIT

NLS Battery Back-Up kit
For LED COMMERCIAL DOWNLIGHT

15W

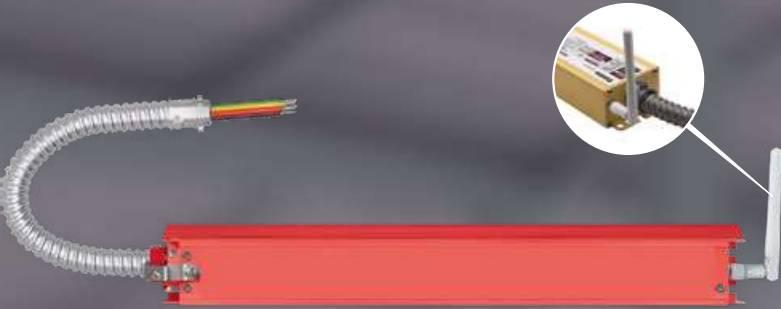

ASD-EMA15-NLS

NLS Battery Back-Up kit
For LED UFO HIGH BAY

40W



ASD-EMB40-NLS

- MORE THAN 90 MINUTES OF OPERATION IN EMERGENCY MODE
- OVERLOAD AND SHORT-CIRCUIT PROTECTION

- REGULAR SELF TESTING
- SMART CONTROL WITH ASD NLS APP



ASD-G02-NLS



DOWNLIGHT WITH ASD-EMA15-NLS



UFO HIGH BAY WITH ASD-EMB40-NLS

EMERGENCY BATTERY BACK-UP KIT

Battery Back-Up kit
For LED UFO HIGH BAY 120-277V

40W 60W



BLD-RM40R
BLD-RM60R

40W 60W



ASD-EMB40
ASD-EMB60

- MORE THAN 90 MINUTES OF OPERATION IN EMERGENCY MODE
- WITH MULTI-PROTECTION FUNCTION

Battery Back-Up kit
For LED UFO HIGH BAY 277-480V

60W



BLD-GM60R-HV

- REGULAR SELF TESTING
- WET LOCATIONS RATED



RN1



UFO HIGH BAY WITH BLD-RM40R



UFO HIGH BAY WITH ASD-EMB60



UFO HIGH BAY WITH BLD-GM60R-HV



EMERGENCY BATTERY BACK-UP KIT

Battery Back-Up kit
For LED LINEAR HIGH BAY

20W 30W



ASD-EMK30W-WHB5A (compatible with WHB5A and WHB5B)
ASD-EMK20W-WHB5B (compatible with WHB5A and WHB5B)

- MORE THAN 90 MINUTES OF OPERATION IN EMERGENCY MODE
- BACK-UP OR AC MODE INDICATOR

- REGULAR SELF TESTING
- MULTI-PROTECTION FUNCTION



LINEAR HIGH BAY WITH EMK20W-WHB5B

EMERGENCY BATTERY BACK-UP KIT

Battery Back-Up kit
For LED COMMERCIAL DOWNLIGHT

8W



BLD-HM08D

Battery Back-Up kit
For LED COMMERCIAL DOWNLIGHT

15W



BLD-HM15D

15W



ASD-EMA15

- MORE THAN 90 MINUTES OF OPERATION IN EMERGENCY MODE
- BACK-UP OR AC MODE INDICATOR

- REGULAR SELF TESTING
- MULTI-PROTECTION FUNCTION



DOWNLIGHT WITH BLD-HM15D





DOWNLIGHT WITH ASD-EMA15





RESIDENTIAL LIGHTING

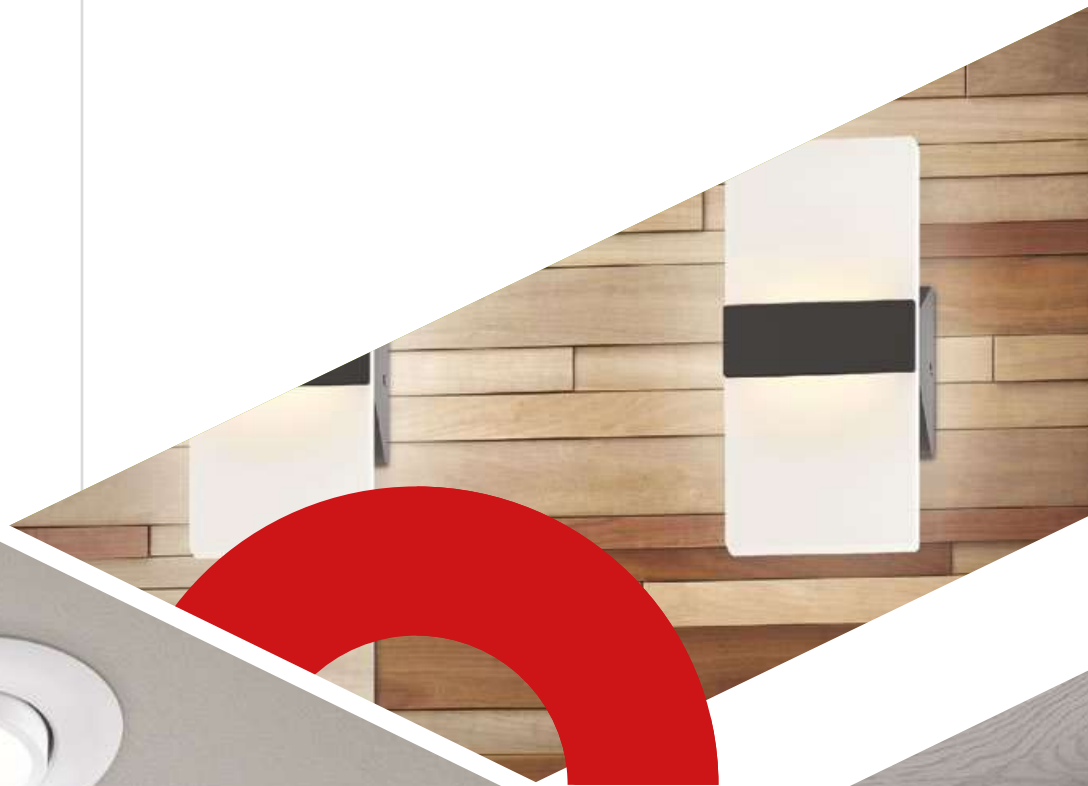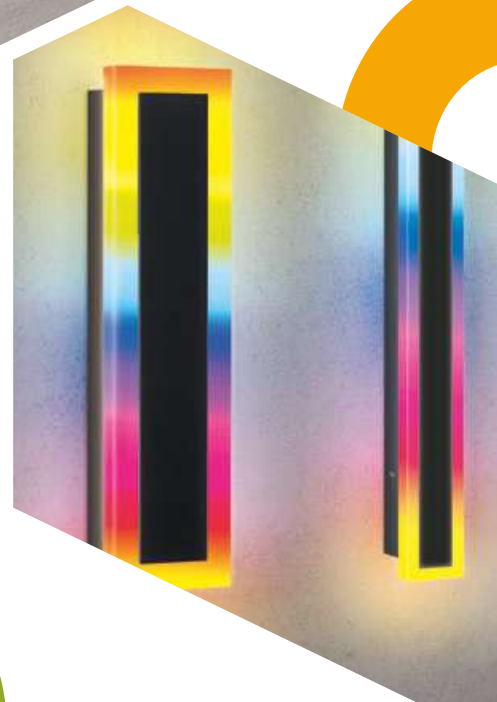

LED FLUSHMOUNT LOFT

ASD-LOFT-FM



CONTEMPORARY SOLUTION
TO REPLACE OLD FLUSHMOUNTS



5 COLOR TEMPERATURE
OPTIONS

nickel



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING

black



PRODUCT SIZE

12", 14", 16", 18",
20"




AVAILABLE
POWER

20W-42W



COLOR
SELECTABLE

2700K-5000K



RGBW LIGHTING
MODELS

ASD-LOFT-FM-RGBW



RGBW DESIGN
WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



COMPATIBLE WITH ALEXA
AND GOOGLE ASSISTANT



PRODUCT SIZE
12", 16", 20"



LED VANITY
LINEAR LOFT

ASD-LOFT-VF



PRODUCT SIZES 24", 36", 48"




AVAILABLE POWER
25W, 30W, 35W



5 COLOR TEMPERATURE
OPTIONS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT

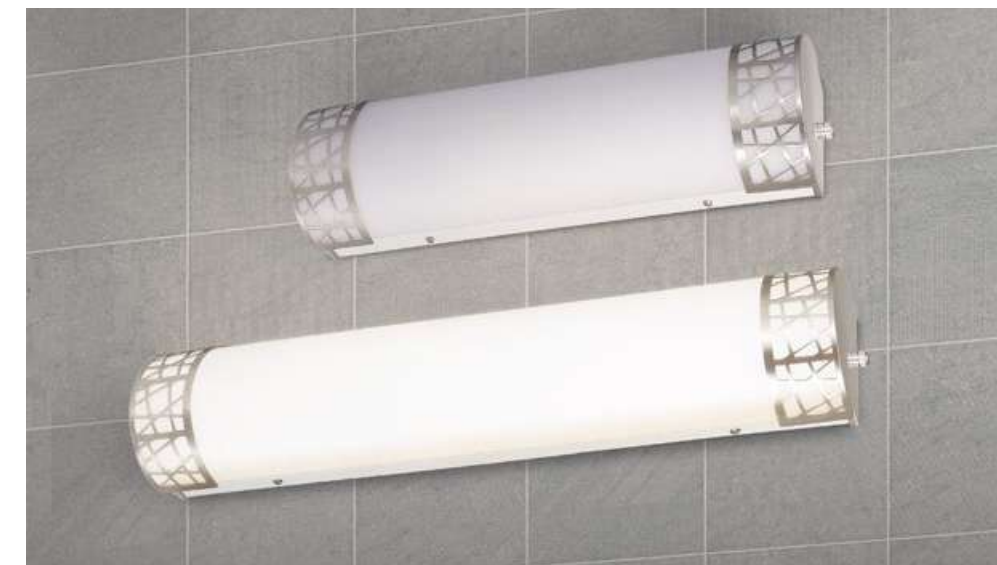

LED WALL
SCONCE LOFT

ASD-LWS-LF



PRODUCT SIZE 12"



AVAILABLE POWER 15W



5 COLOR TEMPERATURE
OPTIONS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



LED DOUBLE RING FLUSHMOUNT

ASD-LFMDR



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



3 COLOR TEMPERATURE
OPTIONS



nickel



bronze



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



2.75" AND 3.5" MOUNTING HOLES
FOR ADVANCED INSTALLATION OPTIONS



black



PRODUCT SIZE

10", 12", 14", 16",
18"




AVAILABLE
POWER

16W-28W



COLOR
SELECTABLE

3000K-5000K



**BUILT-IN
BATTERY BACK-UP**
ASD-LFMDR-EM



BUILT-IN BACK-UP
BATTERY



90 MINUTES OF POWER
IN CASE OF EMERGENCY



BUILT-IN WORKING
MODE INDICATOR



PRODUCT SIZE
12", 14", 16"



**COLOR
SELECTABLE**



3 COLOR TEMPERATURE
OPTIONS



COLOR SELECTABLE
SWITCH ON PLATE



**RGBW LIGHTING
MODELS**
ASD-LFMDR-RGBW



RGBW DESIGN
WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



COMPATIBLE WITH ALEXA
AND GOOGLE ASSISTANT



PRODUCT SIZE
14", 16", 18"



LED OVAL DOUBLE RING FLUSHMOUNT

ASD-FMOV



- ACRYLIC LENS WITH EVEN LIGHT DISTRIBUTION
- OPERATE ON 120-277V CIRCUITS

- 5 COLOR TEMPERATURE OPTIONS
- SEAMLESS TRIAC DIMMING

- nickel
- bronze
- black

PRODUCT SIZE
24", 32"

AVAILABLE POWER
38W, 45W, 50W

COLOR SELECTABLE
2700K-5000K



LED OVAL SURFACE MINI PANEL

ASD-MPO



- CONTEMPORARY SOLUTION TO REPLACE OLD FLUSHMOUNTS
- ACRYLIC LENS WITH EVEN LIGHT DISTRIBUTION

- 5 COLOR TEMPERATURE OPTIONS
- SEAMLESS TRIAC DIMMING

PRODUCT SIZE
32"

AVAILABLE POWER
45W

COLOR SELECTABLE
2700K-6000K



LED SURFACE MINI PANEL

ASD-MP



HIGHLY EFFICIENT
UP TO 100lm/W



CRI90+
RICH AND NATURAL COLORS

white

nickel



5 COLOR TEMPERATURE
OPTIONS



J-BOX, CAN MOUNT, SUB-PLATE
OR PENDANT INSTALLATION

black



PRODUCT SIZE

5", 7", 9", 12", 15",
18", 24", 32"



AVAILABLE
POWER

10W-45W



COLOR
SELECTABLE

2700K-6000K



BUILT-IN PHOTOCELL
& MOTION SENSOR
ASD-MPR-MS



BUILT-IN INFRARED
MOTION SENSOR



BUILT-IN PHOTOCELL



DETECTION RANGE
UP TO 16.4FT



PRODUCT SIZE
7", 9"



BUILT-IN
BATTERY BACK-UP
ASD-MPR-EM



90 MINUTES OF POWER
IN CASE OF EMERGENCY



BUILT-IN WORKING
MODE INDICATOR



PRODUCT SIZE
7", 9", 12"



12W
BATTERY BACK-UP POWER



J-BOX MOUNT INSTALLATION
(for 2.75" and 3.5" mounting holes)



CAN MOUNT INSTALLATION
(for 4" and 6" housings)



SUB-PLATE INSTALLATION
(for 2.75" and 3.5" mounting holes)



PENDANT INSTALLATION
(for 15" and 18" housings)

LED DISK LIGHT

ASD-LDS



LOW-PROFILE DESIGN IS PERFECT FOR SPACES WITH LOW CEILINGS



2.75", 3.5" AND 4" MOUNTING HOLES FOR ADVANCED INSTALLATION OPTIONS



5 COLOR TEMPERATURE OPTIONS



J-BOX OR CAN MOUNT INSTALLATION




PRODUCT SIZE
4", 6"



AVAILABLE POWER
10W, 15W



COLOR SELECTABLE
2700K-5000K



BUILT-IN MOTION SENSOR
ASD-LDS-MS



AUTOMATICALLY SWITCHES ON/OFF



BUILT-IN ADJUSTABLE MOTION SENSOR



DETECTION RANGE UP TO 15ft



PRODUCT SIZE 6"





COLOR SELECTABLE



5 COLOR TEMPERATURE OPTIONS



COLOR SELECTABLE SWITCH ON PLATE

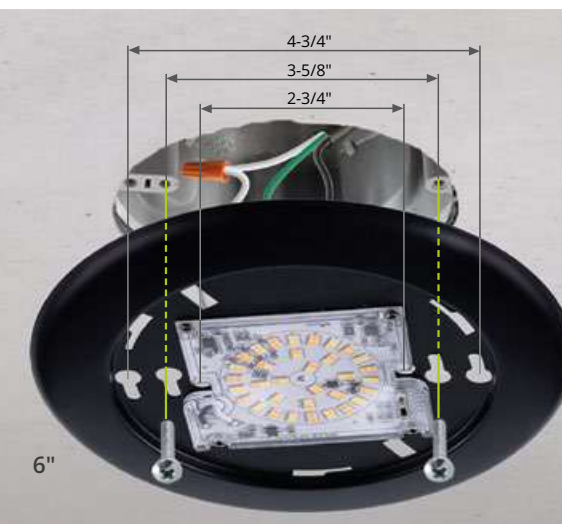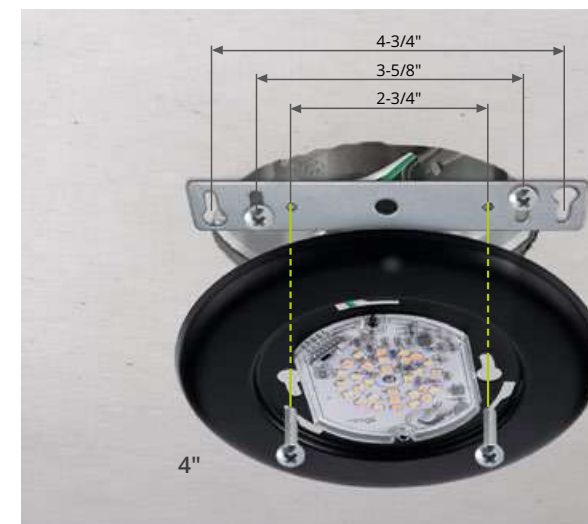

2.75", 3.5" AND 4" MOUNTING HOLES

LED RECESSED MINI PANEL

ASD-JB



LOW-PROFILE DESIGN IS AN IDEAL SOLUTION FOR LOW CEILINGS




CRI90+ RICH AND NATURAL COLORS



5 COLOR TEMPERATURE OPTIONS



IC RATED CANLESS SOLUTION



PRODUCT SIZE
3", 4", 6", 8", 12"



AVAILABLE POWER
6W-24W



COLOR SELECTABLE
2700K-5000K



BATTERY BACK-UP



90 MINUTES OF POWER IN CASE OF EMERGENCY



BUILT-IN WORKING MODE INDICATOR



4.2W BATTERY BACK-UP POWER



BUILT-IN BATTERY BACK-UP ON THE 6" PANEL



BATTERY BACK-UP KIT



RGBW LIGHTING MODELS
ASD-JBR-RGBW



RGBW DESIGN WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP ON YOUR SMARTPHONE



COMPATIBLE WITH ALEXA AND GOOGLE ASSISTANT



PRODUCT SIZE
6"



ROUND SHAPE
With 3", 4", 6", 8" and 12" sizes



SQUARE SHAPE
With 3", 4", 6", 8" and 12" sizes




SQUARE SHAPE WITH ROUND BACK
With 4" and 6" sizes

NEW CONSTRUCTION MOUNTING PLATE

ASD-MPL-FA WITH ASYMMETRIC HOLES



ASD-MPL-FS WITH SYMMETRIC HOLES

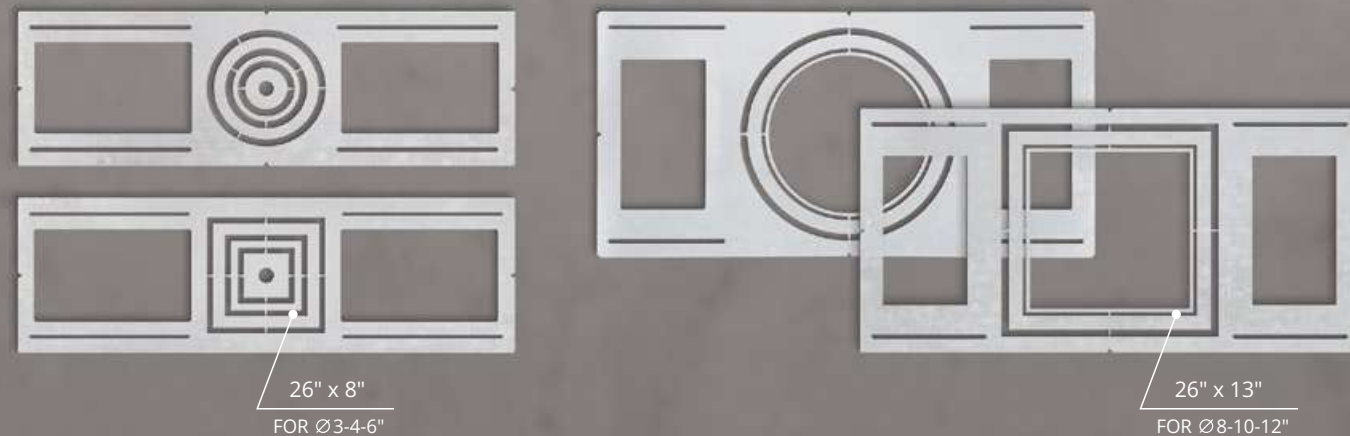

ASD-MPL-SC WITH SLIDING CLIPS



LED DOWNLIGHT RETROFIT KIT

ASD-LRK



PREINSTALLED TP24 AND E26
CONNECTORS FOR EASY INSTALLATION



5 COLOR TEMPERATURE
OPTIONS



CRI90+
RICH AND NATURAL COLORS



WET LOCATIONS
RATED




PRODUCT
SIZE
4", 6"



AVAILABLE
POWER
8.6W, 12W



COLOR
SELECTABLE
2700K-5000K



RETROFIT DOWNLIGHTS

i 156
INFO PAGE



95

LED DOWNLIGHT RETROFIT KIT GIMBAL

ASD-LRK-GB

LED FLAT DOWNLIGHT RETROFIT KIT ROUND

ASD-LRKR-F



SWIVEL LENS WITH 25° TILT
FOR DIRECTIONAL LIGHT CONTROL



5 COLOR TEMPERATURE
OPTIONS

white



PREINSTALLED TP24 AND E26
CONNECTORS FOR EASY INSTALLATION



CRI90+
RICH AND NATURAL COLORS

bronze



PREINSTALLED TP24 AND E26
CONNECTORS FOR EASY INSTALLATION



5 COLOR TEMPERATURE
OPTIONS

white



CRI90+
RICH AND NATURAL COLORS



WET LOCATIONS
RATED

black



PRODUCT
SIZE
4", 6"



AVAILABLE
POWER
10W, 15W



COLOR
SELECTABLE
2700K-5000K



PRODUCT
SIZE
6"



AVAILABLE
POWER
12W




COLOR
SELECTABLE
2700K-5000K



LED VANITY LINEAR LOFT

ASD-LOFT-VF

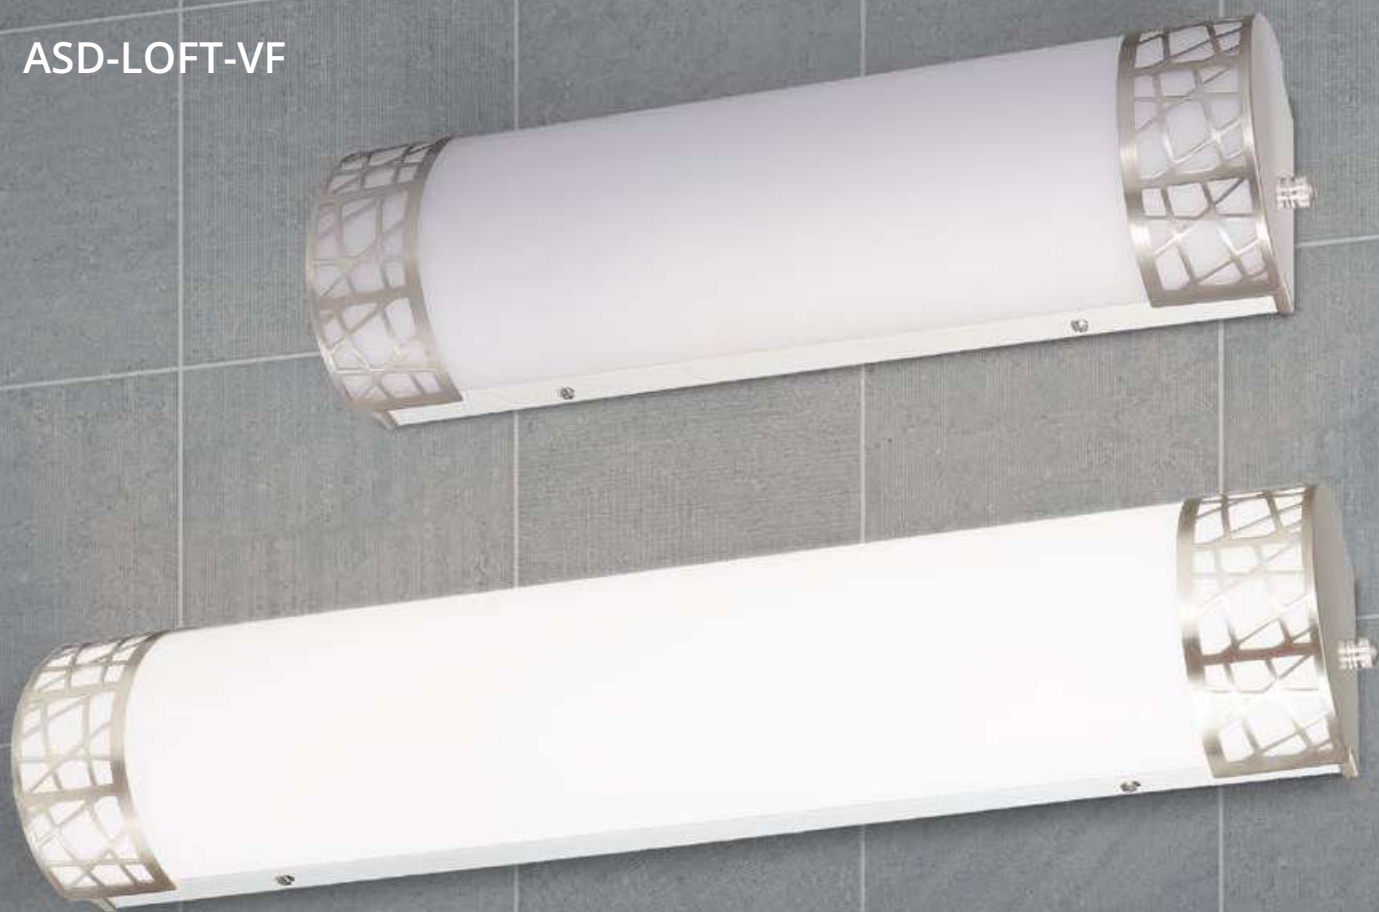

DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



5 COLOR TEMPERATURE
OPTIONS



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



PRODUCT
SIZE

24", 36", 48"



AVAILABLE
POWER

25W, 30W, 35W



COLOR
SELECTABLE

2700K-5000K



LED VANITY LINEAR

ASD-LVF21



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



3 COLOR TEMPERATURE
OPTIONS



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING

nickel

black



PRODUCT
SIZE

18", 24", 36", 48"



AVAILABLE
POWER

20W-35W



COLOR
SELECTABLE

3000K-5000K



LED VANITY LINEAR

ASD-LVF22



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



3 COLOR TEMPERATURE
OPTIONS



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



PRODUCT
SIZE
18", 24"



AVAILABLE
POWER
20W, 25W



COLOR
SELECTABLE
3000K-5000K



LED VANITY LINEAR

ASD-LVF23



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



3 COLOR TEMPERATURE
OPTIONS



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



nickel



black




PRODUCT
SIZE
18", 24", 36", 48"



AVAILABLE
POWER
20W-35W



COLOR
SELECTABLE
3000K-5000K



LED VANITY LIGHT

ASD-LVF24M



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



3 COLOR TEMPERATURE OPTIONS



chrome



ACRYLIC LENS WITH EVEN LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



black



120V voltage



NUMBER OF LIGHTS
2, 3, 4, 5, 6



AVAILABLE POWER
12W-35W



COLOR SELECTABLE
3000K-5000K



VANITY LIGHT & MINI-PENDANT

ASD-VF27 VANITY LIGHT
ASD-MP27 MINI-PENDANT



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



CLEAR GLASS SHADES



STANDARD E26 BASE IS COMPATIBLE WITH A VARIETY OF LED BULBS



QUICK AND EASY HARDWIRED INSTALLATION



120V voltage



NUMBER OF BULBS
1, 2, 3, 4



STANDARD BASE
E26



BULB TYPE
A19, ST58



VANITY LIGHT & MINI-PENDANT

ASD-VF44 VANITY LIGHT
ASD-MP44 MINI-PENDANT



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



STANDARD E26 BASE IS COMPATIBLE
WITH A VARIETY OF LED BULBS



nickel



OPAL GLASS SHADES WITH EVEN
LIGHT DISTRIBUTION



QUICK AND EASY
HARDWIRED INSTALLATION



black



NUMBER
OF BULBS
1, 2, 3, 4



STANDARD
BASE
E26



BULB
TYPE
A19



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT

STANDARD E26 BASE IS COMPATIBLE
WITH A VARIETY OF LED BULBS



OPAL GLASS SHADES WITH EVEN
LIGHT DISTRIBUTION



QUICK AND EASY HARDWIRED
INSTALLATION



NUMBER
OF BULBS
1, 2, 3



STANDARD
BASE
E26



BULB
TYPE
A19



LED WALL SCONCE LOFT

ASD-LOFT-WS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



5 COLOR TEMPERATURE
OPTIONS



nickel



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



black



120V
voltage



PRODUCT
SIZE

12"



AVAILABLE
POWER

15W



COLOR
SELECTABLE

2700K-5000K

LED WALL SCONCE

ASD-LWS-11



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



3 COLOR TEMPERATURE
OPTIONS



nickel



bronze



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



black



120V
voltage



PRODUCT
SIZE

10"



AVAILABLE
POWER

15W



COLOR
SELECTABLE

3000K-5000K

LED WALL SCONCE

ASD-LWS12



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



5 COLOR TEMPERATURE
OPTIONS



nickel



ACRYLIC LENS WITH EVEN
LIGHT DISTRIBUTION



SEAMLESS TRIAC DIMMING



black



PRODUCT
SIZE

8", 12", 14"



AVAILABLE
POWER

10W, 12W, 24W



COLOR
SELECTABLE

2700K-5000K



LED UNDER CABINET BULLNOSE

ASD-UBN



ON / OFF SWITCH



CRI90+
RICH AND NATURAL COLORS



white



5 COLOR TEMPERATURE
OPTIONS



QUICK AND EASY
HARDWIRED INSTALLATION



bronze



PRODUCT SIZE

12", 18", 24", 32",
40", 48"



AVAILABLE
POWER

5W-24W



COLOR
SELECTABLE

2700K-5000K



LED UNDER CABINET LINEAR

ASD-UCL



POWER CORD 72"



LINKING CORD 6"



END-TO-END CONNECTOR



HI/LO SWITCH PROVIDES 100% AND 50% BRIGHTNESS LEVELS



3 COLOR TEMPERATURE OPTIONS



CRI90+ RICH AND NATURAL COLORS



QUICK AND EASY HARDWARE AND PLUG-IN INSTALLATION



PRODUCT SIZE

12", 18", 24", 32", 40", 48"



AVAILABLE POWER

5W-24W



COLOR SELECTABLE

2700K-4000K



LED UNDER CABINET SWIVEL

ASD-UCS



POWER CORD 72"



LINKING CORD 6"



END-TO-END CONNECTOR



SWIVEL LENS WITH 50° TILT FOR DIRECTIONAL LIGHT CONTROL



CRI90+ RICH AND NATURAL COLORS



3 COLOR TEMPERATURE OPTIONS



QUICK AND EASY HARDWARE AND PLUG-IN INSTALLATION

white

bronze



PRODUCT SIZE

12", 18", 24", 32", 40", 48"



AVAILABLE POWER

5W-24W



COLOR SELECTABLE

2700K-4000K



LED STEP LIGHT HORIZONTAL

ASD-LSTL



LOW-PROFILE DESIGN
WITH NO VISIBLE HARDWARE



3 COLOR TEMPERATURE
OPTIONS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



WATERPROOF
FOR ALL WEATHER CONDITIONS



AVAILABLE
POWER
3W



COLOR
SELECTABLE
3000K-5000K



BUILT-IN
PHOTOCELL
ASD-LSTL-PC



BUILT-IN
DUSK TO DAWN PHOTOCELL



AUTOMATICALLY SWITCHES ON/OFF
DEPENDING ON THE TIME OF DAY



BUILT-IN
MOTION SENSOR
ASD-LSTL-MS



BUILT-IN PIR
MOTION SENSOR



DETECTION RANGE
UP TO 13ft



BUILT-IN PHOTOCELL
& MOTION SENSOR
ASD-LSTL-PC-MS



BUILT-IN
DUSK TO DAWN PHOTOCELL



BUILT-IN PIR
MOTION SENSOR



AUTOMATICALLY SWITCHES ON/OFF
DEPENDING ON THE TIME OF DAY



RGBW LIGHTING
MODELS
ASD-STLA-RGBW



RGBW DESIGN
WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



COMPATIBLE WITH ALEXA
AND GOOGLE ASSISTANT



LED HARDSCAPE LIGHT SWIVEL

ASD-HSLS

LED HARDSCAPE LIGHT SWIVEL WITH RGBW

ASD-HSLS-RGBW



12V
LOW-VOLTAGE DESIGN



5 COLOR TEMPERATURE
OPTIONS



SWIVEL LIGHT HEAD
WITH 90 DEGREE TILT



CUTTABLE
MOUNTING PLATE



RGBW DESIGN
WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



SWIVEL LIGHT HEAD
WITH 90 DEGREE TILT



CUTTABLE
MOUNTING PLATE



PRODUCT
SIZE
4", 7", 12"



AVAILABLE
POWER
2W, 4.5W, 5W



COLOR
SELECTABLE
2200K-5000K



PRODUCT
SIZE
4", 7", 12"



AVAILABLE
POWER
1.5W, 3W, 5W



COLOR
CHANGING
2700K-6500K-RGBW



LED OUTDOOR WALL SCONCE

ASD-OLWS-21



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



UV RESISTANT PMMA LENS WITH EVEN LIGHT DISTRIBUTION



3 COLOR TEMPERATURE OPTIONS



WATERPROOF FOR ALL WEATHER CONDITIONS



nickel



bronze



black



120-277V voltage



PRODUCT SIZE

10", 18", 24", 36"



AVAILABLE POWER

15W-30W



COLOR SELECTABLE

3000K-5000K



BUILT-IN PHOTOCELL
ASD-OLWS-21-PC



BUILT-IN DUSK TO DAWN PHOTOCELL



LIGHT LEVEL TO TURN ON 10-60 LUX, TO TURN OFF 300 LUX



OPERATING TIME 60 SECOND



DETECTION RANGE MIN 27ft x 120+0/20°



BUILT-IN MOTION SENSOR
ASD-OLWS-21-MS



BUILT-IN INFRARED MOTION SENSOR



LIGHT LEVEL TO TURN ON 30-150LUX, TO TURN OFF 200-800LUX



DETECTION RANGE UP TO 26ft



INSTALLATION HEIGHT 3-6ft



WALL SCONCE WITH GRID
ASD-OLWS-21GR



GRID DESIGN



UV RESISTANT PMMA LENS WITH GRID



PRODUCT SIZE 24", 36"



LED OUTDOOR WALL SCONCE WITH RGBW

ASD-OLWS-21-RGBW



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



RGBW DESIGN
WITH 16.7 MILLION COLORS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



UV RESISTANT PMMA LENS
WITH EVEN LIGHT DISTRIBUTION



3 COLOR TEMPERATURE
OPTIONS



WATERPROOF
FOR ALL WEATHER CONDITIONS

LED OUTDOOR WALL SCONCE

ASD-OLWS-22



PRODUCT
SIZE

10", 24"



AVAILABLE
POWER

15W, 23W



COLOR
CHANGING

2700K-6500K-RGBW



PRODUCT
SIZE

12", 18", 24", 36"



AVAILABLE
POWER

15W-28W



COLOR
SELECTABLE

3000K-5000K



LED OUTDOOR WALL SCONCE

ASD-OLWS-23



 **BUILT-IN PHOTOCELL**

 BUILT-IN DUSK TO DAWN PHOTOCELL

 AUTOMATICALLY SWITCHES ON/OFF DEPENDING ON THE TIME OF DAY



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



UV RESISTANT PMMA LENS WITH EVEN LIGHT DISTRIBUTION



3 COLOR TEMPERATURE OPTIONS



WATERPROOF FOR ALL WEATHER CONDITIONS



PRODUCT SIZE

8", 14"



AVAILABLE POWER

12W, 20W



COLOR SELECTABLE

3000K-5000K



LED OUTDOOR WALL SCONCE WITH RGBW


ASD-OLWS23-RGBW



CONTROLLED BY SMART APP ON YOUR SMARTPHONE



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



RGBW DESIGN WITH 16.7 MILLION COLORS



PRODUCT SIZE

14"



AVAILABLE POWER

20W



COLOR CHANGING

2700K-6500K-RGBW



LED OUTDOOR WALL SCONCE

ASD-LWS26S



-  **BUILT-IN PHOTOCELL**
-  **BUILT-IN DUSK TO DAWN PHOTOCELL**
-  **AUTOMATICALLY SWITCHES ON/OFF DEPENDING ON THE TIME OF DAY**



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



3 COLOR TEMPERATURE OPTIONS

white



CLEAR SEEDED GLASS FOR LUXURIOUS GLOW



WATERPROOF FOR ALL WEATHER CONDITIONS

black



PRODUCT SIZE

13", 18", 24"



AVAILABLE POWER

11.5W, 20W



COLOR SELECTABLE

3000K-5000K



LED OUTDOOR WALL SCONCE WITH RGBW

ASD-LWS26-RGBW



RGBW DESIGN WITH RED, GREEN, BLUE, WHITE COLORS



COLOR IS CONTROLLED BY A SIMPLE SWITCH ON THE BOTTOM OF THE FIXTURE



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



CLEAR SEEDED GLASS FOR LUXURIOUS GLOW



PRODUCT SIZE

13", 18"



AVAILABLE POWER

8.5W



COLOR SELECTABLE

3000K-5000K-RGBW



LED OUTDOOR WALL SCONCE

ASD-LWS28S



MULTIDIRECTIONAL ILLUMINATION



CLEAR SEEDED GLASS FOR LUXURIOUS GLOW



3 COLOR TEMPERATURE OPTIONS



WATERPROOF FOR ALL WEATHER CONDITIONS



BACK-LIGHT DESIGN



3 COLOR TEMPERATURE OPTIONS



OPERATES ON 120-277V



CAN BE INSTALLED ON 2.75" OR 3.5" J-BOX

LED OUTDOOR WALL SCONCE WITH BACKLIGHT

ASD-LWS27B

UP TO 6ft

3-1/8"



PRODUCT SIZE

12", 18", 24"




AVAILABLE POWER

22W



COLOR SELECTABLE

3000K-5000K



PRODUCT SIZE

18", 24", 36", 48", 72"



AVAILABLE POWER

18W-40W



COLOR SELECTABLE

3000K-5000K



LED OUTDOOR WALL SCONCE WIDE ACRYLIC

ASD-LWS27A



UP TO 6ft



LED OUTDOOR WALL SCONCE WIDE ACRYLIC WITH RGBW

ASD-LWS27A-RGBW



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



OPERATES ON 120-277V



3 COLOR TEMPERATURE OPTIONS



CAN BE INSTALLED ON 2.75" OR 3.5" J-BOX



CONTROLLED BY SMART APP ON YOUR SMARTPHONE



WATERPROOF FOR ALL WEATHER CONDITIONS



RGBW DESIGN WITH 16.7 MILLION COLORS



PRODUCT SIZE
18", 24", 36", 48", 72"



AVAILABLE POWER
18W-40W



COLOR SELECTABLE
3000K-5000K



PRODUCT SIZE
18", 24", 48"



AVAILABLE POWER
12W, 18W, 36W



COLOR CHANGING
2700K-6500K-RGBW



LED OUTDOOR WALL SCONCE NARROW DESIGN

ASD-LWS27N



3-1/8"



UP TO 6ft



NARROW DESIGN



3 COLOR TEMPERATURE
OPTIONS



OPERATES ON 120-277V



CAN BE INSTALLED
ON 2.75" OR 3.5" J-BOX

LED OUTDOOR WALL SCONCE NARROW DESIGN WITH RGBW

ASD-LWS27N-RGBW



3-1/8"


3-1/8"



NARROW DESIGN



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



RGBW DESIGN
WITH 16.7 MILLION COLORS



works with alexa



**PRODUCT
SIZE**
18", 24", 36", 48", 72"



**AVAILABLE
POWER**
18W-40W



**COLOR
SELECTABLE**
3000K-5000K



**PRODUCT
SIZE**
24", 48"



**AVAILABLE
POWER**
18W, 36W



**COLOR
CHANGING**
2700K-6500K-RGBW



LED OUTDOOR WALL SCONCE WITH CENTER LIGHT

ASD-LWS27C



5-7/8"

UP TO 6ft



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



OPERATES ON 120-277V



3 COLOR TEMPERATURE
OPTIONS



CAN BE INSTALLED
ON 2.75" OR 3.5" J-BOX

LED OUTDOOR WALL SCONCE WITH CENTER LIGHT & RGBW

ASD-LWS27C-RGBW



5-7/8"



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



WATERPROOF
FOR ALL WEATHER CONDITIONS



RGBW DESIGN
WITH 16.7 MILLION COLORS



**PRODUCT
SIZE**
18", 24", 36", 48", 72"



**AVAILABLE
POWER**
18W-40W



**COLOR
SELECTABLE**
3000K-5000K



**PRODUCT
SIZE**
24", 48"



**AVAILABLE
POWER**
20W, 24W



**COLOR
CHANGING**
2700K-6500K-RGBW



LED OUTDOOR WALL CYLINDER

ASD-LCL



EFFECTIVE UP AND DOWN
ILLUMINATION



3 COLOR TEMPERATURE
OPTIONS



DURABLE HOUSING RESISTANT
TO RUST AND IMPACT



WATERPROOF
FOR ALL WEATHER CONDITIONS



**LIGHT
DIRECTION**
1 side, 2 sides



**AVAILABLE
POWER**
9W, 18W



**COLOR
SELECTABLE**
3000K-5000K



**BUILT-IN
PHOTOCELL**
ASD-LCLR-A, ASD-LCLS-A



BUILT-IN
DUSK TO DAWN PHOTOCELL



AUTOMATICALLY SWITCHES ON/OFF
DEPENDING ON THE TIME OF DAY



**RGBW LIGHTING
MODELS**
ASD-LCLR2-RGBW



RGBW DESIGN
WITH 16.7 MILLION COLORS



CONTROLLED BY SMART APP
ON YOUR SMARTPHONE



COMPATIBLE WITH ALEXA
AND GOOGLE ASSISTANT



**WALL CYLINDER WITH
DECORATIVE RINGS**
ASD-LCLR-B, ASD-LCLS-B



1 OR 2 ACRYLIC
DECORATIVE RINGS



WITH SIDE-LIGHT
EFFECT



BULB OUTDOOR WALL CYLINDER

ASD-OCL



**BUILT-IN PHOTOCELL**

**BUILT-IN DUSK TO DAWN PHOTOCELL**

**AUTOMATICALLY SWITCHES ON/OFF DEPENDING ON THE TIME OF DAY**



EFFECTIVE UP AND DOWN ILLUMINATION



STANDARD E26 BASE

white



DURABLE HOUSING RESISTANT TO RUST AND IMPACT



WATERPROOF FOR ALL WEATHER CONDITIONS

black



LIGHT DIRECTION

1 side, 2 sides




BULB TYPE

A19

BULB OUTDOOR BOLLARD WITH DECORATIVE RING

ASD-BLC

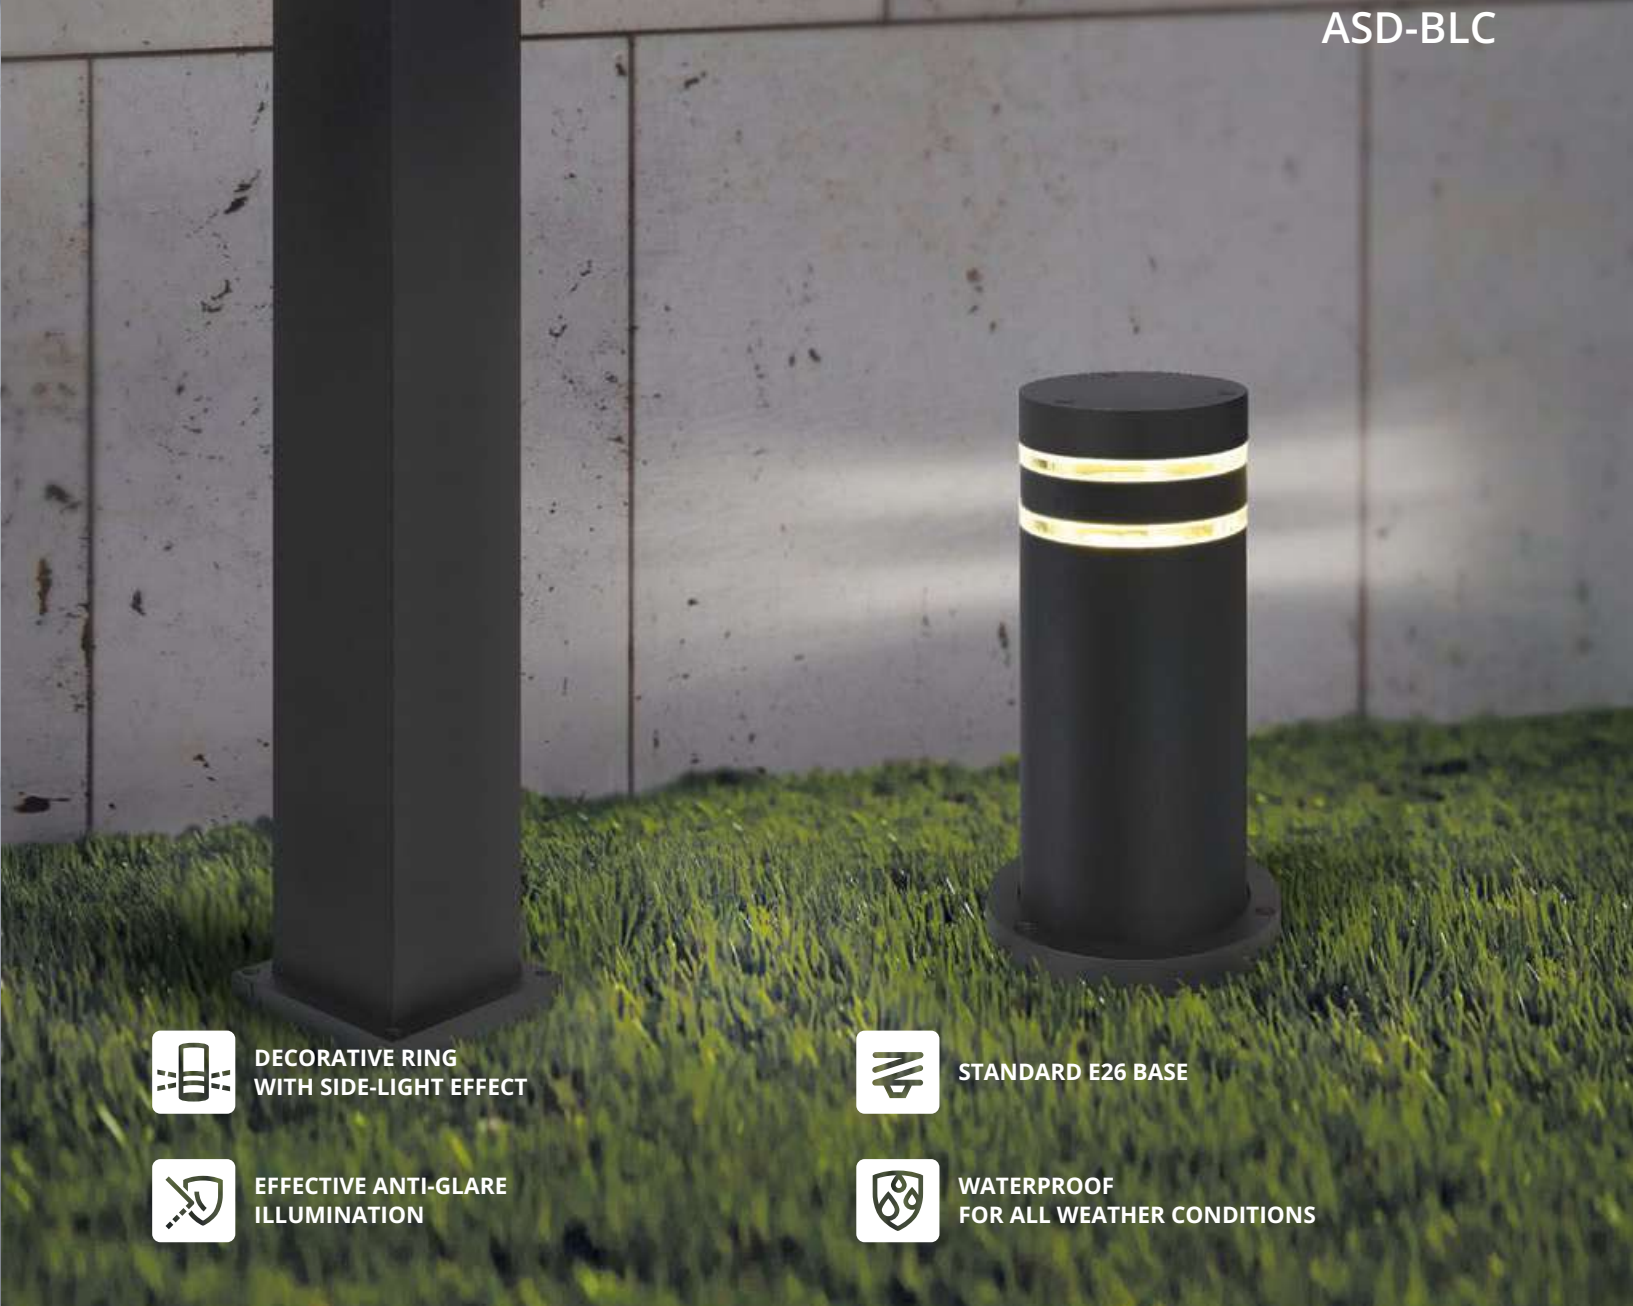

DECORATIVE RING WITH SIDE-LIGHT EFFECT



STANDARD E26 BASE



EFFECTIVE ANTI-GLARE ILLUMINATION



WATERPROOF FOR ALL WEATHER CONDITIONS



PRODUCT SIZE

12", 24"



BULB TYPE

A19



LED LINEAR HIGH BAY WITH Q-BASE STANDADR series

■ ASD-WHB5B

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WHB5B-100A50	14"	60/80/100	120-277	0-10V	5,000	15,386	14-15/16" x 9-13/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-160A50	14"	100/130/160	120-277	0-10V	5,000	24,842	14-15/16" x 9-13/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-220A50	18"	130/160/220	120-277	0-10V	5,000	35,342	17-11/16" x 12-7/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-320A50	20"	160/220/320	120-277	0-10V	5,000	50,848	20-1/2" x 14-7/16" x 3-1/4"	1	UL / DLC PRM
ASD-WHB5B-500A50	35"	320/400/500	120-277	0-10V	5,000	75,905	35-1/2" x 12-7/16" x 2-15/16"	1	UL / DLC PRM

WITH 10ft CORD

ASD-WHB5B-160A50-CP	14"	100/130/160	120-277	0-10V	5,000	24,842	14-15/16" x 9-13/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-220A50-CP	18"	130/160/220	120-277	0-10V	5,000	35,342	17-11/16" x 12-7/16" x 2-15/16"	1	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft White	ASD-09IR-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft White	ASD-09IR50-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft White	ASD-09MW-WH	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft White	ASD-09IR-NLS-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft White	ASD-09MW-NLS-WH	2-1/8" x 2-1/8" x 1-3/8"	120	UL
Remote Control for Motion Sensor	ASD-06RC	5-11/16" x 1-3/4" x 13/16"	60	-
Battery back-up kit 20W 120-277V	ASD-EMK20W-WHB5B	9-5/8" x 4-5/8" x 1-7/8"	10	-
Battery back-up kit 30W 120-277V	ASD-EMK30W-WHB5A	9-5/8" x 4-5/8" x 1-7/8"	10	-
Pendant Mounting Bracket for 100-220W	ASD-PMB1-WHB5	4" x 3-11/16" x 3-1/8"	50	-
Surface Mounting Bracket for	ASD-SMB1-WHB5	4" x 3-11/16" x 3-1/16"	50	-
60" Clear Lens for 220W	ASD-L60-220-WHB5B	17-9/16" x 3-7/8" x 3/8"	20	-
60" Clear Lens for 320W	ASD-L60-320-WHB5B	20-5/16" x 4-13/16" x 3/8"	20	-

LED LINEAR HIGH BAY WITH Q-BASE PRO series

■ ASD-WHB5B-PRO

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WHB5B-PRO-100	14"	60/80/100	120-277	0-10V	3,500/4,000/5,000	16,366	14-15/16" x 9-13/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-PRO-160	14"	100/130/160	120-277	0-10V	3,500/4,000/5,000	25,522	14-15/16" x 9-13/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-PRO-220	18"	130/160/220	120-277	0-10V	3,500/4,000/5,000	36,274	17-11/16" x 12-7/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5B-PRO-320	20"	160/220/320	120-277	0-10V	3,500/4,000/5,000	52,194	20-1/2" x 14-7/16" x 3-1/4"	1	UL / DLC PRM
ASD-WHB5B-PRO-500	35"	320/400/500	120-277	0-10V	3,500/4,000/5,000	76,668	35-1/2" x 12-7/16" x 2-15/16"	1	UL / DLC PRM

HIGH VOLTAGE

ASD-WHB5BHV-PRO-220	18"	130/160/220	277-480	0-10V	3,500/4,000/5,000	36,031	17-11/16" x 12-7/16" x 2-15/16"	1	UL / DLC PRM
ASD-WHB5BHV-PRO-320	20"	160/220/320	277-480	0-10V	3,500/4,000/5,000	51,322	20-1/2" x 14-7/16" x 3-1/4"	1	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-WHB5B-PRO-160-40EM	14"	100/130/160	120-277	0-10V	3,500/4,000/5,000	25,522	14-15/16" x 9-13/16" x 5-9/16"	1	UL / DLC PRM
ASD-WHB5B-PRO-220-40EM	18"	130/160/220	120-277	0-10V	3,500/4,000/5,000	36,274	17-11/16" x 12-7/16" x 5-9/16"	1	UL / DLC PRM
ASD-WHB5B-PRO-320-40EM	20"	160/220/320	120-277	0-10V	3,500/4,000/5,000	52,194	20-1/2" x 14-7/16" x 5-7/8"	1	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft White	ASD-09IR-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft White	ASD-09IR50-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft White	ASD-09MW-WH	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft White	ASD-09IR-NLS-WH	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft White	ASD-09MW-NLS-WH	2-1/8" x 2-1/8" x 1-3/8"	120	UL
Remote Control for Motion Sensor	ASD-06RC	5-11/16" x 1-3/4" x 13/16"	60	-
Battery back-up kit 20W 120-277V	ASD-EMK20W-WHB5B	9-5/8" x 4-5/8" x 1-7/8"	10	-
Battery back-up kit 30W 120-277V	ASD-EMK30W-WHB5A	9-5/8" x 4-5/8" x 1-7/8"	10	-
Pendant Mounting Bracket for 100-220W	ASD-PMB1-WHB5	4" x 3-11/16" x 3-1/8"	50	-
Surface Mounting Bracket for	ASD-SMB1-WHB5	4" x 3-11/16" x 3-1/16"	50	-
60" Clear Lens for 220W	ASD-L60-220-WHB5B	17-9/16" x 3-7/8" x 3/8"	20	-
60" Clear Lens for 320W	ASD-L60-320-WHB5B	20-5/16" x 4-13/16" x 3/8"	20	-



LED UFO HIGH BAY WITH Q-BASE STANDADR series

■ ASD-UHB2A

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UHB2A-150A50-BK	100/120/150	120-277	0-10V	5,000	23,013	Black	11" x 11" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-200A50-WH	100/150/200	120-277	0-10V	5,000	30,978	White	11" x 11" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-200A50-BK	100/150/200	120-277	0-10V	5,000	30,978	Black	11" x 11" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-240A50-BK	150/200/240	120-277	0-10V	5,000	37,120	Black	12-5/8" x 12-5/8" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-300A50-BK	200/240/300	120-277	0-10V	5,000	45,148	Black	12-5/8" x 12-5/8" x 7-15/16"	1	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft	ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft	ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft	ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft	ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-3/8"	120	UL
Remote Control for Motion Sensor	ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-
NLS Battery Back-up kit 40W 120-277V	ASD-EMB40-NLS	-	8-3/8" x 5-3/16" x 4-13/16"	6	UL
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and EM Battery	ASD-G02-NLS	-	4-1/4" x 5-3/16" x 1-1/16"	4	-
Battery Back-up kit 40W 120-277V	BLD-RM40R	-	15-11/16" x 15-11/16" x 5-9/16"	4	UL
Battery Back-up kit 40W 120-277V	ASD-EMB40	-	8-3/8" x 5-3/16" x 4-13/16"	6	UL
Battery Back-up kit 60W 120-277V	BLD-RM60R	-	15-11/16" x 5-3/4" x 5-3/4"	4	UL
Battery Back-up kit 60W 120-277V	ASD-EMB60	-	8-3/8" x 5-3/16" x 4-13/16"	6	UL
Battery Back-up kit 60W 277-480V	BLD-GM60R-HV	-	14-1/2" x 3-1/16" x 1-7/8"	5	UL
Remote Control for Battery Back-up kit	RN1	-	5-1/8" x 1-1/4" x 5/8"	50	-
Spring Hook M10 for 100-240W	ASD-H-M10	Metallic	3-5/16" x 2-1/16" x 7/8"	50	UL
Spring Hook M10 for 300W	ASD-H-M12	Metallic	3-1/2" x 2-5/16" x 1"	50	UL
Screw-bolt Hook M10 for 100-240W	ASD-HS-M10	Black	3-7/8" x 1-5/8" x 1-5/16"	50	UL
Pendant Mount Bracket	ASD-PMB-UHB	Black	2-3/8" x 1-9/16" x 2-13/16"	50	-
Pendant Mount Bracket with J-box and Spring Hook	ASD-PMBJB-UHB	Black	4-3/4" x 5-1/16" x 7-3/16"	40	-
Surface Mount Bracket for 150-300W	ASD-SMB-UHB2A-BK	Black	10-5/8" x 10-5/8" x 8-1/4"	20	-
Surface Mount Bracket for 150-300W	ASD-SMB-UHB2A-WH	White	10-5/8" x 10-5/8" x 8-1/4"	20	-
Clear Lens 60" for 150-200W	ASD-L60A-UHB2A	Clear	9-15/16" x 9-15/16" x 9/16"	20	-
Clear Lens 60" for 240-300W	ASD-L60B-UHB2A	Clear	11-5/16" x 11-5/16" x 1/2"	20	-
Safety Cable 2.6ft long 110 lbs max-weight for 100-500W	ASD-SC-110	-	-	500	-



LED UFO HIGH BAY WITH Q-BASE PRO series

■ ASD-UHB2A-PRO

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UHB2A-PRO-150-BK	100/120/150	120-277	0-10V	3,000/4,000/5,000	22,951	11" x 11" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-PRO-200-BK	100/150/200	120-277	0-10V	3,000/4,000/5,000	29,648	11" x 11" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-PRO-240-BK	150/200/240	120-277	0-10V	3,000/4,000/5,000	36,861	12-5/8" x 12-5/8" x 6-3/4"	1	UL / DLC PRM
ASD-UHB2A-PRO-300-BK	200/240/300	120-277	0-10V	3,000/4,000/5,000	44,273	12-5/8" x 12-5/8" x 7-15/16"	1	UL / DLC PRM
ASD-UHB2A-PRO-500-BK	300/400/500	120-277	0-10V	3,000/4,000/5,000	76,843	14-9/16" x 14-9/16" x 10-1/16"	1	UL / DLC PRM

HIGH VOLTAGE

ASD-UHB2AHV-PRO-150-BK	100/120/150	277-480	0-10V	3,000/4,000/5,000	22,951	11" x 11" x 6-7/8"	1	UL / DLC PRM
ASD-UHB2AHV-PRO-200-BK	100/150/200	277-480	0-10V	3,000/4,000/5,000	29,648	11" x 11" x 6-7/8"	1	UL / DLC PRM
ASD-UHB2AHV-PRO-240-BK	150/200/240	277-480	0-10V	3,000/4,000/5,000	36,861	12-5/8" x 12-5/8" x 6-7/8"	1	UL / DLC PRM
ASD-UHB2AHV-PRO-300-BK	200/240/300	277-480	0-10V	3,000/4,000/5,000	44,273	12-5/8" x 12-5/8" x 7-3/8"	1	UL / DLC PRM
ASD-UHB2AHV-PRO-500-BK	300/400/500	277-480	0-10V	3,000/4,000/5,000	76,843	14-9/16" x 14-9/16" x 10-1/16"	1	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft		ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft		ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft		ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft		ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft		ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft		ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft		ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-3/8"	120	UL
Remote Control for Motion Sensor		ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-
NLS Battery Back-up kit 40W 120-277V		ASD-EMB40-NLS		8-3/8" x 5-3/16" x 4-13/16"	6	UL
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and EM Battery		ASD-G02-NLS	-	4-1/4" x 5-3/16" x 1-1/16"	4	-
Battery Back-up kit 40W 120-277V		BLD-RM40R	-	15-11/16" x 15-11/16" x 5-9/16"	4	UL
Battery Back-up kit 40W 120-277V		ASD-EMB40	-	8-3/8" x 5-3/16" x 4-13/16"	6	UL
Battery Back-up kit 60W 120-277V		BLD-RM60R	-	15-11/16" x 5-3/4" x 5-3/4"	4	UL
Battery Back-up kit 60W 120-277V		ASD-EMB60	-	8-3/8" x 5-3/16" x 4-13/16"	6	UL
Battery Back-up kit 60W 277-480V		BLD-GM60R-HV	-	14-1/2" x 3-1/16" x 1-7/8"	5	UL
Remote Control for Battery Back-up kit		RN1	-	5-1/8" x 1-1/4" x 5/8"	50	-
Spring Hook M10 for 100-240W		ASD-H-M10	Metallic	3-5/16" x 2-1/16" x 7/8"	50	UL
Spring Hook M10 for 300W		ASD-H-M12	Metallic	3-1/2" x 2-5/16" x 1"	50	UL
Screw-bolt Hook M10 for 100-240W		ASD-HS-M10	Black	3-7/8" x 1-5/8" x 1-5/16"	50	UL
Pendant Mount Bracket		ASD-PMB-UHB	Black	2-3/8" x 1-9/16" x 2-13/16"	50	-
Pendant Mount Bracket with J-box and Spring Hook		ASD-PMBJB-UHB	Black	4-3/4" x 5-1/16" x 7-3/16"	40	-
Surface Mount Bracket for 150-300W		ASD-SMB-UHB2A-BK	Black	10-5/8" x 10-5/8" x 8-1/4"	20	-
Surface Mount Bracket for 150-300W		ASD-SMB-UHB2A-WH	White	10-5/8" x 10-5/8" x 8-1/4"	20	-
Clear Lens 60" for 150-200W		ASD-L60A-UHB2A	Clear	9-15/16" x 9-15/16" x 9/16"	20	-
Clear Lens 60" for 240-300W		ASD-L60B-UHB2A	Clear	11-5/16" x 11-5/16" x 1/2"	20	-
Safety Cable 2.6ft long 110 lbs max-weight for 100-500W		ASD-SC-110	-	-	500	-

NSF LED UFO HIGH BAY WITH Q-BASE

■ ASD-UFS-PRO

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UFS-PRO-200	100/150/200	120-277	0-10V	3,000/4,000/5,000	31,503	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM
ASD-UFS-PRO-300	200/240/300	120-277	0-10V	3,000/4,000/5,000	45,444	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM

WITH Q-BASE

ASD-UFS-PRO-200-QB	100/150/200	120-277	0-10V	3,000/4,000/5,000	31,503	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM
ASD-UFS-PRO-300-QB	200/240/300	120-277	0-10V	3,000/4,000/5,000	45,444	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM

HIGH VOLTAGE WITH Q-BASE

ASD-UFSHV-PRO-200-QB	100/150/200	200-480	0-10V	3,000/4,000/5,000	32,601	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM
ASD-UFSHV-PRO-300-QB	200/240/300	200-480	0-10V	3,000/4,000/5,000	48,323	16-15/16" x 16-15/16" x 5-5/8"	1	NSF / UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft White		ASD-09IR-WH		2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft White		ASD-09IR50-WH		2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft White		ASD-09MW-WH		2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft White		ASD-09IR-NLS-WH		2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft White		ASD-09MW-NLS-WH		2-1/8" x 2-1/8" x 1-3/8"	120	UL
Remote Control for Motion Sensor		ASD-06RC		5-11/16" x 1-3/4" x 13/16"	60	-



LED WRAP FIXTURE

■ ASD-WRL

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WRL-4A48AC	4ft	32/40/48	120-277	0-10V	3,500/4,000/5,000	5,583	47-5/8" x 5-5/16" x 2-1/8"	4	UL / DLC STD

WITH BATTERY BACK-UP

ASD-WRL-4A48AC-8EM	4ft	32/40/48	120-277	0-10V	3,500/4,000/5,000	5,583	47-5/8" x 5-5/16" x 2-1/8"	4	UL / DLC STD
--------------------	-----	----------	---------	-------	-------------------	-------	----------------------------	---	--------------

LED WRAP FIXTURE

■ ASD-WRL2

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WRL2-4A45AC	4ft	34/38/45	120-277	0-10V	3,500/4,000/5,000	6,312	46" x 9-3/4" x 3-7/16"	1	UL / DLC STD

LED SEAMLESS VAPOR PROOF FIXTURE

■ ASD-LVP2SM

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LVP2SM-2A28AC	2ft	16/24/28	120-277	0-10V	3,500/4,000/5,000	3,019	23-9/16" x 3-9/16" x 3-3/16"	9	UL / DLC STD
ASD-LVP2SM-4A56AC	4ft	32/48/56	120-277	0-10V	3,500/4,000/5,000	7,253	48-1/8" x 3-9/16" x 3-1/8"	9	UL / DLC STD
ASD-LVP2SM-8A120AC	8ft	64/96/120	120-277	0-10V	3,500/4,000/5,000	17,359	94-3/4" x 3-9/16" x 3-1/8"	6	UL / DLC STD

WITH BATTERY BACK-UP

ASD-LVP2SM-4A56AC-10EM	4ft	32/48/56	120-277	0-10V	3,500/4,000/5,000	7,140	48-1/8" x 3-9/16" x 3-1/8"	9	UL / DLC STD
ASD-LVP2SM-8A120AC-20EM	8ft	64/96/120	120-277	0-10V	3,500/4,000/5,000	17,325	94-3/4" x 3-9/16" x 3-1/8"	6	UL / DLC STD

WITH MOTION SENSOR

ASD-LVP2SM-4A56AC-MS	4ft	32/48/56	120-277	0-10V	3,500/4,000/5,000	6,330	47-3/16" x 3-9/16" x 3-3/16"	9	UL / DLC STD
Remote Control for Motion Sensor ASD-06RC							5-11/16" x 1-3/4" x 13/16"	60	-

LED STRIPLIGHT FIXTURE

■ ASD-LSF5

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSF5-2A28AC-PRM	2 ft	20/24/28	120-277	0-10 V	3,500/4,000/5,000	3,890	26-3/16" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-4A44AC-PRM	4 ft	22/28/36/44	120-277	0-10 V	3,500/4,000/5,000	5,853	46-5/8" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-8A90AC-PRM	8 ft	48/68/90	120-277	0-10 V	3,500/4,000/5,000	12,523	92-13/16" x 2-5/8" x 2-11/16"	4	UL / DLC STD

WITH BATTERY BACK-UP

ASD-LSF5-2A28AC-4EM-PRM	2 ft	20/24/28	120-277	0-10 V	3,500/4,000/5,000	3,890	26-3/16" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-4A44AC-12EM-PRM	4 ft	22/28/36/44	120-277	0-10 V	3,500/4,000/5,000	5,853	46-5/8" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-8A90AC-EM-PRM	8 ft	48/68/90	120-277	0-10 V	3,500/4,000/5,000	12,523	92-13/16" x 2-5/8" x 2-11/16"	4	UL / DLC STD

STAIRWELL WITH MOTION SENSOR

ASD-LSF5-2A28AC-MS-SW	2 ft	20/24/28	120-277	0-10 V	3,500/4,000/5,000	3,890	26-3/16" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-4A44AC-MS-SW	4 ft	22/28/36/44	120-277	0-10 V	3,500/4,000/5,000	5,853	46-5/8" x 2-5/8" x 2-11/16"	8	UL / DLC STD
ASD-LSF5-8A90AC-MS-PRM	8 ft	48/68/90	120-277	0-10 V	3,500/4,000/5,000	12,523	92-13/16" x 2-5/8" x 2-11/16"	4	UL / DLC STD

Remote Control for Motion Sensor ASD-RC-RC100							4-13/16" x 2-3/4" x 13/16"	50	
---	--	--	--	--	--	--	----------------------------	----	--

STAIRWELL WITH MOTION SENSOR AND BATTERY BACK-UP

ASD-LSF5-4A44AC-12EM-MS-SW	4 ft	22/28/36/44	120-277	0-10 V	3,500/4,000/5,000	5,853	46-5/8" x 2-5/8" x 2-11/16"	8	UL / DLC STD
Remote Control for Motion Sensor ASD-RC-RC100							4-13/16" x 2-3/4" x 13/16"	50	

ACCESSORIES

Connection bracket					ASD-CB-LSF5		5 1/4" x 2 3/4" x 1 1/16"	100	
Wire Guard for 4 feet					ASD-WG4-LSF5		46-13/16" x 3-1/4" x 2-3/8"	8	



LED STRIPLIGHT FIXTURE

■ ASD-LSF8

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSF8-2A25WH	2ft	15/20/25	120-277	0-10V	3,500/4,000/5,000	3,249	White	24" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-4A40WH	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,866	White	47-1/4" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-4A40BK	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,866	Black	47-1/4" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-8A80WH	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,848	White	94-1/2" x 2-11/16" x 3-1/8"	6	UL / DLC STD
ASD-LSF8-8A80BK	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,848	Black	94-1/2" x 2-11/16" x 3-1/8"	6	UL / DLC STD

HIGH VOLTAGE

ASD-LSF8HY-4A40WH	4ft	20/30/40	200-480	0-10V	3,000/4,000/5,000	5,866	White	47-1/4" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8HY-8A80WH	8ft	55/75/80	200-480	0-10V	3,000/4,000/5,000	11,848	White	94-1/2" x 2-11/16" x 3-1/8"	6	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-LSF8-2A25WH-8EM	2ft	15/20/25	120-277	0-10V	3,500/4,000/5,000	3,249	White	24" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-4A40WH-10EM	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,866	White	47-1/4" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-4A40BK-10EM	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,866	Black	47-1/4" x 2-11/16" x 3-1/8"	9	UL / DLC PRM
ASD-LSF8-8A80WH-15EM	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,848	White	94-1/2" x 2-11/16" x 3-1/8"	6	UL / DLC STD
ASD-LSF8-8A80BK-15EM	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,848	Black	94-1/2" x 2-11/16" x 3-1/8"	6	UL / DLC STD

ACCESSORIES

Connection bracket					ASD-CB-LSF8-BK	Black	2-3/16" x 2-3/16" x 1/16"	100	-
Connection bracket					ASD-CB-LSF8-WH	White	2-3/16" x 2-3/16" x 1/16"	100	-



LED STRIPLIGHT FIXTURE WITH Q-BASE

■ ASD-LSF8-QB


Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSF8-2A25WH-QB	2ft	15/20/25	120-277	0-10V	3,500/4,000/5,000	3,263	White	24" x 2-11/16" x 3-1/4"	9	UL / DLC PRM
ASD-LSF8-4A40WH-QB	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,395	White	47-1/4" x 2-11/16" x 3-1/4"	9	UL / DLC PRM
ASD-LSF8-8A80WH-QB	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,386	White	94-1/2" x 2-11/16" x 3-1/4"	6	UL / DLC STD

WITH BATTERY BACK-UP

ASD-LSF8-2A25WH-QB-8EM	2ft	15/20/25	120-277	0-10V	3,500/4,000/5,000	3,263	White	24" x 2-11/16" x 3-1/4"	9	UL / DLC PRM
ASD-LSF8-4A40WH-QB-10EM	4ft	20/30/40	120-277	0-10V	3,500/4,000/5,000	5,395	White	47-1/4" x 2-11/16" x 3-1/4"	9	UL / DLC PRM
ASD-LSF8-8A80WH-QB-15EM	8ft	55/75/80	120-277	0-10V	3,500/4,000/5,000	11,386	White	94-1/2" x 2-11/16" x 3-1/4"	6	UL / DLC STD

ACCESSORIES

Infrared Motion Sensor clip-in base 13ft					ASD-M22IR-WH	White	1-7/8" x 1-3/16" x 1-3/16"	200	UL
NLS Infrared Motion Sensor clip-in base 13ft					ASD-M22IR-NLS-WH	White	1-7/8" x 1-3/16" x 1-3/16"	200	UL
Remote Control for Motion Sensor					ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-
Connection bracket					ASD-CB-LSF8-WH	White	2-3/16" x 2-3/16" x 1/16"	100	-

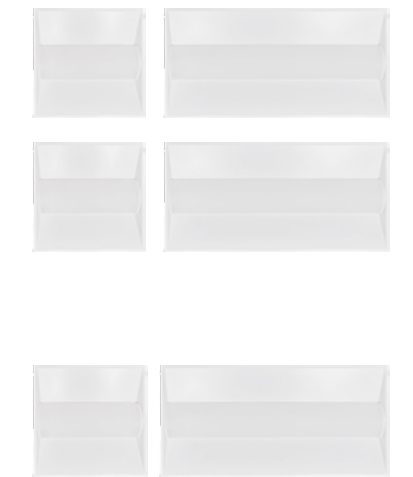

LED TROFFER LIGHTS

■ ASD-LTR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LTR-22A30-2P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,909	23-3/4" x 23-3/4" x 2-1/8"	1	UL / DLC STD
ASD-LTR-24A45-2P	2x4	34/38/45	120-277	0-10V	3,500/4,000/5,000	6,028	47-3/4" x 23-3/4" x 2-1/8"	1	UL / DLC STD

WITH BATTERY BACK-UP

ASD-LTR-22A30-EM-2P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,909	23-3/4" x 23-3/4" x 2-1/8"	1	UL / DLC STD
ASD-LTR-24A45-EM-2P	2x4	34/38/45	120-277	0-10V	3,500/4,000/5,000	6,028	47-3/4" x 23-3/4" x 2-1/8"	1	UL / DLC STD

LED TROFFER KIT

■ ASD-LTRK

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LTRK-22A30-2P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,884	23-7/8" x 23-7/8" x 3-1/8"	1	UL / DLC STD
ASD-LTRK-24A45-2P	2x4	34/38/45	120-277	0-10V	3,500/4,000/5,000	6,380	47-13/16" x 23-7/8" x 3-1/8"	1	UL / DLC STD



LED BACK-LIT FLAT PANEL

■ ASD-BLP

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-BLP-14A40-4P	1x4	25/30/40	120-277	0-10V	3,500/4,000/5,000	5,000	49-1/8" x 15-5/8" x 1-11/16"	4	UL / DLC PRM
ASD-BLP-22A30-4P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,633	23-3/4" x 23-3/4" x 1-3/8"	1	UL / DLC PRM
ASD-BLP-24A40-4P	2x4	25/30/40	120-277	0-10V	3,500/4,000/5,000	5,025	47-3/4" x 23-3/4" x 1-3/8"	1	UL / DLC PRM
ASD-BLP-24A50-4P	2x4	30/40/50	120-277	0-10V	3,500/4,000/5,000	6,341	47-3/4" x 23-3/4" x 1-3/8"	1	UL / DLC PRM

WITH MOTION SENSOR

ASD-BLP-22A30-MS-2P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,633	23-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM
ASD-BLP-24A40-MS-2P	2x4	25/30/40	120-277	0-10V	3,500/4,000/5,000	5,025	47-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM

WITH Q-BASE & BATTERY BACK-UP

ASD-BLP-22A30-QB-8EM-2P	2x2	20/25/30	120-277	0-10V	3,500/4,000/5,000	3,633	23-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM
ASD-BLP-24A40-QB-8EM-2P	2x4	25/30/40	120-277	0-10V	3,500/4,000/5,000	5,025	47-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM

ACCESSORIES

Microwave Motion Sensor magnet base 16ft					ASD-M2MW-WH	2-9/16" x 13/16" x 5/8"	120	UL
NLS Microwave Motion Sensor magnet base 16ft					ASD-M2MW-NLS	2-9/16" x 13/16" x 5/8"	120	UL
Remote Control for Motion Sensor					ASD-06RC	5-11/16" x 1-3/4" x 13/16"	60	-
Surface mounting Low Frame for 1x4					ASD-FELP14-L	48" x 12-1/8" x 1-15/16"	9	-
Surface mounting Low Frame for 2x2					ASD-FELP22-L	24" x 23-15/16" x 1-15/16"	9	-
Surface mounting Low Frame for 2x4					ASD-FELP24-L	48" x 23-15/16" x 1-15/16"	9	-



LED BACK-LIT FLAT PANEL PRO series
10 YEAR WARRANTY

■ ASD-BLP-PRO

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-BLP-PRO-24A40-4P	2x4	25/30/40	120-277	0-10V	3,500/4,000/5,000	5,025	47-3/4" x 23-3/4" x 1-3/8"	1	UL / DLC PRM

ACCESSORIES

Surface mounting Low Frame for 1x4					ASD-FELP14-L	48" x 12-1/8" x 1-15/16"	9	-
Surface mounting Low Frame for 2x2					ASD-FELP22-L	24" x 23-15/16" x 1-15/16"	9	-
Surface mounting Low Frame for 2x4					ASD-FELP24-L	48" x 23-15/16" x 1-15/16"	9	-



SMART LED BACK-LIT FLAT PANEL

■ ASD-BLP-SM

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-BLP-22D35SM-2P	2x2	35	120-277	SMART APP	3,500-5,000	4,266	23-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM
ASD-BLP-24D40SM-2P	2x4	40	120-277	SMART APP	3,500-5,000	4,924	47-3/4" x 23-3/4" x 1-3/8"	2	UL / DLC PRM

WITH RGBW

ASD-BLP-22D35-RGBW-2P	2x2	35	120-277	SMART APP	3,500 – 5,000+RGBW	4,282	23-3/4" x 23-3/4" x 1-3/8"	2	UL
ASD-BLP-24D40-RGBW-2P	2x4	40	120-277	SMART APP	3,500 – 5,000+RGBW	4,961	47-3/4" x 23-3/4" x 1-3/8"	2	UL

ACCESSORIES

Surface mounting Low Frame for 1x4					ASD-FELP14-L	48" x 12-1/8" x 1-15/16"	9	-
Surface mounting Low Frame for 2x2					ASD-FELP22-L	24" x 23-15/16" x 1-15/16"	9	-
Surface mounting Low Frame for 2x4					ASD-FELP24-L	48" x 23-15/16" x 1-15/16"	9	-



LED TRIMLESS DOWNLIGHT COMBO GIMBAL

■ ASD-TCS

Model	Head Quantity	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-TCS-1D15WH	1 pc	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,234	White	6-3/8" x 6-3/8" x 3-1/8"	18	ETL
ASD-TCS-2D30WH	2 pcs	30	120	Triac	2,700/3,000/3,500/4,000/5,000	2,112	White	10-1/8" x 6-3/8" x 3-1/8"	8	ETL
ASD-TCS-3D45WH	3 pcs	45	120	Triac	2,700/3,000/3,500/4,000/5,000	3,308	White	13-15/16" x 6-3/8" x 3-1/8"	4	ETL



LED ROUND TRIMLESS DOWNLIGHT

■ ASD-CD-TR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TR-1D7AC-WH	1"	7	120	Triac	2,700/3,000/3,500/4,000/5,000	498	White	3-3/4" x 3-3/4" x 3-5/8"	24	ETL
ASD-CD-TR-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	643	White	3-9/16" x 3-9/16" x 2-3/8"	18	ETL / Energy Star
ASD-CD-TR-2D15AC-WH	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,029	White	3-9/16" x 3-9/16" x 5-1/16"	18	ETL / Energy Star
ASD-CD-TR-2D15WH-4P	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,029	White	3-9/16" x 3-9/16" x 5-1/16"	2	ETL / Energy Star
ASD-CD-TR-2D15AC-BK	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,029	Black	3-9/16" x 3-9/16" x 5-1/16"	18	ETL / Energy Star
ASD-CD-TR-3D15AC-WH	3"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,226	White	4-15/16" x 4-15/16" x 4-7/16"	18	ETL / Energy Star
ASD-CD-TR-3D12AC-WH	3.5"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	933	White	5-7/8" x 5-7/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-TR-3D12WH-4P	3.5"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	933	White	5-7/8" x 5-7/8" x 2-15/16"	2	ETL / Energy Star
ASD-CD-TR-3D12AC-BK	3.5"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	933	Black	5-7/8" x 5-7/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-TR-4D15AC-WH	4"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,055	White	5-7/8" x 5-7/8" x 3-1/8"	18	ETL / Energy Star
ASD-CD-TR-4D15WH-4P	4"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,055	White	5-7/8" x 5-7/8" x 3-1/8"	2	ETL / Energy Star
ASD-CD-TR-4D15AC-BK	4"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,055	Black	5-7/8" x 5-7/8" x 3-1/8"	18	ETL / Energy Star
ASD-CD-TR-6D24AC-WH	6"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,075	White	8-11/16" x 8-11/16" x 3-9/16"	12	ETL / Energy Star
ASD-CD-TR-6D24AC-BK	6"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,075	Black	8-11/16" x 8-11/16" x 3-9/16"	12	ETL / Energy Star

120-277V

ASD-CD-TR-MV-2D15AC-WH	2"	15	120-277	0-10V	2,700/3,000/3,500/4,000/5,000	1,077	White	3-9/16" x 3-9/16" x 4-15/16"	18	ETL / Energy Star
ASD-CD-TR-MV-4D15AC-WH	4"	15	120-277	0-10V	2,700/3,000/3,500/4,000/5,000	1,082	White	5-7/8" x 5-7/8" x 3-1/8"	18	ETL / Energy Star
ASD-CD-TR-MV-6D24AC-WH	6"	24	120-277	0-10V	2,700/3,000/3,500/4,000/5,000	2,023	White	8-11/16" x 8-11/16" x 3-5/8"	12	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-

LED SQUARE TRIMLESS DOWNLIGHT

■ ASD-CD-TS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TS-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	636	White	4-1/8" x 4-1/8" x 3-3/8"	18	ETL / Energy Star
ASD-CD-TS-2D15AC-WH	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,026	White	4-1/8" x 4-1/8" x 5-9/16"	18	ETL / Energy Star
ASD-CD-TS-2D15AC-BK	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,026	Black	4-1/8" x 4-1/8" x 5-9/16"	18	ETL / Energy Star
ASD-CD-TS-3D15AC-WH	3"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,243	White	5-1/2" x 5-1/2" x 4-15/16"	18	ETL / Energy Star
ASD-CD-TS-3D12AC-WH	3.5"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	953	White	5-11/16" x 5-11/16" x 3-1/16"	18	ETL / Energy Star
ASD-CD-TS-3D12AC-BK	3.5"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	953	Black	5-11/16" x 5-11/16" x 3-1/16"	18	ETL / Energy Star
ASD-CD-TS-4D15AC-WH	4"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,090	White	6-5/16" x 6-5/16" x 4"	18	ETL / Energy Star
ASD-CD-TS-4D15AC-BK	4"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,090	Black	6-5/16" x 6-5/16" x 4"	18	ETL / Energy Star
ASD-CD-TS-6D24AC-WH	6"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,038	White	8-1/8" x 8-1/8" x 3-11/16"	12	ETL / Energy Star
ASD-CD-TS-6D24AC-BK	6"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,038	Black	8-1/8" x 8-1/8" x 3-11/16"	12	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-



LED ROUND TRIMLESS DOWNLIGHT GIMBAL

■ ASD-CD-TG, ASD-CD-TGR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TG-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	717	White	4-1/16" x 4-1/16" x 2-3/8"	18	ETL / Energy Star
ASD-CD-TGR-2D8AC-BK	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	717	Black	4-1/16" x 4-1/16" x 2-11/16"	18	ETL / Energy Star
ASD-CD-TGR-3D12AC-WH	3"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,043	White	4-1/16" x 4-1/16" x 5-9/16"	18	ETL / Energy Star
ASD-CD-TGR-4D17AC-WH	4"	17	120	Triac	2,700/3,000/3,500/4,000/5,000	1,623	White	6-11/16" x 6-11/16" x 4"	18	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-

LED SQUARE TRIMLESS DOWNLIGHT GIMBAL

■ ASD-CD-TGS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TGS-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	672	White	5-1/8" x 5-1/8" x 2-3/4"	18	ETL
ASD-CD-TGS-2D8AC-BK	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	672	Black	5-1/8" x 5-1/8" x 2-3/4"	18	ETL

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-

LED ROUND DOWNLIGHT 1 & 2 INCH

■ ASD-CD-PR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-CD-PR-1D7AC-BK	1"	7	120	Triac	2,700/3,000/3,500/4,000/5,000	550	Black	2-3/8" x 3-3/8"	24	ETL
ASD-CD-PR-1D7AC-WH	1"	7	120	Triac	2,700/3,000/3,500/4,000/5,000	550	White	2-3/8" x 3-3/8"	24	ETL
ASD-CD-PR-2D8AC-BK	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	649	Black	3-1/8" x 2-3/4"	18	ETL / Energy Star
ASD-CD-PR-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	649	White	3-1/8" x 2-3/4"	18	ETL / Energy Star
ASD-CD-PR-2D15AC-BK	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,110	Black	3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PR-2D15AC-WH	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,110	White	3-1/8" x 4-15/16"	18	ETL / Energy Star

120-277V

ASD-CD-PR-MV-2D15AC-WH	2"	15	120-277	0-10V	2,700/3,000/3,500/4,000/5,000	1,087	White	3-1/8" x 4-15/16"	18	ETL / Energy Star
------------------------	----	----	---------	-------	-------------------------------	-------	-------	-------------------	----	-------------------

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-



LED SQUARE DOWNLIGHT 1 & 2 INCH

■ ASD-CD-PS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Reflector finish	Trim finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-PS-1D7AC-BK	1"	7	120	Triac	2,700/3,000/3,500/4,000/5,000	560	Black	Black	2-3/8" x 2-3/8" x 3-3/8"	24	ETL
ASD-CD-PS-1D7AC-WH	1"	7	120	Triac	2,700/3,000/3,500/4,000/5,000	560	White	White	2-3/8" x 2-3/8" x 3-3/8"	24	ETL
ASD-CD-PS-2D8AC-BK	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	615	Black	Black	3-1/8" x 3-1/8" x 2-13/16"	18	ETL / Energy Star
ASD-CD-PS-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	615	White	White	3-1/8" x 3-1/8" x 2-13/16"	18	ETL / Energy Star
ASD-CD-PS-2D15AC-BK	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,103	Black	Black	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PS-2D15AC-WH	2"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,103	White	White	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-

LED DOWNLIGHT 2 INCH WITH ROUND WASH TRIM

■ ASD-CD-PWR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-CD-PWR-2D8AC-WH	2"	8	120	Triac	2,700/3,000/3,500/4,000/5,000	416	White	3-1/8" x 2-13/16"	18	ETL

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-

LED ROUND COMMERCIAL DOWNLIGHT

■ ASD-CDL7

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-CDL7-4DA13AC	4"	7/10/13	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	1,100	White	5-3/8" x 3-1/16"	8	UL / Energy Star
ASD-CDL7-6DA22AC	6"	10/15/22	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	1,850	White	8-1/4" x 4"	8	UL / Energy Star
ASD-CDL7-6DA22AC-BK	6"	10/15/22	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	1,850	Black	8-1/4" x 4"	8	UL / Energy Star
ASD-CDL7-8DA30AC	8"	12/20/30	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	2,400	White	10-1/4" x 4-7/16"	4	UL / Energy Star
ASD-CDL7-8DA30AC-BK	8"	12/20/30	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	2,400	Black	10-1/4" x 4-7/16"	4	UL / Energy Star
ASD-CDL7-10DA40AC	10"	20/30/40	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,000	White	11-5/16" x 4-15/16"	4	UL / Energy Star
ASD-CDL7-10DA40AC-BK	10"	20/30/40	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,000	Black	11-5/16" x 4-15/16"	4	UL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR-346-FA-6PACK	13-1/4" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR18-346-FA-6PACK	18" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 8-10-12"	ASD-MPLR-81012-FA-6PACK	18-1/2" x 13-3/8" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 3-4-6"	ASD-MPLR-346-FS-6PACK	26" x 8-1/4" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 8-10-12"	ASD-MPLR-81012-FS-6PACK	26" x 13" x 1/16"	4	-
New Construction Mounting Plate with Round holes and Sliding Clips 3-4-6"	ASD-MPLR-346-SC-6PACK	14-3/8" x 10-9/16" x 1-5/8"	2	-
New Construction Mounting Plate with Round holes and Sliding Clips 8-10-12"	ASD-MPLR-81012-SC-6PACK	17-11/16" x 13" x 1-9/16"	2	-



LED ROUND COMMERCIAL DOWNLIGHT

■ ASD-CDL7R

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-CDL7R-6A30WH	6"	12/16/22/26/30	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,352	White	8-3/8" x 4-13/16"	8	ETL / Energy Star
ASD-CDL7R-8A35WH	8"	16/22/26/30/35	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	4,245	White	10-5/16" x 5-5/16"	4	ETL / Energy Star
ASD-CDL7R-10A40WH	10"	22/26/30/35/40	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	4,791	White	11-9/16" x 5-15/16"	4	ETL / Energy Star

WITH BATTERY BACK-UP

ASD-CDL7R-6A30WH-EM	6"	12/16/22/26/30	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,352	White	8-11/16" x 4-5/16"	8	ETL / Energy Star
ASD-CDL7R-8A35WH-EM	8"	16/22/26/30/35	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	4,245	White	10-1/4" x 4-5/16"	4	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR-346-FA-6PACK	13-1/4" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR18-346-FA-6PACK	18" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 8-10-12"	ASD-MPLR-81012-FA-6PACK	18-1/2" x 13-3/8" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 3-4-6"	ASD-MPLR-346-FS-6PACK	26" x 8-1/4" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 8-10-12"	ASD-MPLR-81012-FS-6PACK	26" x 13" x 1/16"	4	-
New Construction Mounting Plate with Round holes and Sliding Clips 3-4-6"	ASD-MPLR-346-SC-6PACK	14-3/8" x 10-9/16" x 1-5/8"	2	-
New Construction Mounting Plate with Round holes and Sliding Clips 8-10-12"	ASD-MPLR-81012-SC-6PACK	17-11/16" x 13" x 1-9/16"	2	-

LED SQUARE COMMERCIAL DOWNLIGHT

■ ASD-CDL7S

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CDL7S-6A30WH	6"	12/16/22/26/30	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,009	White	8-11/16" x 8-11/16" x 4-5/16"	8	ETL / Energy Star
ASD-CDL7S-8A35WH	8"	16/22/26/30/35	120-277	0-10 V	2,700/3,000/3,500/4,000/5,000	3,711	White	10-1/4" x 10-1/4" x 4-1/4"	4	ETL / Energy Star

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-
New Construction Flat Mounting Plate with Square Asymmetric holes 3-4-6"	ASD-MPLS-346-FA-6PACK	13-1/4" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Square Asymmetric holes 8-10-12"	ASD-MPLS-81012-FA-6PACK	18-1/2" x 13-3/8" x 1/16"	4	-
New Construction Flat Mounting Plate with Square Symmetric holes 3-4-6"	ASD-MPLS-346-FS-6PACK	26" x 8-1/4" x 1/16"	4	-
New Construction Flat Mounting Plate with Square Symmetric holes 8-10-12"	ASD-MPLS-81012-FS-6PACK	26" x 13" x 1/16"	4	-
New Construction Mounting Plate with Square holes and Sliding Clips 3-4-6"	ASD-MPLS-346-SC-6PACK	14-3/8" x 10-9/16" x 1-5/8"	2	-
New Construction Mounting Plate with Square holes and Sliding Clips 8-10-12"	ASD-MPLS-81012-SC-6PACK	17-11/16" x 13" x 1-9/16"	2	-

LED ROUND RECESSED MINI PANEL WITH BAFFLE TRIM

■ ASD-JBRB-MV

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-JBRB-MV-4D12WH	4"	12	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	935	White	5" x 2-3/16"	6	ETL
ASD-JBRB-MV-4D12BK	4"	12	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	935	Black	5" x 2-3/16"	6	ETL
ASD-JBRB-MV-6D15WH	6"	15	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	1,214	White	6-7/8" x 2-3/16"	6	ETL
ASD-JBRB-MV-6D15BK	6"	15	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	1,214	Black	6-7/8" x 2-3/16"	6	ETL

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR-346-FA-6PACK	13-1/4" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR18-346-FA-6PACK	18" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 3-4-6"	ASD-MPLR-346-FS-6PACK	26" x 8-1/4" x 1/16"	4	-
New Construction Mounting Plate with Round holes and Sliding Clips 3-4-6"	ASD-MPLR-346-SC-6PACK	14-3/8" x 10-9/16" x 1-5/8"	2	-



LED ROUND RECESSED MINI PANEL FIRE RATED

■ ASD-JFR, ASD-JFRB

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-JFR-4D12AC-WH	4"	12	120 V	Triac	2,700/3,000/3,500/4,000/5,000	840	White	5" x 2"	12	ETL
ASD-JFR-6D15AC-WH	6"	15	120 V	Triac	2,700/3,000/3,500/4,000/5,000	1,166	White	6-7/8" x 2"	12	ETL

120-277V WITH BAFFLE TRIM

ASD-JFRB-MV-4D12BK	4"	12	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	921	Black	5" x 2-3/16"	6	ETL
ASD-JFRB-MV-4D12WH	4"	12	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	921	White	5" x 2-3/16"	6	ETL
ASD-JFRB-MV-6D15 BK	6"	15	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	1,197	Black	6-7/8" x 2-1/4"	6	ETL
ASD-JFRB-MV-6D15WH	6"	15	120-277 V	0-10V	2,700/3,000/3,500/4,000/5,000	1,197	White	6-7/8" x 2-1/4"	6	ETL

ACCESSORIES

Battery Back-up kit 8W	BLD-HM08D	10-7/16" x 1-15/16" x 15/16"	10	UL
Battery Back-up kit 15W	BLD-HM15D	12-15/16" x 1-7/16" x 15/16"	10	UL
Battery Back-up kit 15W	ASD-EMA15	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Battery Back-up kit 15W	ASD-EMA15-NLS	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and NLS EM Battery	ASD-G02-NLS	4-1/4" x 5-3/16" x 1-1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR-346-FA-6PACK	13-1/4" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Asymmetric holes 3-4-6"	ASD-MPLR18-346-FA-6PACK	18" x 9-1/16" x 1/16"	4	-
New Construction Flat Mounting Plate with Round Symmetric holes 3-4-6"	ASD-MPLR-346-FS-6PACK	26" x 8-1/4" x 1/16"	4	-
New Construction Mounting Plate with Round holes and Sliding Clips 3-4-6"	ASD-MPLR-346-SC-6PACK	14-3/8" x 10-9/16" x 1-5/8"	2	-



LED LOW-PROFILE CANOPY WITH Q-BASE

■ ASD-CAN07A

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN07A-45WH	45	120-277	1-10V	3,000/4,000/5,000	6,917	White	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM
ASD-CAN07A-45BK	45	120-277	1-10V	3,000/4,000/5,000	6,917	Black	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM
ASD-CAN07A-70WH	70	120-277	1-10V	3,000/4,000/5,000	9,332	White	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM
ASD-CAN07A-70BK	70	120-277	1-10V	3,000/4,000/5,000	9,332	Black	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-CAN07A-45WH-8EM	45	120-277	0-10V	3,000/4,000/5,000	6,917	White	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM
ASD-CAN07A-45BK-8EM	45	120-277	0-10V	3,000/4,000/5,000	6,917	Black	10-9/16" x 9-13/16" x 2-15/16"	6	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft	ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft	ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft	ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft	ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Remote Control for Motion Sensor	ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-



LED EDGE-LIT CANOPY SQUARE WITH Q-BASE

■ ASD-CAN09S

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN09S-A50WH	30/40/50	120-277	0-10V	3,000/4,000/5,000	6,887	White	10" x 10" x 3-1/16"	4	UL / DLC PRM
ASD-CAN09S-A50BK	30/40/50	120-277	0-10V	3,000/4,000/5,000	6,887	Black	10" x 10" x 3-1/16"	4	UL / DLC PRM
ASD-CAN09S-A80WH	50/70/80	120-277	0-10V	3,000/4,000/5,000	11,033	White	10" x 10" x 3-1/16"	4	UL / DLC PRM
ASD-CAN09S-A80BK	50/70/80	120-277	0-10V	3,000/4,000/5,000	11,033	Black	10" x 10" x 3-1/16"	4	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-CAN09S-A80WH-8EM	50/70/80	120-277	0-10V	3,000/4,000/5,000	11,033	White	10" x 10" x 3-1/16"	4	UL / DLC PRM
ASD-CAN09S-A80BK-8EM	50/70/80	120-277	0-10V	3,000/4,000/5,000	11,033	Black	10" x 10" x 3-1/16"	4	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft	ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft	ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft	ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft	ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Remote Control for Motion Sensor	ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-



LED AREA LIGHT STANDARD series

■ ASD-LSB5

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSB5B-150D50BR	150	120-277	0-10V	5,000	22,398	Bronze	14-5/16" x 11" x 2-13/16"	1	UL / DLC PRM
ASD-LSB5B-200D50BR	200	120-277	0-10V	5,000	30,071	Bronze	14-5/16" x 11" x 2-13/16"	1	UL / DLC PRM
ASD-LSB5B-240D50BR	240	120-277	0-10V	5,000	35,843	Bronze	18-1/2" x 12-9/16" x 2-13/16"	1	UL / DLC PRM
ASD-LSB5B-300D50BR	300	120-277	0-10V	5,000	44,069	Bronze	18-1/2" x 12-9/16" x 2-13/16"	1	UL / DLC PRM

ACCESSORIES

Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-BR	Bronze	6-13/16" x 6-1/4" x 2-5/16"	10	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-BR	Bronze	7-1/4" x 4-15/16" x 6-1/4"	20	-
Floodlight Mounting Bracket for 100-200W	ASD-FM1-LSB5-BR	Bronze	12-3/16" x 7-1/4" x 1-3/4"	10	-
Floodlight Mounting Bracket for 240-300W	ASD-FM2-LSB5-BR	Bronze	13-3/4" x 8-5/8" x 1-15/16"	10	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-BR	Bronze	7-1/16" x 4-15/16" x 3-1/16"	20	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-BR	Bronze	6-9/16" x 4-7/16" x 1-7/8"	20	-
Tenon Bracket	ASD-TN-BR	Bronze	9-7/16" x 3-15/16" x 8-11/16"	5	-
Dual Bull tenon Bracket for 100-300W	ASD-B2BT	Bronze	26" x 14-3/16" x 2-3/4"	2	-
Triple Bull tenon Bracket for 100-300W	ASD-B3BT	Bronze	37-13/16" x 14-3/16" x 2-3/4"	1	-
Wall Mounting Bracket for 100-300W	ASD-WMB-LSB-BR	Bronze	7-3/16" x 6-1/4" x 3-5/16"	8	-
Spill Shield for 100-200W	ASD-SPS-LSB5-BR	Bronze	11" x 5-7/8" x 2-3/4"	10	-
Spill Shield for 240-500W	ASD-SPS2-LSB5-BR	Bronze	11-15/16" x 8-1/2" x 2-3/4"	10	-
Clear Lens Type II-S for 100-200W	ASD-L2A-LSB5	Clear	10-1/4" x 8-3/4" x 5/16"	50	-
Clear Lens Type II-S for 240-300W	ASD-L2B-LSB5	Clear	11-13/16" x 11-13/16" x 5/16"	25	-
Clear Lens Type IV-S for 100-200W	ASD-L4A-LSB5	Clear	10-1/4" x 8-3/4" x 5/16"	50	-
Clear Lens Type IV-S for 240-300W	ASD-L4B-LSB5	Clear	11-13/16" x 11-13/16" x 5/16"	25	-
Clear Lens Type V-S for 100-200W	ASD-L5A-LSB5	Clear	10-1/4" x 8-3/4" x 5/16"	50	-
Clear Lens Type V-S for 240-300W	ASD-L5B-LSB5	Clear	11-13/16" x 11-13/16" x 5/16"	25	-



LED AREA LIGHT WITH Q-BASE PRO series

■ ASD-LSB5B-PRO

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSB5B-PRO-150BR	100/120/150	120-277	0-10V	3,000/4,000/5,000	24,914	Bronze	12-5/16" x 11-5/16" x 2-7/16"	1	UL / DLC PRM
ASD-LSB5B-PRO-150BK	100/120/150	120-277	0-10V	3,000/4,000/5,000	24,914	Black	12-5/16" x 11-5/16" x 2-7/16"	1	UL / DLC PRM
ASD-LSB5B-PRO-150SL	100/120/150	120-277	0-10V	3,000/4,000/5,000	24,914	Silver	12-5/16" x 11-5/16" x 2-7/16"	1	UL / DLC PRM
ASD-LSB5B-PRO-150WH	100/120/150	120-277	0-10V	3,000/4,000/5,000	24,914	White	12-5/16" x 11-5/16" x 2-7/16"	1	UL / DLC PRM
ASD-LSB5B-PRO-200BR	100/150/200	120-277	0-10V	3,000/4,000/5,000	33,400	Bronze	12-5/16" x 11-5/16" x 2-7/16"	1	UL / DLC PRM
ASD-LSB5B-PRO-240BR	150/200/240	120-277	0-10V	3,000/4,000/5,000	39,470	Bronze	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5B-PRO-300BR	200/240/300	120-277	0-10V	3,000/4,000/5,000	51,504	Bronze	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5B-PRO-300BK	200/240/300	120-277	0-10V	3,000/4,000/5,000	51,504	Black	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5B-PRO-300SL	200/240/300	120-277	0-10V	3,000/4,000/5,000	51,504	Silver	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5B-PRO-300WH	200/240/300	120-277	0-10V	3,000/4,000/5,000	51,504	White	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5B-PRO-500BR	300/400/500	120-277	0-10V	3,000/4,000/5,000	83,958	Bronze	29-7/16" x 12-3/16" x 2-3/4"	1	UL / DLC PRM

HIGH VOLTAGE

ASD-LSB5BHV-PRO-240BR	150/200/240	200-480	0-10V	3,000/4,000/5,000	40,311	Bronze	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5BHV-PRO-300BR	200/240/300	200-480	0-10V	3,000/4,000/5,000	51,346	Bronze	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5BHV-PRO-300SL	200/240/300	200-480	0-10V	3,000/4,000/5,000	51,346	Silver	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5BHV-PRO-300WH	200/240/300	200-480	0-10V	3,000/4,000/5,000	51,346	White	16-9/16" x 12-3/16" x 2-1/2"	1	UL / DLC PRM
ASD-LSB5BHV-PRO-500BR	300/400/500	200-480	0-10V	3,000/4,000/5,000	84,226	Bronze	29-7/16" x 12-3/16" x 2-3/4"	1	UL / DLC PRM

ACCESSORIES

Infrared Motion Sensor 3pin 39ft	ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft	ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft	ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft	ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Remote Control for Motion Sensor	ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-
Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-BR	Bronze	6-13/16" x 6-1/4" x 2-5/16"	10	-
Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-BK	Black	6-13/16" x 6-1/4" x 2-5/16"	10	-
Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-SL	Silver	6-13/16" x 6-1/4" x 2-5/16"	10	-
Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-WH	White	6-13/16" x 6-1/4" x 2-5/16"	10	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-BR	Bronze	7-1/4" x 4-15/16" x 6-1/4"	20	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-BK	Black	7-1/4" x 4-15/16" x 6-1/4"	20	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-SL	Silver	7-1/4" x 4-15/16" x 6-1/4"	20	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-WH	White	7-1/4" x 4-15/16" x 6-1/4"	20	-
Adjustable Arm Mounting Bracket for 400-500W	ASD-AMR2-LSB-BR	Bronze	9-5/8" x 6-1/4" x 4-5/16"	10	-
Adjustable Arm Mounting Bracket for 400-500W	ASD-AMR2-LSB-BK	Black	9-5/8" x 6-1/4" x 4-5/16"	10	-
Adjustable Arm Mounting Bracket for 400-500W	ASD-AMR2-LSB-SL	Silver	9-5/8" x 6-1/4" x 4-5/16"	10	-
Adjustable Arm Mounting Bracket for 400-500W	ASD-AMR2-LSB-WH	White	9-5/8" x 6-1/4" x 4-5/16"	10	-
Floodlight Mounting Bracket for 100-200W	ASD-FM1-LSB5B-BR	Bronze	11-7/16" x 6-5/16" x 9-7/8"	10	-
Floodlight Mounting Bracket for 100-200W	ASD-FM1-LSB5B-BK	Black	11-7/16" x 6-5/16" x 9-7/8"	10	-
Floodlight Mounting Bracket for 100-200W	ASD-FM1-LSB5B-SL	Silver	11-7/16" x 6-5/16" x 9-7/8"	10	-
Floodlight Mounting Bracket for 100-200W	ASD-FM1-LSB5B-WH	White	11-7/16" x 6-5/16" x 9-7/8"	10	-
Floodlight Mounting Bracket for 240-300W	ASD-FM2-LSB5B-BR	Bronze	12-9/16" x 6-1/16" x 9-5/16"	10	-
Floodlight Mounting Bracket for 240-300W	ASD-FM2-LSB5B-BK	Black	12-9/16" x 6-1/16" x 9-5/16"	10	-
Floodlight Mounting Bracket for 240-300W	ASD-FM2-LSB5B-SL	Silver	12-9/16" x 6-1/16" x 9-5/16"	10	-
Floodlight Mounting Bracket for 240-300W	ASD-FM2-LSB5B-WH	White	12-9/16" x 6-1/16" x 9-5/16"	10	-
Floodlight Mounting Bracket for 400-500W	ASD-FM3-LSB5B-BR	Bronze	12-11/16" x 7-1/2" x 12-3/8"	5	-
Floodlight Mounting Bracket for 400-500W	ASD-FM3-LSB5B-BK	Black	12-11/16" x 7-1/2" x 12-3/8"	5	-
Floodlight Mounting Bracket for 400-500W	ASD-FM3-LSB5B-SL	Silver	12-11/16" x 7-1/2" x 12-3/8"	5	-
Floodlight Mounting Bracket for 400-500W	ASD-FM3-LSB5B-WH	White	12-11/16" x 7-1/2" x 12-3/8"	5	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-BR	Bronze	7-1/16" x 4-15/16" x 3-1/16"	20	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-BK	Black	7-1/16" x 4-15/16" x 3-1/16"	20	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-SL	Silver	7-1/16" x 4-15/16" x 3-1/16"	20	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-WH	White	7-1/16" x 4-15/16" x 3-1/16"	20	-
Slip fitter Mounting Bracket for 400-500W	ASD-SF2-LSB-BR	Bronze	10-11/16" x 4-5/16" x 3-3/8"	10	-
Slip fitter Mounting Bracket for 400-500W	ASD-SF2-LSB-BK	Black	10-11/16" x 4-5/16" x 3-3/8"	10	-
Slip fitter Mounting Bracket for 400-500W	ASD-SF2-LSB-SL	Silver	10-11/16" x 4-5/16" x 3-3/8"	10	-
Slip fitter Mounting Bracket for 400-500W	ASD-SF2-LSB-WH	White	10-11/16" x 4-5/16" x 3-3/8"	10	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-BR	Bronze	6-9/16" x 4-7/16" x 1-7/8"	20	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-BK	Black	6-9/16" x 4-7/16" x 1-7/8"	20	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-SL	Silver	6-9/16" x 4-7/16" x 1-7/8"	20	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-WH	White	6-9/16" x 4-7/16" x 1-7/8"	20	-
Full Trunnion Mounting Bracket for 400-500W	ASD-TR2-LSB-BR	Bronze	7-1/16" x 5-7/8" x 2-11/16"	10	-
Full Trunnion Mounting Bracket for 400-500W	ASD-TR2-LSB-BK	Black	7-1/16" x 5-7/8" x 2-11/16"	10	-
Full Trunnion Mounting Bracket for 400-500W	ASD-TR2-LSB-SL	Silver	7-1/16" x 5-7/8" x 2-11/16"	10	-
Full Trunnion Mounting Bracket for 400-500W	ASD-TR2-LSB-WH	White	7-1/16" x 5-7/8" x 2-11/16"	10	-
Tenon Bracket	ASD-TN-BR	Bronze	9-7/16" x 3-15/16" x 8-11/16"	5	-
Dual Bull tenon Bracket for 100-300W	ASD-B2BT	Bronze	26" x 14-3/16" x 2-3/4"	2	-
Triple Bull tenon Bracket for 100-300W	ASD-B3BT	Bronze	37-13/16" x 14-3/16" x 2-3/4"	1	-
Wall Mounting Bracket for 100-300W	ASD-WMB-LSB-BR	Bronze	7-3/16" x 6-1/4" x 3-5/16"	8	-
Clear Lens Type II-S for 100-200W	ASD-L2A-LSB5B	Clear	10-9/16" x 5-7/8" x 1/2"	30	-
Clear Lens Type II-S for 240-500W	ASD-L2B-LSB5B	Clear	11-7/8" x 8-1/4" x 7/16"	30	-
Clear Lens Type IV-S for 100-200W	ASD-L4A-LSB5B	Clear	10-9/16" x 5-7/8" x 1/2"	30	-
Clear Lens Type IV-S for 240-500W	ASD-L4B-LSB5B	Clear	11-7/8" x 8-1/4" x 7/16"	30	-
Clear Lens Type V-S for 100-200W	ASD-L5A-LSB5B	Clear	10-9/16" x 5-7/8" x 1/2"	30	-
Clear Lens Type V-S for 240-500W	ASD-L5B-LSB5B	Clear	11-7/8" x 8-1/4" x 7/16"	30	-
60 Floodlight Clear Lens for 100-200W	ASD-LFLA-LSB5B	Clear	10-9/16" x 5-7/8" x 1/2"	30	-
60 Floodlight Clear Lens for 240-500W	ASD-LFLB-LSB5B	Clear	11-7/8" x 8-1/4" x 7/16"	30	-
Spill Shield for 100-200W	ASD-SPS-LSB5-BR	Bronze	11" x 5-7/8" x 2-3/4"	10	-
Spill Shield for 240-500W	ASD-SPS2-LSB5-BR	Bronze	11-15/16" x 8-1/2" x 2-3/4"	10	-



LED ROUND AREA LIGHT WITH Q-BASE

■ ASD-LSB5R-PRO

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSB5R-PRO-100BK	35/55/75/100	120-277	0-10V	3,000/4,000/5,000	15,223	Black	11-1/2" x 11-7/16" x 2-5/8"	1	UL / DLC PRM

WITH POST BRACKET

ASD-LSB5R-PRO-100BK-POST	35/55/75/100	120-277	0-10V	3,000/4,000/5,000	15,223	Black	11-1/2" x 12-9/16" x 18-3/4"	1	UL / DLC PRM
--------------------------	--------------	---------	-------	-------------------	--------	-------	------------------------------	---	--------------

ACCESSORIES

Infrared Motion Sensor 3pin 39ft	ASD-09IR-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 39ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Infrared Motion Sensor 3pin 50ft	ASD-09IR50-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09MW-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Microwave Motion Sensor 3pin 49ft	ASD-09IR-BK	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
NLS Infrared Motion Sensor 3pin 39ft	ASD-09IR-NLS-WH	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
NLS Microwave Motion Sensor 3pin 49ft	ASD-09MW-NLS-WH	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
Remote Control for Motion Sensor	ASD-06RC	-	5-11/16" x 1-3/4" x 13/16"	60	-
Post Bracket	ASD-POST-LSB5	Black	8-3/4" x 18-1/4" x 4-15/16"	4	-
Arm Mounting Bracket for 100-300W	ASD-AM-LSB5-BK	Black	6-13/16" x 6-1/4" x 2-5/16"	10	-
Adjustable Arm Mounting Bracket for 100-300W	ASD-AMR-LSB5-BK	Black	7-1/4" x 4-15/16" x 6-1/4"	20	-
Adjustable Arm Mounting Bracket for 400-500W	ASD-AMR2-LSB-BK	Black	9-5/8" x 6-1/4" x 4-5/16"	10	-
Slip fitter Mounting Bracket for 100-300W	ASD-SF-LSB5-BK	Black	7-1/16" x 4-15/16" x 3-1/16"	20	-
Slip fitter Mounting Bracket for 400-500W	ASD-SF2-LSB-BK	Black	10-11/16" x 4-5/16" x 3-3/8"	10	-
Full Trunnion Mounting Bracket for 100-300W	ASD-TR-LSB5-BK	Black	6-9/16" x 4-7/16" x 1-7/8"	20	-
Full Trunnion Mounting Bracket for 400-500W	ASD-TR2-LSB-BK	Black	7-1/16" x 5-7/8" x 2-11/16"	10	-

LED SPORT LIGHT

■ ASD-SPFL7, ASD-SPFL7-DMX

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Beam angles	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-SPFL7-300D50	300	120-277	0-10V	5,000	44,914	45°	17-5/8" x 16-1/8" x 16-1/16"	1	UL / DLC PRM
ASD-SPFL7-A500D50	300/400/500	120-277	0-10V	5,000	75,057	45°	17-5/8" x 16-1/8" x 16-1/16"	1	UL / DLC PRM

HIGH VOLTAGE

ASD-SPFL7-HV-A500D50	300/400/500	200-480	0-10V	5,000	75,057	45°	17-5/8" x 16-1/8" x 16-1/16"	1	UL / DLC PRM
ASD-SPFL7-HV-A750D50	600/680/750	200-480	0-10V	5,000	113,665	40°	31" x 17-7/8" x 17-3/4"	1	UL / DLC PRM
ASD-SPFL7-HV-A1000D50	600/750/1,000	200-480	0-10V	5,000	149,877	40°	37-1/4" x 22-5/8" x 21-1/4"	1	UL / DLC PRM
ASD-SPFL7-HV-A1300D50	1,000/1,200/1,300	200-480	0-10V	5,000	197,827	40°	37-1/4" x 22-5/8" x 21-1/4"	1	UL / DLC PRM

WITH DMX

ASD-SPFL7HV-A500D50-DMX	500	200-480	DMX	5,000	75,057	45°	17-5/8" x 10-15/16" x 16-1/8"	1	UL / DLC PRM
-------------------------	-----	---------	-----	-------	--------	-----	-------------------------------	---	--------------

WITH DMX & RGBW

ASD-SPFL7HV-A500RGBW-DMX	450	200-480	DMX	2,700 ~ 6,500 +RGB	33,619	45°	22-5/8" x 16-1/8" x 16	1	UL / DLC PRM
--------------------------	-----	---------	-----	--------------------	--------	-----	------------------------	---	--------------

ACCESSORIES

Slip-fitter bracket for 300-500W	ASD-SF1-SPFL7	15-1/4" x 17-11/16" x 3-1/16"	5	-
Slip-fitter bracket for 600-750W	ASD-SF2-SPFL7	17-3/8" x 19-7/8" x 3-1/16"	4	-
Slip-fitter bracket for 1000-1300W	ASD-SF3-SPFL7	21-11/16" x 20-1/4" x 3-1/8"	2	-
Laser Pointer for 300-500W	ASD-LSA-SPFL7	5-1/16" x 5-1/2" x 1-11/16"	10	-
Laser Pointer for 600-1300W	ASD-LSB-SPFL7	5-1/16" x 4-15/16" x 1-11/16"	10	-
Lens 20" NEMA2 for 600-800W	ASD-L20B-SPFL7	15-5/16" x 15-5/16" x 11/16"	10	-
Lens 20" NEMA2 for 1000-1300W	ASD-L20C-SPFL7	19-9/16" x 9-3/4" x 11/16"	20	-
Lens 30" NEMA4 for 300-500W	ASD-L30-SPFL7-300/500	14-5/16" x 14-5/16" x 1/2"	20	-

LED SPORT LIGHT

■ ASD-SPFL8



LED SECURITY WALLPACK WITH PHOTOCELL

■ ASD-SWP

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-SWP-28BR-PC	28	120	No	3,000/4,000/5,000	3,403	8-3/8" x 5-11/16" x 2-11/16"	6	UL
ASD-SWP-MV-A28BR-PC	20/24/28	120-277	0-10V	3,000/4,000/5,000	3,454	8-3/8" x 5-11/16" x 2-11/16"	6	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-SWP-MV-A28BR-PC-5EM	20/24/28	120-277	0-10V	3,000/4,000/5,000	3,454	8-3/8" x 5-11/16" x 2-11/16"	6	UL / DLC PRM
-------------------------	----------	---------	-------	-------------------	-------	------------------------------	---	--------------



LED TRADITIONAL WALLPACK

■ ASD-WLP01

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WLP01-50D50-PC	50	120-277 V	0-10V	5,000	7,692	14" x 9" x 7-1/8"	1	UL / DLC PRM
ASD-WLP01-50A-PC	30/40/50	120-277 V	0-10V	3,000/4,000/5,000	7,889	14" x 9" x 7-1/8"	1	UL / DLC PRM
ASD-WLP01-80D50-PC	80	120-277 V	0-10V	5,000	11,973	14" x 9" x 7-1/8"	1	UL / DLC PRM
ASD-WLP01-80A-PC	50/60/80	120-277 V	0-10V	3,000/4,000/5,000	12,213	14" x 9" x 7-1/8"	1	UL / DLC PRM
ASD-WLP01-120A-PC	80/100/120	120-277 V	1-10V	3,000/4,000/5,000	17,571	14" x 9" x 7-1/8"	1	UL / DLC PRM

WITH BATTERY BACK-UP

ASD-WLP01-50DAC-EM	50	120-277 V	1-10 V	3,000/4,000/5,000	7,773	14-1/4" x 9-5/16" x 7-9/16"	1	UL / DLC PRM
ASD-WLP01-80DAC-EM	80	120-277 V	1-10 V	3,000/4,000/5,000	12,174	14-1/4" x 9-5/16" x 7-9/16"	1	UL / DLC PRM

ACCESSORIES

Photocell kit	ASD-PC-WLP	7/8" x 7/8" x 3/4"	100
---------------	------------	--------------------	-----



LED ADJUSTABLE CUTOFF WALLPACK

■ ASD-WLP02A

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WLP02A-12DAC-PC-BK	12	120-277 V	0-10 V	3,000/4,000/5,000	1,686	5-7/8" x 5-1/16" x 3-9/16"	12	UL / DLC PRM
ASD-WLP02A-30DAC-PC-BK	30	120-277 V	0-10 V	3,000/4,000/5,000	4,058	9-1/8" x 7-5/8" x 4-5/8"	6	UL / DLC PRM
ASD-WLP02A-50DAC-PC-BK	50	120-277 V	0-10 V	3,000/4,000/5,000	7,047	9-1/8" x 7-5/8" x 4-5/8"	6	UL / DLC PRM

ACCESSORIES

Photocell kit	ASD-PC-WLP	7/8" x 7/8" x 3/4"	100
---------------	------------	--------------------	-----



LED FULL CUTOFF WALLPACK

■ ASD-WLP03

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WLP03-A50DAC-BR	30/40/50	120-277 V	0-10 V	3,000/4,000/5,000	6,723	14-3/16" x 9-1/4" x 6-9/16"	4	UL / DLC PRM
ASD-WLP03-A80DAC-BR	50/60/80	120-277 V	0-10 V	3,000/4,000/5,000	10,208	14-3/16" x 9-1/4" x 6-9/16"	4	UL / DLC PRM
ASD-WLP03-A120DAC-BR	80/100/120	120-277 V	0-10 V	3,000/4,000/5,000	16,198	14-3/16" x 9-1/4" x 6-9/16"	4	UL / DLC PRM

ACCESSORIES

Photocell kit	ASD-PC-WLP	7/8" x 7/8" x 3/4"	100
---------------	------------	--------------------	-----



LED SLIM WALLPACK

■ ASD-WLS

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WLS-A50BR-PC	30/40/50	120-277 V	0-10 V	3,000/4,000/5,000	6,577	11-3/4" x 8-3/4" x 4-1/8"	1	UL / DLC PRM
ASD-WLS-A60BR-PC	40/50/60	120-277 V	0-10 V	3,000/4,000/5,000	7,706	14" x 9-3/16" x 4-5/16"	1	UL / DLC PRM
ASD-WLS-A80BR-PC	60/70/80	120-277 V	0-10 V	3,000/4,000/5,000	10,239	14" x 9-3/16" x 4-5/16"	1	UL / DLC PRM
ASD-WLS-A120BR-PC	80/100/120	120-277 V	0-10 V	3,000/4,000/5,000	14,376	14" x 9-3/16" x 4-5/16"	1	UL / DLC PRM



LED WALLPACK ROUND

■ ASD-WLR

Model	Light Direction	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-WLR-60BR-PC	1	40/50/60	120-277 V	0-10 V	3,000/4,000/5,000	8,538	10-1/2" x 6-3/4" x 4-1/2"	1	UL / DLC PRM
ASD-WLR-120BR-PC	1	80/100/120	120-277 V	0-10 V	3,000/4,000/5,000	16,716	14" x 8-3/4" x 6-1/16"	1	UL / DLC PRM

ASD-WLR-60BR-PC-UD	2	40/50/60	120-277 V	0-10 V	3,000/4,000/5,000	8,696	10-1/2" x 5-5/8" x 4-1/2"	1	UL / DLC PRM
ASD-WLR-120BR-PC-UD	2	80/100/120	120-277 V	0-10 V	3,000/4,000/5,000	17,000	14" x 7-5/8" x 6-1/16"	1	UL / DLC PRM



LED VAPOR TIGHT JELLY JAR LIGHT

■ ASD-VTJ

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-VTJ-20RGBCW	15"	12/16/20	120-277	0-10V	3,000/5,000/RGB	2,148	Gray	4-15/16" x 4-15/16" x 15-1/16"	6	UL



LED SECURITY FLOODLIGHT RECTANGULAR HEADS

■ ASD-SFL2

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-SFL2-20WH	20	120	No	2,700/3,000/3,500/4,000/5,000	2,156	White	10-1/4" x 4-15/16" x 4-7/16"	8	UL / DLC PRM
ASD-SFL2-20BK	20	120	No	2,700/3,000/3,500/4,000/5,000	2,045	Black	10-1/4" x 4-15/16" x 4-7/16"	8	UL / DLC PRM



LED SECURITY FLOODLIGHT WITH MOTION SENSOR

■ ASD-SFL

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-SFL-20WH	20	120	No	2,700/3,000/3,500/4,000/5,000	2,204	White	10-1/4" x 4-7/16" x 6-13/16"	8	UL / DLC PRM
ASD-SFL-20BK	20	120	No	2,700/3,000/3,500/4,000/5,000	2,045	Black	10-1/4" x 4-7/16" x 6-13/16"	8	UL / DLC PRM



LED SECURITY FLOODLIGHT WITH CAMERA

■ ASD-SFL-SC

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-SFL-20WH-SC	20	120	No	2,700/3,000/3,500/4,000/5,000	2,017	White	10-1/4" x 4-7/16" x 7-11/16"	6	UL / DLC PRM
ASD-SFL-20BK-SC	20	120	No	2,700/3,000/3,500/4,000/5,000	2,017	Black	10-1/4" x 4-7/16" x 7-11/16"	6	UL / DLC PRM



Q-BASE MOTION SENSOR

Model	Type	Base	Input Voltage	Dimmable	IP	Installation Height	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-M2MW-WH	Microwave	Magnet	12V	0-10 V	IP20	16ft	White	2-9/16" x 13/16" x 5/8"	120	UL
ASD-08MW-WH	Microwave	Audio-jack	12V	0-10 V	IP20	12ft	White	2-5/8" x 3/4" x 1"	120	UL
ASD-09IR-WH	Infrared	3pin	12V	0-10 V	IP65	39ft	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
ASD-09IR-BK	Infrared	3pin	12V	0-10 V	IP65	39ft	Black	2-1/8" x 2-1/8" x 1-11/16"	120	UL
ASD-09IR50-WH	Infrared	3pin	12V	0-10 V	IP65	50ft	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL
ASD-09MW-WH	Microwave	3pin	12V	0-10 V	IP65	49ft	White	2-1/8" x 2-1/8" x 1-5/16"	120	UL
ASD-09MW-BK	Microwave	3pin	12V	0-10 V	IP65	49ft	Black	2-1/8" x 2-1/8" x 1-5/16"	120	UL
ASD-M22IR-WH	Infrared	Clip-in	12V	0-10 V	IP20	13ft	White	1-7/8" x 1-3/16" x 1-3/16"	200	UL
Remote Control for Motion Sensor ASD-06RC								5-11/16" x 1-3/4" x 13/16"	60	-

NLS										
ASD-M2MW-NLS	Microwave	Magnet	12V	1-10 V	IP20	16ft	White	2-5/8" x 13/16" x 1/2"	120	UL / DLC NLC
ASD-09IR-NLS-WH	Infrared	3pin	12V	0-10 V	IP65	39ft	White	2-1/8" x 2-1/8" x 1-11/16"	120	UL / DLC NLC
ASD-09MW-NLS-WH	Microwave	3pin	12V	0-10 V	IP65	49ft	White	2-1/8" x 2-1/8" x 1-3/8"	120	UL / DLC NLC
ASD-M22IR-NLS-WH	Infrared	Clip-in	12V	0-10 V	IP20	13ft	White	1-7/8" x 1-3/16" x 1-3/16"	200	UL / DLC NLC
Remote Control for Motion Sensor ASD-06RC								5-11/16" x 1-3/4" x 13/16"	60	-
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and EM Battery ASD-G02-NLS								4-1/4" x 5-3/16" x 1-1/16"	4	-

EMERGENCY BATTERY BACK-UP

Model	Watts	Input Voltage	IP	Dimensions LxWxH	Pcs. per Carton	Certification
BLD-HM08D	8	120-277 V	IP20	10-7/16" x 1-15/16" x 15/16"	10	UL
BLD-HM15D	15	120-277 V	IP40	12-15/16" x 1-7/16" x 15/16"	10	UL
ASD-EMA15	15	120-277 V	IP20	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC PRM
ASD-EMK20W-WHB5B	20	120-277 V	IP40	9-5/8" x 4-5/8" x 1-7/8"	10	-
ASD-EMK30W-WHB5A	30	120-277 V	IP40	9-5/8" x 4-5/8" x 1-7/8"	10	-
BLD-RM40R	40	120-277 V	IP65	15-11/16" x 15-11/16" x 5-9/16"	4	UL
ASD-EMB40	40	120-277 V	IP65	8-3/8" x 5-3/16" x 4-13/16"	6	UL / DLC PRM
BLD-RM60R	60	120-277 V	IP65	15-11/16" x 5-3/4" x 5-3/4"	4	UL
ASD-EMB60	60	120-277 V	IP65	8-3/8" x 5-3/16" x 4-13/16"	6	UL / DLC PRM
BLD-GM60R-HV	60	277-480 V	IP65	14-1/2" x 3-1/16" x 1-7/8"	5	UL
Remote Test Switch for Battery Back-up RN1				5-1/8" x 1-1/4" x 5/8"	50	-

NLS						
ASD-EMA15-NLS	15	120-277 V	IP20	14-5/8" x 1-5/8" x 1-7/16"	10	UL / DLC NLC
ASD-EMB40-NLS	40	120-277 V	IP20	8-3/8" x 5-3/16" x 4-13/16"	6	UL / DLC NLC
NLS Gateway (Bluetooth, ZigBee, WiFi) for NLS Sensors and EM Battery ASD-G02-NLS				4-1/4" x 5-3/16" x 1-1/16"	4	-

LED FLUSHMOUNT LOFT

■ ASD-LOFT-FM, ASD-LOFT-FM-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LOFT-FM-12D20BK	12"	20	120	Triac	2,700/3,000/3,500/4,000/5,000	1,130	Black	11-13/16" x 3-1/2"	4	ETL
ASD-LOFT-FM-12D20NK	12"	20	120	Triac	2,700/3,000/3,500/4,000/5,000	1,130	Nickel	11-13/16" x 3-1/2"	4	ETL
ASD-LOFT-FM-14D24BK	14"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	1,534	Black	14" x 3-3/4"	4	ETL
ASD-LOFT-FM-14D24NK	14"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	1,534	Nickel	14" x 3-3/4"	4	ETL
ASD-LOFT-FM-16D28BK	16"	28	120	Triac	2,700/3,000/3,500/4,000/5,000	1,752	Black	15-5/16" x 3-11/16"	4	ETL
ASD-LOFT-FM-16D28NK	16"	28	120	Triac	2,700/3,000/3,500/4,000/5,000	1,752	Nickel	15-5/16" x 3-11/16"	4	ETL
ASD-LOFT-FM-18D35BK	18"	35	120	Triac	2,700/3,000/3,500/4,000/5,000	1,992	Black	17-15/16" x 3-15/16"	2	ETL
ASD-LOFT-FM-18D35NK	18"	35	120	Triac	2,700/3,000/3,500/4,000/5,000	1,992	Nickel	17-15/16" x 3-15/16"	2	ETL
ASD-LOFT-FM-20D42BK	20"	42	120	Triac	2,700/3,000/3,500/4,000/5,000	2,475	Black	19-1/8" x 4-1/8"	2	ETL
ASD-LOFT-FM-20D42NK	20"	42	120	Triac	2,700/3,000/3,500/4,000/5,000	2,475	Nickel	19-1/8" x 4-1/8"	2	ETL

WITH RGBW										
ASD-LOFT-FM-12D20SM-RGBW-BK	12"	20	120	SMART APP + RC	2,700-6,500 + RGBW	1,220	Black	11-5/16" x 3-3/8"	4	ETL
ASD-LOFT-FM-12D20SM-RGBW-NK	12"	20	120	SMART APP + RC	2,700-6,500 + RGBW	1,220	Nickel	11-5/16" x 3-3/8"	4	ETL
ASD-LOFT-FM-16D28SM-RGBW-BK	16"	28	120	SMART APP + RC	2,700-6,500 + RGBW	1,681	Black	15-5/16" x 3-11/16"	4	ETL
ASD-LOFT-FM-16D28SM-RGBW-NK	16"	28	120	SMART APP + RC	2,700-6,500 + RGBW	1,681	Nickel	15-5/16" x 3-11/16"	4	ETL
ASD-LOFT-FM-20D42SM-RGBW-BK	20"	42	120	SMART APP + RC	2,700-6,500 + RGBW	2,882	Black	19-1/8" x 4-1/8"	2	ETL
ASD-LOFT-FM-20D42SM-RGBW-NK	20"	42	120	SMART APP + RC	2,700-6,500 + RGBW	2,882	Nickel	19-1/8" x 4-1/8"	2	ETL



LED DOUBLE RING FLUSHMOUNT

■ ASD-LFMDR, ASD-LFMDR-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LFMDR-10D16CC-BK	10"	16	120	Triac	3,000/4,000/5,000	1,041	Black	10-5/16" x 3-1/2"	4	ETL
ASD-LFMDR-10D16CC-NK	10"	16	120	Triac	3,000/4,000/5,000	1,041	Nickel	10-5/16" x 3-1/2"	4	ETL
ASD-LFMDR-12D20CC-BK	12"	20	120	Triac	3,000/4,000/5,000	1,532	Black	11-13/16" x 3-1/8"	4	ETL
ASD-LFMDR-12D20CC-NK	12"	20	120	Triac	3,000/4,000/5,000	1,532	Nickel	11-13/16" x 3-1/8"	4	ETL
ASD-LFMDR-14D21CC-BK	14"	21	120	Triac	3,000/4,000/5,000	1,675	Black	14" x 3-9/16"	4	ETL
ASD-LFMDR-14D21CC-NK	14"	21	120	Triac	3,000/4,000/5,000	1,675	Nickel	14" x 3-9/16"	4	ETL
ASD-LFMDR-16D24CC-BK	16"	24	120	Triac	3,000/4,000/5,000	1,854	Black	15-3/4" x 3-3/4"	2	ETL
ASD-LFMDR-16D24CC-BZ	16"	24	120	Triac	3,000/4,000/5,000	1,854	Oil Rubbed Bronze	15-3/4" x 3-3/4"	2	ETL
ASD-LFMDR-16D24CC-NK	16"	24	120	Triac	3,000/4,000/5,000	1,854	Nickel	15-3/4" x 3-3/4"	2	ETL
ASD-LFMDR-18D28CC-BK	18"	28	120	Triac	3,000/4,000/5,000	2,230	Black	17-11/16" x 4-1/16"	2	ETL
ASD-LFMDR-18D28CC-BZ	18"	28	120	Triac	3,000/4,000/5,000	2,230	Oil Rubbed Bronze	17-11/16" x 4-1/16"	2	ETL
ASD-LFMDR-18D28CC-NK	18"	28	120	Triac	3,000/4,000/5,000	2,230	Nickel	17-11/16" x 4-1/16"	2	ETL

120-277V										
ASD-LFMDR-MV-12D20CC-NK	12"	20	120-277	Triac	3,000/4,000/5,000	1,580	Nickel	11-13/16" x 3-1/8"	4	ETL
ASD-LFMDR-MV-14D21CC-NK	14"	21	120-277	Triac	3,000/4,000/5,000	1,725	Nickel	14" x 3-9/16"	4	ETL
ASD-LFMDR-MV-16D24CC-NK	16"	24	120-277	Triac	3,000/4,000/5,000	2,118	Nickel	15-3/4" x 3-3/4"	2	ETL
ASD-LFMDR-MV-18D28CC-NK	18"	28	120-277	Triac	3,000/4,000/5,000	2,744	Nickel	17-11/16" x 4-1/16"	2	ETL

120-277V WITH BATTERY BACK-UP										
ASD-LFMDR-MV-12D20CC-EM-NK	12"	20	120-277	Triac	3,000/4,000/5,000	1,580	Nickel	11-13/16" x 4-5/16"	4	ETL
ASD-LFMDR-MV-14D21CC-EM-NK	14"	21	120-277	Triac	3,000/4,000/5,000	1,854	Nickel	13-3/4" x 4-11/16"	4	ETL
ASD-LFMDR-MV-16D24CC-EM-NK	16"	24	120-277	Triac	3,000/4,000/5,000	2,116	Nickel	15-3/4" x 4-3/4"	4	ETL

WITH RGBW										
ASD-LFMDR-14D21SM-RGBW-NK	14"	21	120	SMART APP + RC	2,700-6,500 + RGBW	1,429	Nickel	13-3/4" x 3-9/16"	4	ETL
ASD-LFMDR-16D24SM-RGBW-NK	16"	24	120	SMART APP + RC	2,700-6,500 + RGBW	1,575	Nickel	15-3/4" x 3-7/8"	2	ETL
ASD-LFMDR-18D28SM-RGBW-NK	18"	28	120	SMART APP + RC	2,700-6,500 + RGBW	1,844	Nickel	17-11/16" x 4-1/16"	2	ETL

LED OVAL DOUBLE RING FLUSHMOUNT

■ ASD-FMOV, ASD-LFMOV

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-FMOV-24D38BK	24"	38	120	Triac	2,700/3,000/3,500/4,000/5,000	3,289	Black	24" x 13-9/16" x 4-5/16"	2	ETL
ASD-FMOV-24D38NK	24"	38	120	Triac	2,700/3,000/3,500/4,000/5,000	3,289	Nickel	24" x 13-9/16" x 4-5/16"	2	ETL
ASD-FMOV-32D50BK	32"	50	120	Triac	2,700/3,000/3,500/4,000/5,000	4,195	Black	32-5/16" x 18-1/8" x 4-5/16"	2	ETL
ASD-FMOV-32D50NK	32"	50	120	Triac	2,700/3,000/3,500/4,000/5,000	4,195	Nickel	32-5/16" x 18-1/8" x 4-5/16"	2	ETL

120-277V										
ASD-LFMOV-MV-32D45CC-BK	32"	45	120-277	Triac	3,000/4,000/5,000	3,750	Black	32-7/16" x 18-1/8" x 4-13/16"	2	ETL
ASD-LFMOV-MV-32D45CC-BZ	32"	45	120-277	Triac	3,000/4,000/5,000	3,750	Bronze	32-7/16" x 18-1/8" x 4-13/16"	2	ETL
ASD-LFMOV-MV-32D45CC-NK	32"	45	120-277	Triac	3,000/4,000/5,000	3,750	Nickel	32-7/16" x 18-1/8" x 4-13/16"	2	ETL

LED OVAL SURFACE MINI PANEL

■ ASD-MPO

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Location	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-MPO-32D45WH	32"	45	120-277	Triac	2,700/3,000/4,000/5,000/6,000	4,500	Wet	White	31-7/8" x 17-13/16" x 1-3/16"	2	ETL

LED SQUARE SURFACE MINI PANEL

■ ASD-MPS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Location	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-MPS-5D10CC-BK-6PACK	5"	10	120	Triac	3,000/4,000/5,000	744	Damp	Black	5-5/16" x 5-5/16" x 1-1/8"	2	ETL
ASD-MPS-5D10CC-WH-6PACK	5"	10	120	Triac	3,000/4,000/5,000	744	Damp	White	5-5/16" x 5-5/16" x 1-1/8"	2	ETL
ASD-MPS-7D15CC-BK-6PACK	7"	15	120	Triac	3,000/4,000/5,000	1,094	Damp	Black	7-1/16" x 7-1/16" x 1-1/8"	2	ETL
ASD-MPS-7D15CC-WH-6PACK	7"	15	120	Triac	3,000/4,000/5,000	1,094	Damp	White	7-1/16" x 7-1/16" x 1-1/8"	2	ETL
ASD-MPS-9D18CC-BK-6PACK	9"	18	120	Triac	3,000/4,000/5,000	1,452	Damp	Black	8-7/8" x 8-7/8" x 1-1/8"	2	ETL
ASD-MPS-9D18CC-WH-6PACK	9"	18	120	Triac	3,000/4,000/5,000	1,452	Damp	White	8-7/8" x 8-7/8" x 1-1/8"	2	ETL
ASD-MPS-12D24BK	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	1,731	Damp	Black	11-13/16" x 11-13/16" x 1-1/8"	4	ETL
ASD-MPS-12D24WH	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	1,731	Damp	White	11-13/16" x 11-13/16" x 1-1/8"	4	ETL



LED ROUND SURFACE MINI PANEL

■ ASD-MPR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Location	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-MPR-5D10BK	5"	10	120	Triac	2,700/3,000/4,000/5,000/6,000	692	Wet	Black	5-5/16" x 1"	6	ETL
ASD-MPR-5D10WH	5"	10	120	Triac	2,700/3,000/4,000/5,000/6,000	692	Wet	White	5-5/16" x 1"	6	ETL
ASD-MPR-7D15BK	7"	15	120	Triac	2,700/3,000/4,000/5,000/6,000	1,262	Wet	Black	7-1/16" x 1"	6	ETL
ASD-MPR-7D15NK	7"	15	120	Triac	2,700/3,000/4,000/5,000/6,000	1,262	Wet	Nickel	7-1/16" x 1"	6	ETL
ASD-MPR-7D15WH	7"	15	120	Triac	2,700/3,000/4,000/5,000/6,000	1,262	Wet	White	7-1/16" x 1"	6	ETL
ASD-MPR-9D18BK	9"	18	120	Triac	2,700/3,000/4,000/5,000/6,000	1,664	Wet	Black	8-7/8" x 1-3/4"	6	ETL
ASD-MPR-9D18NK	9"	18	120	Triac	2,700/3,000/4,000/5,000/6,000	1,664	Wet	Nickel	8-7/8" x 1-3/4"	6	ETL
ASD-MPR-9D18WH	9"	18	120	Triac	2,700/3,000/4,000/5,000/6,000	1,664	Wet	White	8-7/8" x 1-3/4"	6	ETL
ASD-MPR-12D24BK	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	2,145	Wet	Black	11-13/16" x 1"	4	ETL
ASD-MPR-12D24NK	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	2,145	Wet	Nickel	11-13/16" x 1"	4	ETL
ASD-MPR-12D24WH	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	2,145	Wet	White	11-13/16" x 1"	4	ETL

120-277V											
ASD-MPR-MV-12D24BK	12"	24	120-277	Triac	2,700/3,000/4,000/5,000/6,000	2,069	Damp	Black	11-15/16" x 1"	4	ETL
ASD-MPR-MV-12D24WH	12"	24	120-277	Triac	2,700/3,000/4,000/5,000/6,000	2,069	Damp	White	11-15/16" x 1"	4	ETL
ASD-MPR-15D28WH	15"	28	120-277	Triac	2,700/3,000/4,000/5,000/6,000	2,373	Wet	White	14-15/16" x 1-3/16"	2	ETL
ASD-MPR-18D32WH	18"	32	120-277	Triac	2,700/3,000/4,000/5,000/6,000	2,687	Wet	White	17-15/16" x 1-3/16"	2	ETL
ASD-MPR-24D38WH	24"	38	120-277	Triac	2,700/3,000/4,000/5,000/6,000	2,760	Wet	White	24" x 1-3/16"	2	ETL
ASD-MPR-32D45WH	32"	45	120-277	Triac	2,700/3,000/4,000/5,000/6,000	3,902	Wet	White	31-15/16" x 1-3/16"	2	ETL

WITH MOTION SENSOR											
ASD-MPR-7N15WH-MS	7"	15	120	No	2,700/3,000/4,000/5,000/6,000	905	Damp	White	7-1/16" x 7/8"	12	ETL
ASD-MPR-9N18WH-MS	9"	18	120	No	2,700/3,000/4,000/5,000/6,000	1,333	Damp	White	8-3/4" x 7/8"	12	ETL

WITH BATTERY BACK-UP											
ASD-MPR-7D15WH-EM	7"	15	120	Triac	2,700/3,000/4,000/5,000/6,000	1,267	Damp	White	7-1/16" x 1-3/4"	12	ETL
ASD-MPR-9D18WH-EM	9"	18	120	Triac	2,700/3,000/4,000/5,000/6,000	1,664	Damp	White	8-7/8" x 1-3/4"	12	ETL
ASD-MPR-12D24WH-EM	12"	24	120	Triac	2,700/3,000/4,000/5,000/6,000	1,800	Damp	White	12" x 11/16"	6	ETL

ACCESSORIES											
Sub-plate for 7"					ASD-SP7-MPR-WH			White	7-1/16" x 1-3/4"	12	
Sub-plate for 9"					ASD-SP9-MPR-WH			White	8-7/8" x 1-1/4"	12	
Retrofit Kit with E26 base and TP24 connector for 5"					ASD-RK4-MPR			-	-	48	
Retrofit Kit with E26 base and TP24 connector for 7/9/12"					ASD-RK6-MPR			-	-	48	
Hanging mounting set for 15/18"					ASD-HS15-MPR-WH			White	-	4	



LED DISK LIGHT

■ ASD-LDS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LDS-4D10BK	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	820	Black	5-7/8" x 7/8"	6	ETL / UL / Energy Star
ASD-LDS-4D10AC-BK-12PACK	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	820	Black	5-7/8" x 7/8"	1	ETL / UL / Energy Star
ASD-LDS-4D10WH	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	820	White	5-7/8" x 7/8"	6	ETL / UL / Energy Star
ASD-LDS-4D10AC-WH-12PACK	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	820	White	5-7/8" x 7/8"	1	ETL / UL / Energy Star
ASD-LDS-6D15BK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Black	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15MB	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Matte Black	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15AC-BK-12PACK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Black	7-5/16" x 15/16"	1	ETL / UL / Energy Star
ASD-LDS-6D15BR	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Bronze	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15NK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Nickel	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15WH	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	White	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15MW	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	Matte White	7-5/16" x 15/16"	6	ETL / UL / Energy Star
ASD-LDS-6D15AC-WH-12PACK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,245	White	7-5/16" x 15/16"	1	ETL / UL / Energy Star

WITH MOTION SENSOR											
ASD-LDS-6N15WH-MS	6"	15	120	No	2,700/3,000/3,500/4,000/5,000	1,149	White	7-5/16" x 1-1/4"	6		UL

ACCESSORIES											
Retrofit Kit with E26 base and TP24 connector for 4"					ASD-RK4-LDS-6PACK					8	
Retrofit Kit with E26 base and TP24 connector for 6"					ASD-RK6-LDS-6PACK					8	



LED ROUND RECESSED MINI PANEL

■ ASD-JBR, ASD-JBR-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-JBR-3D6AC-BK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	Black	3-1/4" x 5/8"	6	UL
ASD-JBR-3D6AC-BK-12PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	Black	3-1/4" x 5/8"	1	UL
ASD-JBR-3D6AC-BR	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	Bronze	3-1/4" x 5/8"	6	UL
ASD-JBR-3D6AC-NK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	Nickel	3-1/4" x 5/8"	6	UL
ASD-JBR-3D6AC-WH	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	White	3-1/4" x 5/8"	6	UL
ASD-JBR-3D6AC-WH-12PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	460	White	3-1/4" x 5/8"	1	UL
ASD-JBR-4D9BK-6P	4"	9	120	Triac	2,700/3,000/3,500/4,000/5,000	738	Black	4-15/16" x 7/8"	1	UL / Energy Star
ASD-JBR-4D9WH-6P	4"	9	120	Triac	2,700/3,000/3,500/4,000/5,000	738	White	4-15/16" x 7/8"	1	UL / Energy Star
ASD-JBR-4D9WH-12P	4"	9	120	Triac	2,700/3,000/3,500/4,000/5,000	738	White	4-15/16" x 7/8"	1	UL / Energy Star

ASD-JBR-4D12AC-BK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	893	Black	4-11/16" x 5/8"	6	UL
ASD-JBR-4D12AC-BK-12PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	893	Black	4-11/16" x 5/8"	1	UL
ASD-JBR-4D12AC-BR	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	893	Bronze	4-11/16" x 5/8"	6	UL
ASD-JBR-4D12AC-WH	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	893	White	4-11/16" x 5/8"	6	UL
ASD-JBR-4D12AC-WH-12PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	893	White	4-11/16" x 5/8"	1	UL
ASD-JBR-6D12BK-6P	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	984	Black	6-7/8" x 15/16"	1	ETL / Energy Star
ASD-JBR-6D12WH-6P	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	984	White	6-7/8" x 15/16"	1	ETL / Energy Star
ASD-JBR-6D12WH-12P	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	984	White	6-7/8" x 15/16"	1	ETL / Energy Star

ASD-JBR-6D15AC-BK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	Black	6-5/8" x 5/8"	6	UL
ASD-JBR-6D15AC-BK-6PACK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	Black	6-5/8" x 5/8"	2	UL
ASD-JBR-6D15AC-BK-12PACK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	Black	6-5/8" x 5/8"	1	UL
ASD-JBR-6D15AC-BR	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	Bronze	6-5/8" x 5/8"	6	UL
ASD-JBR-6D15AC-WH	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	White	6-5/8" x 5/8"	6	UL
ASD-JBR-6D15AC-WH-12PACK	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	White	6-5/8" x 5/8"	1	UL

ASD-JBR-8D20AC-BK	8"	20	120	Triac	2,700/3,000/3,500/4,000/5,000	1,746	Black	8-11/16" x 5/8"	4	UL
ASD-JBR-8D20AC-WH	8"	20	120	Triac	2,700/3,000/3,500/4,000/5,000	1,746	White	8-11/16" x 5/8"	4	UL

ASD-JBR-12D24AC-BK	12"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,169	Black	11-5/8" x 5/8"	4	UL
ASD-JBR-12D24AC-WH	12"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,169	White	11-5/8" x 5/8"	4	UL

WITH BATTERY BACK-UP											
ASD-JBR-6D15WH-EM	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,225	White	6-5/8" x 3/4"	2		ETL

WITH RGBW											
ASD-JBR-6D15SM-RGBW-WH	6"	15	120	SMART APP	2,700-6,500 + RGBW	1,135	White	7-11/16" x 6-3/4 x 1-1/4"	6		ETL


ACCESSORIES											
Extension Cord 3PIN 10"					ASD-EC-10A-6PACK			White	10"	10	UL
Extension Cord 3PIN 20"					ASD-EC-20A-6PACK			White	20"	10	UL



LED SQUARE RECESSED MINI PANEL

■ ASD-JBS, ASD-JBSR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-JBS-3D6AC-BK-6PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	456	Black	3-1/4" x 3-1/4" x 9/16"	2	UL
ASD-JBS-3D6AC-BZ-6PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	456	Bronze	3-1/4" x 3-1/4" x 9/16"	2	UL
ASD-JBS-3D6AC-NK-6PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	456	Nickel	3-1/4" x 3-1/4" x 9/16"	2	UL
ASD-JBS-3D6AC-WH-6PACK	3"	6	120	Triac	2,700/3,000/3,500/4,000/5,000	456	White	3-1/4" x 3-1/4" x 9/16"	2	UL
ASD-JBS-4D12AC-BK-6PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	784	Black	4-5/8" x 4-5/8" x 9/16"	2	UL
ASD-JBS-4D12AC-BZ-6PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	784	Bronze	4-5/8" x 4-5/8" x 9/16"	2	UL
ASD-JBS-4D12AC-NK-6PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	784	Nickel	4-5/8" x 4-5/8" x 9/16"	2	UL
ASD-JBS-4D12AC-WH-6PACK	4"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	784	White	4-5/8" x 4-5/8" x 9/16"	2	UL

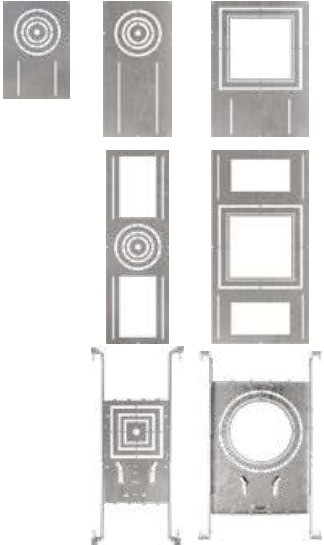

NEW CONSTRUCTION MOUNTING PLATE

■ ASD-MPL-FA, ASD-MPL-FS, ASD-MPL-SC

Description	Model	Holes	Size	Dimensions LxWxH	Pcs. per Carton
New Construction Flat Mounting Plate with Asymmetric holes	ASD-MPLR-346-FA-6PACK	Round	3-4-6"	13-1/4" x 9-1/16" x 1/16"	4
New Construction Flat Mounting Plate with Asymmetric holes	ASD-MPLR18-346-FA-6PACK	Round	3-4-6"	18" x 9-1/16" x 1/16"	4
New Construction Flat Mounting Plate with Asymmetric holes	ASD-MPLR-81012-FA-6PACK	Round	8-10-12"	18-1/2" x 13-3/8" x 1/16"	4
New Construction Flat Mounting Plate with Asymmetric holes	ASD-MPLS-346-FA-6PACK	Square	3-4-6"	13-1/4" x 9-1/16" x 1/16"	4
New Construction Flat Mounting Plate with Asymmetric holes	ASD-MPLS-81012-FA-6PACK	Square	8-10-12"	18-1/2" x 13-3/8" x 1/16"	4
New Construction Flat Mounting Plate with Symmetric holes	ASD-MPLR-346-FS-6PACK	Round	3-4-6"	26" x 8-1/4" x 1/16"	4
New Construction Flat Mounting Plate with Symmetric holes	ASD-MPLR-81012-FS-6PACK	Round	8-10-12"	26" x 13" x 1/16"	4
New Construction Flat Mounting Plate with Symmetric holes	ASD-MPLS-346-FS-6PACK	Square	3-4-6"	26" x 8-1/4" x 1/16"	4
New Construction Flat Mounting Plate with Symmetric holes	ASD-MPLS-81012-FS-6PACK	Square	8-10-12"	26" x 13" x 1/16"	4
New Construction Mounting Plate with holes and Sliding Clips	ASD-MPLR-346-SC-6PACK	Round	3-4-6"	14-3/8" x 10-9/16" x 1-5/8"	2
New Construction Mounting Plate with holes and Sliding Clips	ASD-MPLR-81012-SC-6PACK	Round	8-10-12"	17-11/16" x 13" x 1-9/16"	2
New Construction Mounting Plate with holes and Sliding Clips	ASD-MPLS-346-SC-6PACK	Square	3-4-6"	14-3/8" x 10-9/16" x 1-5/8"	2
New Construction Mounting Plate with holes and Sliding Clips	ASD-MPLS-81012-SC-6PACK	Square	8-10-12"	17-11/16" x 13" x 1-9/16"	2



LED ROUND DOWNLIGHT RETROFIT KIT

■ ASD-LRKR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LRKR-4D9AC-BK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	Black	5-1/16" x 2"	6	UL
ASD-LRKR-4D9AC-BK-12PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	Black	5-1/16" x 2"	1	UL
ASD-LRKR-4D9AC-BR	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	Bronze	5-1/16" x 2"	6	UL
ASD-LRKR-4D9AC-BR-12PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	Bronze	5-1/16" x 2"	1	UL
ASD-LRKR-4D9AC-WH	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	White	5-1/16" x 2"	6	UL
ASD-LRKR-4D9AC-WH-12PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	702	White	5-1/16" x 2"	1	UL
ASD-LRKR-6D12AC-BK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	Black	7-5/16" x 3-7/16"	6	UL
ASD-LRKR-6D12AC-BK-12PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	Black	7-5/16" x 3-7/16"	1	UL
ASD-LRKR-6D12AC-BR	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	Bronze	7-5/16" x 3-7/16"	6	UL
ASD-LRKR-6D12AC-BR-12PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	Bronze	7-5/16" x 3-7/16"	1	UL
ASD-LRKR-6D12AC-WH	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	White	7-5/16" x 3-7/16"	6	UL
ASD-LRKR-6D12AC-WH-12PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,009	White	7-5/16" x 3-7/16"	1	UL



LED SQUARE DOWNLIGHT RETROFIT KIT

■ ASD-LRKS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LRKS-4D9AC-BK-6PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	709	Black	5" x 5" x 2-1/16"	2	UL
ASD-LRKS-4D9AC-BZ-6PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	709	Bronze	5" x 5" x 2-1/16"	2	UL
ASD-LRKS-4D9AC-WH-6PACK	4"	8.6	120	Triac	2,700/3,000/3,500/4,000/5,000	709	White	5" x 5" x 2-1/16"	2	UL
ASD-LRKS-6D12AC-BK-6PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,023	Black	7-5/16" x 7-5/16" x 1-7/8"	2	UL
ASD-LRKS-6D12AC-BZ-6PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,023	Bronze	7-5/16" x 7-5/16" x 1-7/8"	2	UL
ASD-LRKS-6D12AC-WH-6PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,023	White	7-5/16" x 7-5/16" x 1-7/8"	2	UL



LED ROUND DOWNLIGHT RETROFIT KIT GIMBAL

■ ASD-LRK-GB

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LRK-GB-4D10BR	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	811	Bronze	5-1/2" x 5-1/2" x 2-1/8"	6	ETL
ASD-LRK-GB-4D10WH	4"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	811	White	5-1/2" x 5-1/2" x 2-1/8"	6	ETL
ASD-LRK-GB-6D15BR	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,236	Bronze	7-1/2" x 7-1/2" x 2-1/8"	6	ETL
ASD-LRK-GB-6D15WH	6"	15	120	Triac	2,700/3,000/3,500/4,000/5,000	1,236	White	7-1/2" x 7-1/2" x 2-1/8"	6	ETL



LED FLAT DOWNLIGHT RETROFIT KIT ROUND

■ ASD-LRKR-F


Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LRKR-F6D12BK-12PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	971	Black	7-3/16" x 1-1/4"	1	ETL
ASD-LRKR-F6D12WH-12PACK	6"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,021	White	7-3/16" x 1-1/4"	1	ETL



LED VANITY LINEAR LOFT

■ ASD-LOFT-VF

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LOFT-VF-24D25NK	24"	25	120	Triac	2,700/3,000/3,500/4,000/5,000	1,939	Nickel	25-1/2" x 5-1/4" x 3-11/16"	4	ETL
ASD-LOFT-VF-36D30NK	36"	30	120	Triac	2,700/3,000/3,500/4,000/5,000	2,515	Nickel	37-1/16" x 5-1/4" x 3-11/16"	2	ETL
ASD-LOFT-VF-48D35NK	48"	35	120	Triac	2,700/3,000/3,500/4,000/5,000	3,098	Nickel	49" x 5-1/4" x 3-11/16"	2	ETL

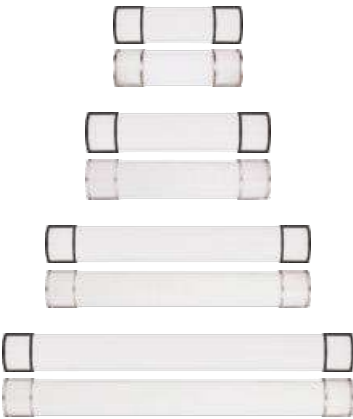

LED VANITY LINEAR

■ ASD-LVF21

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LVF21-18D20CC-BK	18"	20	120	Triac	3,000/4,000/5,000	1,620	Black	19-1/8" x 5-7/8" x 4"	4	ETL
ASD-LVF21-18D20CC-NK	18"	20	120	Triac	3,000/4,000/5,000	1,620	Nickel	19-1/8" x 5-7/8" x 4"	4	ETL
ASD-LVF21-18D20CC-NK-2PACK	18"	20	120	Triac	3,000/4,000/5,000	1,620	Nickel	19-1/8" x 5-7/8" x 4"	2	ETL
ASD-LVF21-24D25CC-BK	24"	25	120	Triac	3,000/4,000/5,000	1,950	Black	25-9/16" x 5-7/8" x 4"	4	ETL
ASD-LVF21-24D25CC-NK	24"	25	120	Triac	3,000/4,000/5,000	1,950	Nickel	25-9/16" x 5-7/8" x 4"	4	ETL
ASD-LVF21-24D25CC-NK-2PACK	24"	25	120	Triac	3,000/4,000/5,000	1,950	Nickel	25-9/16" x 5-7/8" x 4"	1	ETL
ASD-LVF21-36D30CC-BK	36"	30	120	Triac	3,000/4,000/5,000	2,640	Black	37-3/16" x 5-7/8" x 4"	2	ETL
ASD-LVF21-36D30CC-NK	36"	30	120	Triac	3,000/4,000/5,000	2,640	Nickel	37-3/16" x 5-7/8" x 4"	2	ETL
ASD-LVF21-48D35CC-BK	48"	35	120	Triac	3,000/4,000/5,000	3,205	Black	49" x 5-7/8" x 4"	2	ETL
ASD-LVF21-48D35CC-NK	48"	35	120	Triac	3,000/4,000/5,000	3,205	Nickel	49" x 5-7/8" x 4"	2	ETL

120-277V										
ASD-LVF21-MV-18D20NK	18"	20	120-277	Triac	3,000/4,000/5,000	2,259	Nickel	19-1/8" x 5-7/8" x 4"	4	ETL
ASD-LVF21-MV-24D25NK	24"	25	120-277	Triac	3,000/4,000/5,000	2,598	Nickel	25-9/16" x 5-7/8" x 4"	4	ETL



LED VANITY LINEAR

■ ASD-LVF22


Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LVF22-18D20CC-NK	18"	20	120	Triac	3,000/4,000/5,000	1,730	Nickel	18-1/16" x 4-1/2" x 4-3/4"	4	ETL
ASD-LVF22-24D25CC-NK	24"	25	120	Triac	3,000/4,000/5,000	2,105	Nickel	24-3/8" x 4-1/2" x 4-3/4"	4	ETL



LED VANITY LINEAR

■ ASD-LVF23

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LVF23-18D20CC-BK	18"	20	120	Triac	3,000/4,000/5,000	1,789	Black	18" x 4-1/2" x 3"	4	ETL
ASD-LVF23-18D20CC-NK	18"	20	120	Triac	3,000/4,000/5,000	1,789	Nickel	18" x 4-1/2" x 3"	4	ETL
ASD-LVF23-24D25CC-BK	24"	25	120	Triac	3,000/4,000/5,000	2,574	Black	24" x 4-1/2" x 3"	4	ETL
ASD-LVF23-24D25CC-NK	24"	25	120	Triac	3,000/4,000/5,000	2,574	Nickel	24" x 4-1/2" x 3"	4	ETL
ASD-LVF23-36D30CC-BK	36"	30	120	Triac	3,000/4,000/5,000	3,141	Black	36" x 4-1/2" x 3"	4	ETL
ASD-LVF23-36D30CC-NK	36"	30	120	Triac	3,000/4,000/5,000	3,141	Nickel	36" x 4-1/2" x 3"	4	ETL
ASD-LVF23-48D35CC-BK	48"	35	120	Triac	3,000/4,000/5,000	3,812	Black	47-5/16" x 4-1/2" x 3"	4	ETL
ASD-LVF23-48D35CC-NK	48"	35	120	Triac	3,000/4,000/5,000	3,812	Nickel	47-5/16" x 4-1/2" x 3"	4	ETL

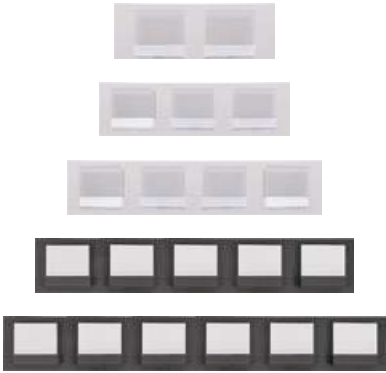

LED VANITY LIGHT

■ ASD-LVF24M

Model	Number of lights	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LVF24M-2D12CC-BK	2	12	120	Triac	3,000/4,000/5,000	652	Black	15" x 5-1/8" x 3-3/16"	4	ETL
ASD-LVF24M-2D12CC-CH	2	12	120	Triac	3,000/4,000/5,000	652	Chrome	15" x 5-1/8" x 3-3/16"	4	ETL
ASD-LVF24M-3D15CC-BK	3	15	120	Triac	3,000/4,000/5,000	843	Black	18-1/8" x 5-1/8" x 3-3/16"	4	ETL
ASD-LVF24M-3D15CC-CH	3	15	120	Triac	3,000/4,000/5,000	843	Chrome	18-1/8" x 5-1/8" x 3-3/16"	4	ETL
ASD-LVF24M-4D23CC-BK	4	23	120	Triac	3,000/4,000/5,000	1,297	Black	24" x 5-1/8" x 3-3/16"	2	ETL
ASD-LVF24M-4D23CC-CH	4	23	120	Triac	3,000/4,000/5,000	1,297	Chrome	24" x 5-1/8" x 3-3/16"	2	ETL
ASD-LVF24M-5D28CC-BK	5	28	120	Triac	3,000/4,000/5,000	1,604	Black	29-15/16" x 5-1/8" x 3-3/16"	2	ETL
ASD-LVF24M-5D28CC-CH	5	28	120	Triac	3,000/4,000/5,000	1,604	Chrome	29-15/16" x 5-1/8" x 3-3/16"	2	ETL
ASD-LVF24M-6D35CC-BK	6	35	120	Triac	3,000/4,000/5,000	2,025	Black	36" x 5-1/8" x 3-3/16"	2	ETL
ASD-LVF24M-6D35CC-CH	6	35	120	Triac	3,000/4,000/5,000	2,025	Chrome	36" x 5-1/8" x 3-3/16"	2	ETL



VANITY LIGHT & MINI-PENDANT

■ ASD-VF27, ASD-MP27

Model	Type	Bulb Type	Voltage	Finish	Shade	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-VF27-2I-2660-NK	Vanity Light	2 x E26 60W max	120 V	Nickel	Clear Glass	15-5/16" x 7-7/8" x 10-11/16"	2	ETL
ASD-VF27-3I-2660-NK	Vanity Light	3 x E26 60W max	120 V	Nickel	Clear Glass	22-5/8" x 7-7/8" x 10-11/16"	2	ETL
ASD-VF27-4I-2660-NK	Vanity Light	4 x E26 60W max	120 V	Nickel	Clear Glass	31-1/4" x 7-7/8" x 10-11/16"	2	ETL
ASD-MP27-1I-2660-NK	Mini-Pendant	1 x E26 60W max	120 V	Nickel	Clear Glass	5-1/2" x 5-1/2" x 46-3/4"	4	ETL



VANITY LIGHT & MINI-PENDANT

■ ASD-VF44, ASD-MP44

Model	Type	Bulb Type	Voltage	Finish	Shade	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-VF44-2I-2660-NK	Vanity Light	2 x E26 60W max	120 V	Nickel	Opal Glass	12-5/8" x 6-3/8" x 7-13/16"	6	ETL
ASD-VF44-3I-2660-BK	Vanity Light	3 x E26 60W max	120 V	Black	Opal Glass	20-1/2" x 6-3/8" x 7-13/16"	4	ETL
ASD-VF44-3I-2660-NK	Vanity Light	3 x E26 60W max	120 V	Nickel	Opal Glass	20-1/2" x 6-5/16" x 7-13/16"	4	ETL
ASD-VF44-4I-2660-NK	Vanity Light	4 x E26 60W max	120 V	Nickel	Opal Glass	28-3/8" x 6-3/8" x 7-13/16"	4	ETL
ASD-MP44-1I-2660-BK	Mini-Pendant	1 x E26 60W max	120 V	Black	Opal Glass	4-3/4" x 4-3/4" x 51-3/16"	12	ETL
ASD-MP44-1I-2660-NK	Mini-Pendant	1 x E26 60W max	120 V	Nickel	Opal Glass	4-3/4" x 4-3/4" x 51-3/16"	12	ETL



VANITY LIGHT & MINI-PENDANT

■ ASD-VF45, ASD-MP45

Model	Type	Bulb Type	Voltage	Finish	Shade	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-VF45-2I-2660-NK	Vanity Light	2 x E26 60W max	120 V	Nickel	Opal Glass	12-7/16" x 6-1/8" x 7-9/16"	6	ETL
ASD-VF45-3I-2660-NK	Vanity Light	3 x E26 60W max	120 V	Nickel	Opal Glass	20-1/2" x 6-1/8" x 7-9/16"	4	ETL
ASD-MP45-1I-2660-NK	Mini-Pendant	1 x E26 60W max	120 V	Nickel	Opal Glass	4-3/4" x 4-3/4" x 10-1/4"	12	ETL



LED WALL SCONCE LOFT

■ ASD-LOFT-WS


Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LOFT-WS-12D15BK	12"	15	120 V	Triac	2,700/3,000/3,500/4,000/5,000	1,148	Black	5-1/4" x 3-11/16" x 12-11/16"	4	ETL
ASD-LOFT-WS-12D15NK	12"	15	120 V	Triac	2,700/3,000/3,500/4,000/5,000	1,148	Nickel	5-1/4" x 3-11/16" x 12-11/16"	4	ETL



LED WALL SCONCE

■ ASD-LWS-11

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LWS-11-D15CC-BK	10"	15	120	Triac	3,000/4,000/5,000	1,107	Black	7" x 3-5/16" x 9-13/16"	4	ETL
ASD-LWS-11-D15CC-BZ	10"	15	120	Triac	3,000/4,000/5,000	1,107	Bronze	7" x 3-5/16" x 9-13/16"	4	ETL
ASD-LWS-11-D15CC-NK	10"	15	120	Triac	3,000/4,000/5,000	1,107	Nickel	7" x 3-5/16" x 9-13/16"	4	ETL
ASD-LWS-11-D15CC-NK-2PACK	10"	15	120	Triac	3,000/4,000/5,000	1,107	Nickel	7" x 3-5/16" x 9-13/16"	2	ETL

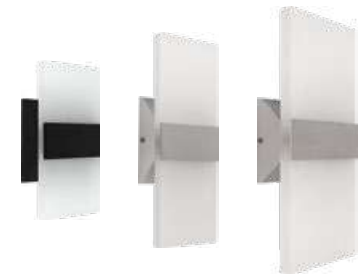

LED WALL SCONCE

■ ASD-LWS12

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LWS12-8D10AC-BK	8"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	611	Black	8-11/16" x 4-3/4" x 1-7/8"	2	ETL
ASD-LWS12-8D10AC-NK	8"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	611	Nickel	8-11/16" x 4-3/4" x 1-7/8"	2	ETL
ASD-LWS12-12D12AC-BK	12"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	861	Black	11-7/16" x 4-3/4" x 1-3/4"	2	UL
ASD-LWS12-12D12AC-NK	12"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	861	Nickel	11-7/16" x 4-3/4" x 1-3/4"	2	UL
ASD-LWS12-14D24AC-BK	14"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	1,848	Black	14-3/16" x 5-7/8" x 2-5/16"	2	ETL
ASD-LWS12-14D24AC-NK	14"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	1,848	Nickel	14-3/16" x 5-7/8" x 2-5/16"	2	ETL



LED UNDER CABINET BULLNOSE

■ ASD-UBN

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UBN-12BR	12"	5	120	Triac	2,700/3,000/3,500/4,000/5,000	443	Bronze	12" x 3-1/2" x 1-1/8"	20	UL
ASD-UBN-12WH	12"	5	120	Triac	2,700/3,000/3,500/4,000/5,000	443	White	12" x 3-1/2" x 1-1/8"	20	UL
ASD-UBN-12WH-2P	12"	5	120	Triac	2,700/3,000/3,500/4,000/5,000	443	White	12" x 3-1/2" x 1-1/8"	10	UL
ASD-UBN-18BR	18"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	807	Bronze	18" x 3-1/2" x 1-1/8"	20	UL
ASD-UBN-18WH	18"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	807	White	18" x 3-1/2" x 1-1/8"	20	UL
ASD-UBN-18WH-2P	18"	10	120	Triac	2,700/3,000/3,500/4,000/5,000	807	White	18" x 3-1/2" x 1-1/8"	10	UL
ASD-UBN-24BR	24"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,051	Bronze	24" x 3-1/2" x 1-1/8"	12	UL
ASD-UBN-24WH	24"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,051	White	24" x 3-1/2" x 1-1/8"	12	UL
ASD-UBN-24WH-2P	24"	12	120	Triac	2,700/3,000/3,500/4,000/5,000	1,051	White	24" x 3-1/2" x 1-1/8"	6	UL
ASD-UBN-32WH	32"	16	120	Triac	2,700/3,000/3,500/4,000/5,000	1,436	White	32-1/4" x 3-1/2" x 1-1/8"	12	UL
ASD-UBN-40WH	40"	20	120	Triac	2,700/3,000/3,500/4,000/5,000	1,814	White	40" x 3-1/2" x 1-1/8"	6	UL
ASD-UBN-48WH	48"	24	120	Triac	2,700/3,000/3,500/4,000/5,000	2,087	White	48-1/16" x 3-1/2" x 1-1/8"	6	UL



LED UNDER CABINET LINEAR

■ ASD-UCL


Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UCL-12D5CC-WH	12"	5	120	Triac	2,700/3,000/4,000	406	White	12" x 3-11/16" x 1"	20	UL
ASD-UCL-18D8CC-WH	18"	8	120	Triac	2,700/3,000/4,000	548	White	18" x 3-11/16" x 1"	20	UL
ASD-UCL-24D12CC-WH	24"	12	120	Triac	2,700/3,000/4,000	874	White	24" x 3-11/16" x 1"	12	UL
ASD-UCL-32D16CC-WH	32"	16	120	Triac	2,700/3,000/4,000	1,131	White	32" x 3-11/16" x 1"	12	UL
ASD-UCL-40D20CC-WH	40"	20	120	Triac	2,700/3,000/4,000	1,532	White	40" x 3-11/16" x 1"	12	UL
ASD-UCL-48D24CC-WH	48"	24	120	Triac	2,700/3,000/4,000	1,781	White	48" x 3-11/16" x 1"	6	UL



LED UNDER CABINET SWIVEL

■ ASD-UCS

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-UCS-12D5CC-BZ	12"	5	120	Triac	2,700/3,000/4,000	396	Bronze	12" x 3-5/8" x 1"	20	UL
ASD-UCS-12D5CC-WH	12"	5	120	Triac	2,700/3,000/4,000	396	White	12" x 3-5/8" x 1"	20	UL
ASD-UCS-18D8CC-BZ	18"	8	120	Triac	2,700/3,000/4,000	613	Bronze	18" x 3-5/8" x 1"	20	UL
ASD-UCS-18D8CC-WH	18"	8	120	Triac	2,700/3,000/4,000	613	White	18" x 3-5/8" x 1"	20	UL
ASD-UCS-24D12CC-BZ	24"	12	120	Triac	2,700/3,000/4,000	933	Bronze	24" x 3-5/8" x 1"	12	UL
ASD-UCS-24D12CC-WH	24"	12	120	Triac	2,700/3,000/4,000	933	White	24" x 3-5/8" x 1"	12	UL
ASD-UCS-32D16CC-BZ	32"	16	120	Triac	2,700/3,000/4,000	1,328	Bronze	31-7/8" x 3-5/8" x 1"	12	UL
ASD-UCS-32D16CC-WH	32"	16	120	Triac	2,700/3,000/4,000	1,328	White	31-7/8" x 3-5/8" x 1"	12	UL
ASD-UCS-40D20CC-WH	40"	20	120	Triac	2,700/3,000/4,000	1,567	White	40-3/16" x 3-5/8" x 1"	6	UL
ASD-UCS-48D24CC-WH	48"	24	120	Triac	2,700/3,000/4,000	1,744	White	48" x 3-5/8" x 1"	6	UL

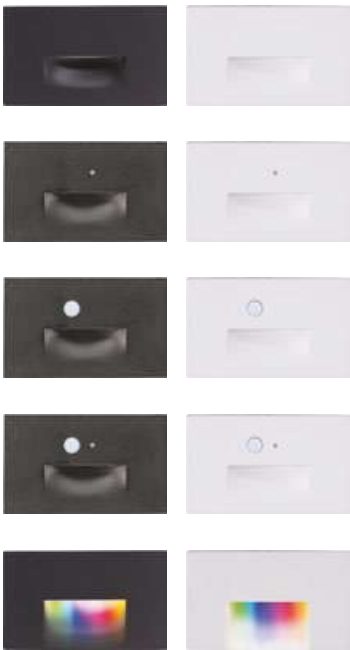

LED STEP LIGHT HORIZONTAL

■ ASD-LSTL, ASD-STLA-RGBW

Model	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LSTL-H01W-D3CC-BK-4PACK	3	120	Triac	3,000/4,000/5,000	114	Black	4-3/4" x 1-9/16" x 2-13/16"	3	ETL
ASD-LSTL-H01W-D3CC-WH-4PACK	3	120	Triac	3,000/4,000/5,000	114	White	4-3/4" x 1-9/16" x 2-13/16"	3	ETL

WITH PHOTOCELL

ASD-LSTL-H01W-N3CC-PC-BK	3	120	No	3,000/4,000/5,000	114	Black	4-3/4" x 1-9/16" x 2-13/16"	4	ETL
ASD-LSTL-H01W-N3CC-PC-WH	3	120	No	3,000/4,000/5,000	114	White	4-3/4" x 1-9/16" x 2-13/16"	4	ETL

WITH MOTION SENSOR

ASD-LSTL-H01W-N3CC-MS-BK	3	120	No	3,000/4,000/5,000	114	Black	4-3/4" x 1-3/4" x 2-13/16"	4	ETL
ASD-LSTL-H01W-N3CC-MS-WH	3	120	No	3,000/4,000/5,000	114	White	4-3/4" x 1-3/4" x 2-13/16"	4	ETL

WITH PHOTOCELL & MOTION SENSOR

ASD-LSTL-H01W-N3CC-PC-MS-BK	3	120	No	3,000/4,000/5,000	114	Black	4-3/4" x 1-3/4" x 2-13/16"	4	ETL
ASD-LSTL-H01W-N3CC-PC-MS-WH	3	120	No	3,000/4,000/5,000	114	White	4-3/4" x 1-3/4" x 2-13/16"	4	ETL

WITH RGBW

ASD-STLA-3SM-RGBW-BK-6P	3	120	SMART APP	2,700 – 6,500 + RGBW	114	Black	4-3/4" x 1-9/16" x 2-13/16"	4	ETL
ASD-STLA-3SM-RGBW-WH-6P	3	120	SMART APP	2,700 – 6,500 + RGBW	114	White	4-3/4" x 1-9/16" x 2-13/16"	4	ETL

LED HARDSCAPE LIGHT SWIVEL

■ ASD-HSLS, ASD-HSLS-RGB

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-HSLS-4N2BR-4P	4"	2	12	No	2,200/2,700/3,000/4,000/5,000	135	Bronze	4-1/8" x 2-15/16" x 7/8"	2	ETL
ASD-HSLS-7N5BR-4P	7"	4.5	12	No	2,200/2,700/3,000/4,000/5,000	301	Bronze	6-15/16" x 2-15/16" x 7/8"	2	ETL
ASD-HSLS-12N5BR-2P	12"	5	12	No	2,200/2,700/3,000/4,000/5,000	334	Bronze	12-3/16" x 2-15/16" x 7/8"	2	ETL

WITH RGBW

ASD-HSLS4-2SM-RGB-BR-8P	4"	1.5	12	SMART APP	2,700 – 6,500 + RGBW	50	Bronze	4-1/2" x 2-15/16" x 1"	2	ETL
ASD-HSLS7-3SM-RGB-BR-8P	7"	3	12	SMART APP	2,700 – 6,500 + RGBW	107	Bronze	6-15/16" x 2-15/16" x 1"	2	ETL
ASD-HSLS12-5SM-RGB-BR-8P	12"	5	12	SMART APP	2,700 – 6,500 + RGBW	159	Bronze	12-7/16" x 2-15/16" x 1"	1	ETL



LED OUTDOOR WALL SCONCE WITH GRID

■ ASD-OLWS-21GR

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-OLWS-21GR-MV-24D25BK	24"	25	120-277	Triac	3,000/4,000/5,000	2,183	Black	6-1/2" x 3" x 23-11/16"	2	ETL
ASD-OLWS-21GR-MV-24D25NK	24"	25	120-277	Triac	3,000/4,000/5,000	2,183	Nickel	6-1/2" x 3" x 23-11/16"	2	ETL
ASD-OLWS-21GR-MV-36D30BK	36"	30	120-277	Triac	3,000/4,000/5,000	2,465	Black	6-1/2" x 3" x 35-7/8"	2	ETL
ASD-OLWS-21GR-MV-36D30NK	36"	30	120-277	Triac	3,000/4,000/5,000	2,465	Nickel	6-1/2" x 3" x 35-7/8"	2	ETL

LED OUTDOOR WALL SCONCE

■ ASD-OLWS-21, ASD-OLWS-21-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-OLWS-21-MV-10D15CC-BK	10"	15	120-277	Triac	3,000/4,000/5,000	1,361	Black	7" x 3-1/4" x 10"	2	ETL
ASD-OLWS-21-MV-10D15CC-BZ	10"	15	120-277	Triac	3,000/4,000/5,000	1,361	Bronze	7" x 3-1/4" x 10"	2	ETL
ASD-OLWS-21-MV-10D15CC-NK	10"	15	120-277	Triac	3,000/4,000/5,000	1,361	Nickel	7" x 3-1/4" x 10"	2	ETL
ASD-OLWS-21-MV-18D20CC-BK	18"	20	120-277	Triac	3,000/4,000/5,000	2,457	Black	7" x 3-1/4" x 17-15/16"	2	ETL
ASD-OLWS-21-MV-18D20CC-BZ	18"	20	120-277	Triac	3,000/4,000/5,000	2,457	Bronze	7" x 3-1/4" x 17-15/16"	2	ETL
ASD-OLWS-21-MV-18D20CC-NK	18"	20	120-277	Triac	3,000/4,000/5,000	2,457	Nickel	7" x 3-1/4" x 17-15/16"	2	ETL
ASD-OLWS-21-MV-24D25CC-BK	24"	25	120-277	Triac	3,000/4,000/5,000	3,017	Black	7" x 3-1/4" x 23-13/16"	2	ETL
ASD-OLWS-21-MV-24D25CC-BZ	24"	25	120-277	Triac	3,000/4,000/5,000	3,017	Bronze	7" x 3-1/4" x 23-13/16"	2	ETL
ASD-OLWS-21-MV-24D25CC-NK	24"	25	120-277	Triac	3,000/4,000/5,000	3,017	Nickel	7" x 3-1/4" x 23-13/16"	2	ETL
ASD-OLWS-21-MV-36D30CC-BK	36"	30	120-277	Triac	3,000/4,000/5,000	3,268	Black	7" x 3-1/4" x 36"	2	ETL
ASD-OLWS-21-MV-36D30CC-NK	36"	30	120-277	Triac	3,000/4,000/5,000	3,268	Nickel	7" x 3-1/4" x 36"	2	ETL

WITH PHOTOCELL

ASD-OLWS-21-MV-10N15BK-PC	10"	15	120-277	No	3,000/4,000/5,000	1,281	Black	7" x 3-1/4" x 10-7/16"	2	ETL
ASD-OLWS-21-MV-10N15NK-PC	10"	15	120-277	No	3,000/4,000/5,000	1,281	Nickel	7" x 3-1/4" x 10-7/16"	2	ETL

WITH MOTION SENSOR

ASD-OLWS-21-10N15BK-MS	10"	15	120-277	No	3,000/4,000/5,000	1,172	Black	7" x 3-9/16" x 9-15/16"	4	ETL
ASD-OLWS-21-10N15NK-MS	10"	15	120-277	No	3,000/4,000/5,000	1,172	Nickel	7" x 3-9/16" x 9-15/16"	4	ETL
ASD-OLWS-21-18N20BK-MS	18"	20	120-277	No	3,000/4,000/5,000	2,002	Black	7" x 3-9/16" x 17-15/16"	2	ETL
ASD-OLWS-21-18N20NK-MS	18"	20	120-277	No	3,000/4,000/5,000	2,002	Nickel	7" x 3-9/16" x 17-15/16"	2	ETL

WITH RGBW

ASD-OLWS-21-MV-10D15SM-RGBW-BK	10"	15	120-277	SMART APP	2,700 – 6,500 + RGBW	1,188	Black	7" x 3-1/4" x 10"	2	ETL
ASD-OLWS-21-MV-10D15SM-RGBW-NK	10"	15	120-277	SMART APP	2,700 – 6,500 + RGBW	1,188	Nickel	7" x 3-1/4" x 10"	2	ETL
ASD-OLWS-21-MV-24D23SM-RGBW-BK	24"	23	120-277	SMART APP	2,700 – 6,500 + RGBW	2,274	Black	7" x 3-1/4" x 23-13/16"	2	ETL
ASD-OLWS-21-MV-24D23SM-RGBW-NK	24"	23	120-277	SMART APP	2,700 – 6,500 + RGBW	2,274	Nickel	7" x 3-1/4" x 23-13/16"	2	ETL

LED OUTDOOR WALL SCONCE

■ ASD-OLWS-22

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-OLWS-22-MV-12N15CC-BZ	12"	15	120-277	No	3,000/4,000/5,000	1,010	Oil Rubbed Bronze	12" x 6-1/8" x 4"	4	ETL / Energy Star
ASD-OLWS-22-MV-18N20CC-BK	18"	20	120-277	No	3,000/4,000/5,000	1,515	Black	17-15/16" x 6-1/8" x 4"	4	ETL / Energy Star
ASD-OLWS-22-MV-18N20CC-BZ	18"	20	120-277	No	3,000/4,000/5,000	1,515	Oil Rubbed Bronze	17-15/16" x 6-1/8" x 4"	4	ETL / Energy Star
ASD-OLWS-22-MV-24N23CC-BK	24"	23	120-277	No	3,000/4,000/5,000	1,970	Black	24-1/16" x 6-1/8" x 4"	4	ETL / Energy Star
ASD-OLWS-22-MV-24N23CC-BZ	24"	23	120-277	No	3,000/4,000/5,000	1,970	Oil Rubbed Bronze	24-1/16" x 6-1/8" x 4"	4	ETL / Energy Star
ASD-OLWS-22-MV-36N28CC-BK	36"	28	120-277	No	3,000/4,000/5,000	2,690	Matte Black	36-1/16" x 6-1/8" x 4"	4	ETL

LED OUTDOOR WALL SCONCE

■ ASD-OLWS-23, ASD-OLWS23-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-OLWS-23-8D12CC-BK	8"	12	120	Triac	3,000/4,000/5,000	909	Black	8" x 6" x 3-1/8"	4	ETL
ASD-OLWS-23-14D20CC-BK	14"	20	120	Triac	3,000/4,000/5,000	1,909	Black	14" x 6" x 3-1/8"	4	ETL

WITH PHOTOCELL

ASD-OLWS-23-14N20CC-PC-BK	14"	20	120	No	3,000/4,000/5,000	1,909	Black	14-5/8" x 6" x 3-1/8"	4	ETL
---------------------------	-----	----	-----	----	-------------------	-------	-------	-----------------------	---	-----

WITH RGBW

ASD-OLWS23-14D20SM-RGBW-BK	14"	20	120-277	SMART APP	2,700 – 6,500 + RGBW	1,829	Black	14" x 6" x 3-1/8"	4	ETL
----------------------------	-----	----	---------	-----------	----------------------	-------	-------	-------------------	---	-----



LED OUTDOOR WALL SCONCE

■ ASD-LWS26S, ASD-LWS26S-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS26S-13D12BK	13"	11.5	120	Triac	3,000/4,000/5,000	566	Black	4-3/4" x 2-1/2" x 13-3/4"	2	ETL
ASD-LWS26S-18D12BK	18"	11.5	120	Triac	3,000/4,000/5,000	495	Black	4-3/4" x 2-1/2" x 17-15/16"	2	ETL
ASD-LWS26S-18D12WH	18"	11.5	120	Triac	3,000/4,000/5,000	495	White	4-3/4" x 2-1/2" x 17-15/16"	2	ETL

120-277

ASD-LWS26S-MV-24D20CC-BK	24"	20	120-277	Triac	3,000/4,000/5,000	581	Black	4-3/4" x 2-15/16" x 24"	2	ETL
--------------------------	-----	----	---------	-------	-------------------	-----	-------	-------------------------	---	-----

WITH PHOTOCELL

ASD-LWS26S-13N12BK-PC	13"	11.5	120	No	3,000/4,000/5,000	566	Black	4-3/4" x 2-1/2" x 13-3/4"	2	ETL
ASD-LWS26S-18N12BK-PC	18"	11.5	120	No	3,000/4,000/5,000	495	Black	4-3/4" x 2-1/2" x 17-15/16"	2	ETL

WITH RGBW

ASD-LWS26-13N9AC-RGBW-BK	13"	8.5	120-277	No	3,000 – 5,000 + RGBW	243	Black	4-3/4" x 2-7/8" x 13-3/4"	2	ETL
ASD-LWS26-18N9AC-RGBW-BK	18"	8.5	120-277	No	3,000 – 5,000 + RGBW	190	Black	4-3/4" x 2-7/8" x 17-15/16"	2	ETL

LED OUTDOOR WALL SCONCE

■ ASD-LWS28S

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS28S-12D22CC-BK	12"	22	120	Triac	3,000/4,000/5,000	485	Black	5-1/2" x 2-3/16" x 11-13/16"	4	ETL

120-277

ASD-LWS28S-MV-18D22CC-BK	18"	22	120-277	Triac	3,000/4,000/5,000	520	Black	5-1/2" x 2-3/16" x 18-1/8"	2	ETL
ASD-LWS28S-MV-18D22WH	18"	22	120-277	Triac	3,000/4,000/5,000	520	White	5-1/2" x 2-3/16" x 18-1/8"	2	ETL
ASD-LWS28S-MV-24D22CC-BK	24"	22	120-277	Triac	3,000/4,000/5,000	531	Black	5-1/2" x 2-3/16" x 24"	2	ETL
ASD-LWS28S-MV-24D22WH	24"	22	120-277	Triac	3,000/4,000/5,000	531	White	5-1/2" x 2-3/16" x 24"	2	ETL

LED OUTDOOR WALL SCONCE WITH BACKLIGHT

■ ASD-LWS27B

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS27B-18D18BK	18"	18	120-277	Triac	3,000/4,000/5,000	1,272	18" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27B-24D24BK	24"	24	120-277	Triac	3,000/4,000/5,000	1,605	24" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27B-36D30BK	36"	30	120-277	Triac	3,000/4,000/5,000	1,945	36" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27B-48D36BK	48"	36	120-277	Triac	3,000/4,000/5,000	2,280	48" x 3-1/8" x 2-1/4"	1	ETL
ASD-LWS27B-72D40BK	72"	40	120-277	Triac	3,000/4,000/5,000	2,469	72" x 3-1/8" x 2-1/4"	1	ETL

LED OUTDOOR WALL SCONCE WIDE ACRYLIC

■ ASD-LWS27A, ASD-LWS27A-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS27A-18D18BK	18"	18	120-277	Triac	3,000/4,000/5,000	1,573	18" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27A-24D24BK	24"	24	120-277	Triac	3,000/4,000/5,000	2,001	24" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27A-36D30BK	36"	30	120-277	Triac	3,000/4,000/5,000	2,356	36" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27A-48D36BK	48"	36	120-277	Triac	3,000/4,000/5,000	2,980	48" x 5-7/8" x 1-13/16"	1	ETL
ASD-LWS27A-72D40BK	72"	40	120-277	Triac	3,000/4,000/5,000	3,620	72" x 5-7/8" x 1-13/16"	1	ETL

WITH RGBW

ASD-LWS27A-18D12SM-RGBW-BK	18"	12	120-277	SMART APP	2,700 – 6,500 + RGBW	590	18" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27A-24D18SM-RGBW-BK	24"	18	120-277	SMART APP	2,700 – 6,500 + RGBW	1,048	24" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27A-48D36SM-RGBW-BK	48"	36	120-277	SMART APP	2,700 – 6,500 + RGBW	1,883	48" x 5-7/8" x 1-13/16"	1	ETL



LED OUTDOOR WALL SCONCE NARROW DESIGN

■ ASD-LWS27N, ASD-LWS27N-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS27N-18D18BK	18"	18	120-277	Triac	3,000/4,000/5,000	1,548	18" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27N-24D24BK	24"	24	120-277	Triac	3,000/4,000/5,000	2,061	24" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27N-36D30BK	36"	30	120-277	Triac	3,000/4,000/5,000	2,534	36" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27N-48D36BK	48"	36	120-277	Triac	3,000/4,000/5,000	2,886	48" x 3-1/8" x 2-1/4"	1	ETL
ASD-LWS27N-72D40BK	72"	40	120-277	Triac	3,000/4,000/5,000	3,245	72" x 3-1/8" x 2-1/4"	1	ETL

WITH RGBW

ASD-LWS27N-24D18SM-RGBW-BK	24"	18	120-277	SMART APP	2,700 – 6,500 + RGBW	960	24" x 3-1/8" x 2-1/4"	2	ETL
ASD-LWS27N-48D36SM-RGBW-BK	48"	36	120-277	SMART APP	2,700 – 6,500 + RGBW	1,979	48" x 3-1/8" x 2-1/4"	1	ETL

LED OUTDOOR WALL SCONCE WITH CENTER LIGHT

■ ASD-LWS27C, ASD-LWS27C-RGBW

Model	Size	Watts	Input Voltage	Dimmable	CCT	Lm	Dimensions DxH	Pcs. per Carton	Certification
ASD-LWS27C-18D18BK	18"	18	120-277	Triac	3,000/4,000/5,000	1,186	18" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27C-24D24BK	24"	24	120-277	Triac	3,000/4,000/5,000	1,637	24" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27C-36D30BK	36"	30	120-277	Triac	3,000/4,000/5,000	1,855	36" x 5-7/8" x 1-13/16"	2	ETL
ASD-LWS27C-48D36BK	48"	36	120-277	Triac	3,000/4,000/5,000	2,108	48" x 5-7/8" x 1-13/16"	1	ETL
ASD-LWS27C-72D40BK	72"	40	120-277	Triac	3,000/4,000/5,000	2,338	72" x 5-7/8" x 1-13/16"	1	ETL

WITH RGBW

ASD-LWS27C-18D20SM-RGBW-BK	18"	20	120-277	SMART APP	2,700 – 6,500 + RGBW	947	18" x 5-7/8" x 1-7/8"	2	ETL
ASD-LWS27C-24D24SM-RGBW-BK	24"	24	120-277	SMART APP	2,700 – 6,500 + RGBW	1,096	24" x 5-7/8" x 1-7/8"	2	ETL

LED ROUND OUTDOOR WALL CYLINDER

■ ASD-LCLR, ASD-LCLR2-RGBW

Model	Light Direction	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LCLR-1A-9BK	1	9	120	Triac	3,000/4,000/5,000	1,002	Black	4-3/8" x 6-7/16" x 7-7/8"	2	ETL
ASD-LCLR-2A-18BK	2	18	120	Triac	3,000/4,000/5,000	1,859	Black	4-3/8" x 6-7/16" x 11-13/16"	2	ETL

WITH PHOTOCELL

ASD-LCLR-1A-9BK-PC	1	9	120	No	3,000/4,000/5,000	1,002	Black	4-3/8" x 6-7/16" x 7-7/8"	2	ETL
ASD-LCLR-2A-18BK-PC	2	18	120	No	3,000/4,000/5,000	1,859	Black	4-3/8" x 6-7/16" x 11-13/16"	2	ETL

WITH DECORATIVE RINGS

ASD-LCLR-1B-9BK	1	9	120-277	Triac	3,000/4,000/5,000	579	Black	4-3/8" x 6-9/16" x 7-15/16"	2	ETL
ASD-LCLR-2B-18BK	2	18	120-277	Triac	3,000/4,000/5,000	1,180	Black	4-3/8" x 6-9/16" x 11-13/16"	2	ETL

WITH RGBW

ASD-LCLR2-30SM-RGBW-BK	2	30	120	SMART APP	2,700 – 6,500 + RGB	919	Black	4-15/16" x 6-1/16" x 12-1/18"	2	ETL
------------------------	---	----	-----	-----------	---------------------	-----	-------	-------------------------------	---	-----



LED SQUARE OUTDOOR WALL CYLINDER

ASD-LCLS

Model	Light Direction	Watts	Input Voltage	Dimmable	CCT	Lm	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-LCLS-1A-9BK	1	9	120	Triac	3,000/4,000/5,000	819	Black	4-3/8" x 5-13/16" x 7-7/8"	6	ETL
ASD-LCLS-2A-18BK	2	18	120	Triac	3,000/4,000/5,000	1,613	Black	4-3/8" x 5-13/16" x 10-13/16"	6	ETL

WITH PHOTOCELL

ASD-LCLS-1A-9BK-PC	1	9	120	No	3,000/4,000/5,000	738	Black	4-3/8" x 5-13/16" x 7-7/8"	6	ETL
ASD-LCLS-2A-18BK-PC	2	18	120	No	3,000/4,000/5,000	1,541	Black	4-3/8" x 5-13/16" x 10-13/16"	6	ETL

WITH DECORATIVE RINGS

ASD-LCLS-1B-9BK	1	9	120	Triac	3,000/4,000/5,000	502	Black	4-3/8" x 5-13/16" x 7-15/16"	2	ETL
ASD-LCLS-2B-18BK	2	18	120	Triac	3,000/4,000/5,000	962	Black	4-3/8" x 5-13/16" x 11-13/16"	2	ETL



BULB ROUND OUTDOOR WALL CYLINDER

ASD-OCLR

Model	Light Direction	Bulb Type	Voltage	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-OCLR-1A-BK	1	1 x E26 60W max	120	Black	4-3/8" x 6-7/16" x 7-7/8"	2	ETL
ASD-OCLR-1A-WH	1	1 x E26 60W max	120	White	4-3/8" x 6-7/16" x 7-7/8"	2	ETL
ASD-OCLR-2A-BK	2	2 x E26 60W max	120	Black	4-3/8" x 6-7/16" x 11-13/16"	2	ETL
ASD-OCLR-2A-WH	2	2 x E26 60W max	120	White	4-3/8" x 6-7/16" x 11-13/16"	2	ETL

WITH PHOTOCELL

ASD-OCLR-1A-PC-BK	1	1 x E26 60W max	120	Black	4-3/8" x 6-7/16" x 7-7/8"	2	ETL
ASD-OCLR-2A-PC-BK	2	2 x E26 60W max	120	Black	4-3/8" x 6-7/16" x 11-13/16"	2	ETL

WITH DECORATIVE RINGS

ASD-OCLR-1B-BK	1	1 x E26 60W max	120	Black	4-3/8" x 6-9/16" x 7-15/16"	2	ETL
ASD-OCLR-2B-BK	2	2 x E26 60W max	120	Black	4-3/8" x 6-9/16" x 11-13/16"	2	ETL



BULB SQUARE OUTDOOR WALL CYLINDER

ASD-OCLS

Model	Light Direction	Bulb Type	Voltage	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-OCLS-1A-BK	1	1 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 7-7/8"	2	ETL
ASD-OCLS-2A-BK	2	2 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 11-13/16"	2	ETL

WITH PHOTOCELL

ASD-OCLS-1A-PC-BK	1	1 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 7-7/8"	2	ETL
ASD-OCLS-2A-PC-BK	2	2 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 11-13/16"	2	ETL

WITH DECORATIVE RINGS

ASD-OCLS-1B-BK	1	1 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 7-15/16"	2	ETL
ASD-OCLS-2B-BK	2	2 x E26 60W max	120	Black	4-3/8" x 5-13/16" x 11-13/16"	2	ETL



BULB ROUND OUTDOOR BOLLARD WITH DECORATIVE RING

ASD-BLC-R

Model	Size	Bulb Type	Voltage	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-BLC-R12B-BK	12"	1 x E26 60W max	120	Black	11-13/16" x 5-1/2" x 5-1/2"	1	ETL
ASD-BLC-R24B-BK	24"	1 x E26 60W max	120	Black	23-5/8" x 5-1/2" x 5-1/2"	1	ETL

BULB SQUARE OUTDOOR BOLLARD WITH DECORATIVE RING

ASD-BLC-S

Model	Size	Bulb Type	Voltage	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-BLC-S12B-BK	12"	1 x E26 60W max	120	Black	11-13/16" x 4-3/4" x 4-3/4"	1	ETL
ASD-BLC-S24B-BK	24"	1 x E26 60W max	120	Black	23-5/8" x 4-3/4" x 4-3/4"	1	ETL

*For pricing and availability, please, check the ASD web portal.
For approved distributors only.