



LED OVAL DOUBLE RING FLUSHMOUNT

LFM0V series

DESIGN: LED OVAL DOUBLE RING FLUSHMOUNT has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact along with an acrylic lens provide many years of use. Smooth triac dimming capabilities from 10% to 100% with modern LED dimmers gives you full control over your space.

VARIETY: Available in oval shape, this fixture comes in 24" and 32" sizes. Choose from 120V or 120-277V options and finishes in Bronze, Black, or Nickel.

COLOR SELECTABLE: You can choose either a 2700K soft white, 3000K warm white, 3500K neutral white, 4000K cool white, or 5000K daylight color temperature.

APPLICATION: The LED OVAL DOUBLE RING FLUSHMOUNT provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. This fixture is also Damp location rated.

ADVANTAGES: With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certifications to guarantee top quality products and safety!



Nickel

Bronze

Black

FINISH



PRODUCT PRESENTATION

MODEL	SIZE	POWER	VOLTAGE	DIMMING	LUMENS	CCT	FINISH	DIMENSIONS	CERTIFICATION
FMOV 120V									
ASD-FMOV-24D38NK	24 inch	38W	120V	Triac	3,735lm	2,700/3,000/3,500/4,000/5,000 K	Nickel	24" x 13-9/16" x 3-13/16"	ETL(5029309)
ASD-FMOV-24D38BZ	24 inch	38W	120V	Triac	3,735lm	2,700/3,000/3,500/4,000/5,000 K	Bronze	24" x 13-9/16" x 3-13/16"	ETL(5029309)
ASD-FMOV-24D38BK	24 inch	38W	120V	Triac	3,735lm	2,700/3,000/3,500/4,000/5,000 K	Black	24" x 13-9/16" x 3-13/16"	ETL(5029309)
ASD-FMOV-32D50NK	32 inch	50W	120V	Triac	4,133lm	2,700/3,000/3,500/4,000/5,000 K	Nickel	32-3/8" x 18-1/8" x 3-7/8"	ETL(5029309)
ASD-FMOV-32D50BZ	32 inch	50W	120V	Triac	4,195lm	2,700/3,000/3,500/4,000/5,000 K	Bronze	32-5/16" x 18-1/8" x 4-3/4"	ETL(5029309)
ASD-FMOV-32D50BK	32 inch	50W	120V	Triac	4,133lm	2,700/3,000/3,500/4,000/5,000 K	Black	32-3/8" x 18-1/8" x 3-7/8"	ETL(5029309)
LFMOV-MV 120-277V									
ASD-LFMOV-MV-32D45CC-NK	32 inch	45W	120-277V	Triac	4,076lm	3,000/4,000/5,000 K	Nickel	32-5/16" x 18-1/8" x 4-5/16"	ETL(5029309)
ASD-LFMOV-MV-32D45CC-BZ	32 inch	45W	120-277V	Triac	3,750lm	3,000/4,000/5,000 K	Bronze	32-7/16" x 18-1/8" x 4-13/16"	ETL(5029883)
ASD-LFMOV-MV-32D45CC-BK	32 inch	45W	120-277V	Triac	3,750lm	3,000/4,000/5,000 K	Black	32-7/16" x 18-1/8" x 4-13/16"	ETL(5029883)

TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	SURGE PROTECTION	HOUSING	LENS	CRI
FMOV 120V								
ASD-FMOV-24D38NK	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	125°	2kV	Iron	PC	>90
ASD-FMOV-24D38BZ	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	125°	2kV	Iron	PC	>90
ASD-FMOV-24D38BK	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	125°	2kV	Iron	PC	>90
ASD-FMOV-32D50NK	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	122°	2kV	Iron	PC	>90
ASD-FMOV-32D50BZ	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	120°	2kV	Iron	PC	>90
ASD-FMOV-32D50BK	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	122°	2kV	Iron	PC	>90
LFMOV-MV 120-277V								
ASD-LFMOV-MV-32D45CC-NK	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	120°	2kV	Steel	Acrylic	>80
ASD-LFMOV-MV-32D45CC-BZ	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80
ASD-LFMOV-MV-32D45CC-BK	Damp location	-4°F to 113°F(-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80

DIMMING COMPATIBLE CONTROLS

BRAND	LUTRON				LEVITON	
Models	CTCL-153PDH-WH-C	S-600H-WH-CSA	DVELV-300P	DVRF-6L	RD06	
	DVCL-153PR-WH	PWCL-153PH	MACL-153M			

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
FMOV 120V							
ASD-FMOV-24D38NK	24" x 13-9/16" x 3-13/16"	3.8 lbs(1.7kg)	2	26.22" x 10.39" x 16.42"	12.6 lbs	81012811379	10810128113790
ASD-FMOV-24D38BZ	24" x 13-9/16" x 3-13/16"	3.8 lbs(1.7kg)	2	26.22" x 10.39" x 16.42"	12.6 lbs	81019020174	10810190201746
ASD-FMOV-24D38BK	24" x 13-9/16" x 3-13/16"	3.8 lbs(1.7kg)	2	26.22" x 10.39" x 16.42"	12.6 lbs	81012811380	10810128113806
ASD-FMOV-32D50NK	32-3/8" x 18-1/8" x 3-7/8"	7.7 lbs(3.5kg)	2	34.45" x 20.47" x 10.31"	18.7 lbs	81012811381	10810128113813
ASD-FMOV-32D50BZ	32-5/16" x 18-1/8" x 4-3/4"	7.1 lbs(3.2kg)	2	34.45" x 20.47" x 10.31"	18.7 lbs	81019020053	10810190200534
ASD-FMOV-32D50BK	32-3/8" x 18-1/8" x 3-7/8"	7.7 lbs(3.5kg)	2	34.45" x 20.47" x 10.31"	18.7 lbs	81012811382	10810128113820
LFMOV-MV 120-277V							
ASD-LFMOV-MV-32D45CC-NK	32-5/16" x 18-1/8" x 4-5/16"	6.8 lbs(3.1kg)	2	34.45" x 10.31" x 20.47"	21.3 lbs	81005073205	20810050732059
ASD-LFMOV-MV-32D45CC-BZ	32-7/16" x 18-1/8" x 4-13/16"	6.9 lbs(3.1kg)	2	35.20" x 11.80" x 21.50"	21.3 lbs	81005073256	10810050732564
ASD-LFMOV-MV-32D45CC-BK	32-7/16" x 18-1/8" x 4-13/16"	6.9 lbs(3.1kg)	2	35.24" x 11.81" x 21.46"	21.3 lbs	81012811170	10810128111703

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.


PACKAGE CONTENTS LFMOV

DESCRIPTION	QUANTITY
LED Oval Double Ring Flushmount	1
Mounting plate (A)	1
Template (B)	1
Screw (C)	4
Self-tapping screw (D)	4
Wire nut (E)	3
Anchor (F)	4
Box	1

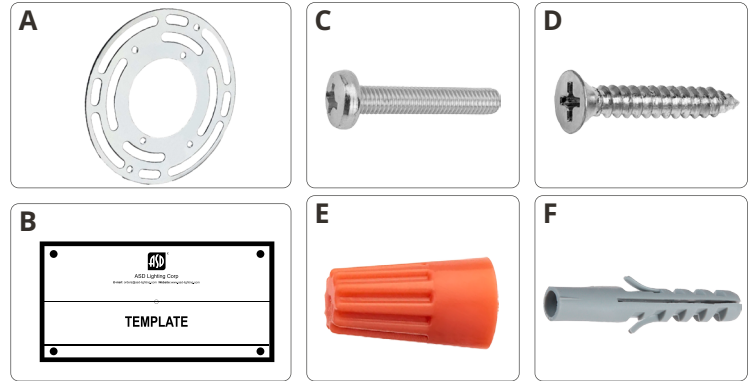


PACKAGE CONTENTS FMOV

DESCRIPTION	QUANTITY
LED Oval Double Ring Flushmount	1
Wire nut (A)	3
Fixture screw (B)	2
Self-tapping screw (C)	4
Anchor (D)	4
Box	1

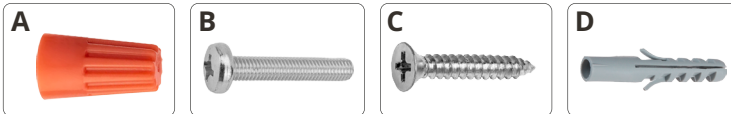


INSTALLATION STEPS FMOV

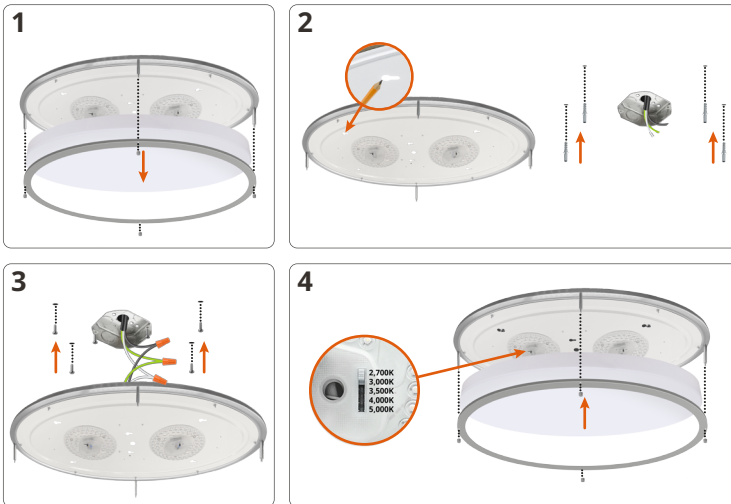

- Unscrew cap nuts counter-clockwise and remove the metal ring and the lens.
- Attach the back plate to the outlet box and mark the location of the holes for the anchors. Remove the back plate and drill four appropriate sized holes for anchors, insert anchors into the holes, twist the four self-tapping screws into the anchors and two fixture screws into the outlet box.
- Connect the wires: Black to Black, White to White, Ground to Ground. Attach the back plate to the ceiling by feeding self-tapping screws and fixture screws through the keyhole slots and then tighten them in the narrow end of the keyhole slots.
- Choose either 2,700K, 3,000K, 3,500K, 4,000K or 5,000K with simple switches on both LED drivers. The fixture is set to 3000K by default. Secure the lens and metal ring to the fixture pan using cap nuts.

INSTALLATION STEPS LFMOV

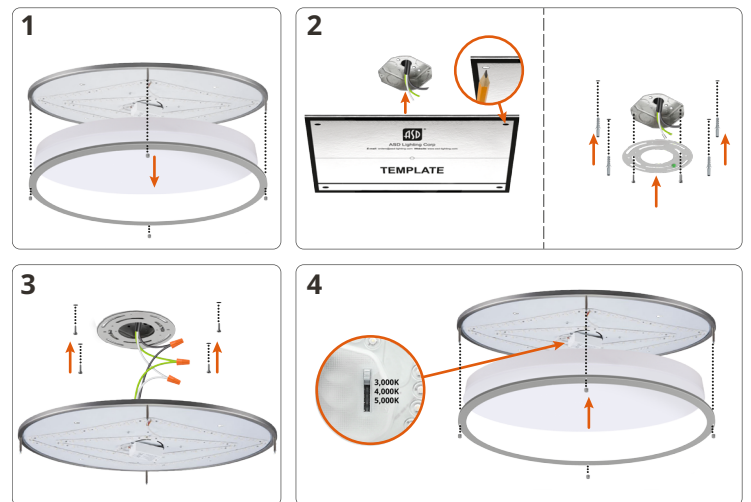

- Unscrew cap nuts counter-clockwise and remove the metal ring and the lens.
- Attach the mounting plate to the outlet box using two screws. Attach the template to the mounting plate and mark the location of the holes for the wall anchors. Remove the template and drill four appropriate sized holes for anchors, insert anchors into the holes, twist the four self-tapping screws into the anchors.
- Connect the wires: Black to Black, White to White, Ground to Ground. Attach the back plate to the ceiling by feeding self-tapping screws through the keyhole slots and then tightening the self-tapping screws in the narrow end of the keyhole slots. Secure the fixture to the mounting plate using two screws.
- Choose either 3,000K, 4,000K or 5,000K with a simple switch. Secure the lens and metal ring to the fixture pan using cap nuts.