



LED DOUBLE-SIDED BUBBLE GLASS OUTDOOR WALL SCONCE

LWS32 series


DESIGN: LED DOUBLE-SIDED BUBBLE GLASS OUTDOOR WALL SCONCE has a modern, multipurpose design and a sleek look with multidirectional illumination. The bubble glass shade creates a luxurious glow and enhances the visual appeal of the fixture. It is designed to operate on 120–277V circuits and provides smooth TRIAC dimming capabilities ranging from 10% to 100%.

COLOR SELECTABLE: You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.

Durable waterproof housing resistant to rust and impact can be used outdoors in all weather conditions.

APPLICATION: The fixture is rated for Wet location, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

ADVANTAGES: With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!



PRODUCT PRESENTATION

MODEL	SIZE	POWER	VOLTAGE	DIMMING	LUMENS	CCT	FINISH	DIMENSIONS	CERTIFICATION
ASD-LWS32-MV-12D12BK	12 inch	12W	120-277V	Triac	588 lm	3,000/4,000/5,000 K	Black	12-3/16" x 4-5/16" x 2-7/16"	ETL (4001256)
ASD-LWS32-MV-16D12BK	16 inch	12W	120-277V	Triac	543 lm	3,000/4,000/5,000 K	Black	16" x 4 5/16" x 2-7/16"	ETL (4001256)
ASD-LWS32-MV-18D12BK	18 inch	12W	120-277V	Triac	494 lm	3,000/4,000/5,000 K	Black	17-15/16" x 4-5/16" x 2-7/16"	ETL (4001256)

TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	SURGE PROTECTION	HOUSING	LENS	CRI
ASD-LWS32-MV-12D12BK	Wet location	-40°F to 113°F(-40°C to 45°C)	>0,9	180°	2kV	Steel	Acrylic	>80
ASD-LWS32-MV-16D12BK	Wet location	-40°F to 113°F(-40°C to 45°C)	>0,9	180°	2kV	Steel	Acrylic	>80
ASD-LWS32-MV-18D12BK	Wet location	-40°F to 113°F(-40°C to 45°C)	>0,9	180°	2kV	Steel	Acrylic	>80

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-LWS32-MV-12D12BK	12-3/16" x 4-5/16" x 2-7/16"	4.9 lbs(2.2kg)	2	15.35" x 10.63" x 7.09"	13.0 lbs	81019020575	10810190205751
ASD-LWS32-MV-16D12BK	16" x 4-5/16" x 2-7/16"	6.3 lbs(2.9kg)	2	19.09" x 9.65" x 7.09"	14.6 lbs	81019020576	10810190205768
ASD-LWS32-MV-18D12BK	17-15/16" x 4-5/16" x 2-7/16"	7.0 lbs(3.2kg)	2	21.06" x 9.65" x 7.09"	16.1 lbs	81019020577	10810190205775

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.


ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

PACKAGE CONTENTS


DESCRIPTION	QUANTITY
LED Double-sided Bubble Glass Outdoor Wall Sconce	1
Mounting plate (A)	1
Mounting screw (B)	2
Screws with rubber gaskets (C)	4
Anchor (D)	2
Self-taping screw (E)	2
Wire nut (F)	3
Box	1



INSTALLATION STEPS

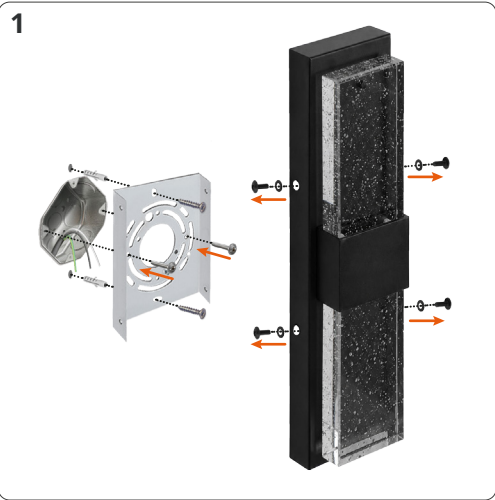

1. Unscrew four fixture screws from both sides of the wall sconce. Remove the mounting plate and attach it to the existing outlet box using two mounting screws. Secure the mounting plate to the wall, using two anchors and two screws.

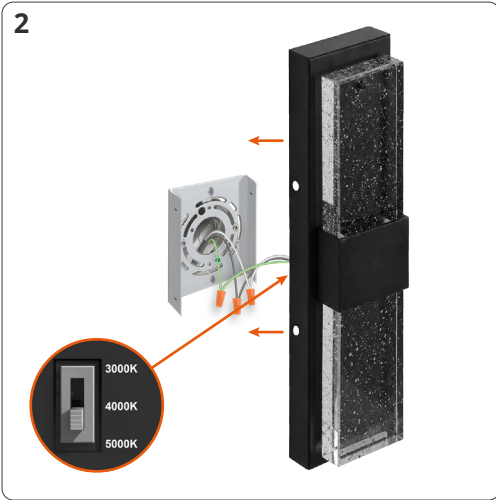

2. Connect the wires: Black to Black, White to White, Green to Green. Secure the connection with wire nuts. Choose preferred color temperature by adjusting switch position.



3. Fix the wall sconce to the mounting plate using four fixture screws on both sides. Before tightening the screws, align the holes of both the fixture and the mounting plate to ensure a solid fit.