



LUV WALL SCONCE

LUV-B series

DESIGN: LUV-B WALL SCONCE brings warmth to any space with its soft light and clean minimalist form. Its modern design makes it a versatile choice for various interior styles. The fixture rotates 360° around its base, allowing you to easily direct light where it's needed, while multiple units can be grouped to create unique lighting compositions. It is designed to operate on 120-277V circuits.

COLOR SELECTABLE: You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.

DIMMING: Smooth triac dimming from 10% to 100% with modern LED dimmers allows you to easily adjust brightness and set the desired ambiance.

APPLICATION: This WALL SCONCE is perfect for creating a cozy and inviting atmosphere in living rooms, bedrooms, hallways, or other residential areas. Its warm glow adds comfort without overpowering the space. This fixture is also Damp Locations rated.

ADVANTAGES: With a lifespan of up to 50,000 hours, this fixture is built to last. ASD provides a 5-year limited warranty and ETL certification to ensure top-quality performance and safety.



PRODUCT PRESENTATION

MODEL	SIZE	POWER	VOLTAGE	DIMMING	LUMENS	CCT	FINISH	DIMENSIONS	CERTIFICATION
ASD-LUV-24B-BK	24 inch	8 W	120-277V	Triac	420lm	3,000/4,000/5,000 K	Matte Black	4-1/2" x 2-5/8" x 23-5/8"	ETL(5032534)
ASD-LUV-28B-BK	28 inch	11 W	120-277V	Triac	532lm	3,000/4,000/5,000 K	Matte Black	4-1/2" x 2-5/8" x 27-9/16"	ETL(5032534)

TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	SURGE PROTECTION	HOUSING	LENS	CRI
ASD-LUV-24B-BK	Damp location	-4°F to 104°F(-20°C to 40°C)	>0,9	360°	2kV	Steel	Acrylic	>80
ASD-LUV-28B-BK	Damp location	-4°F to 104°F(-20°C to 40°C)	>0,9	360°	2kV	Steel	Acrylic	>80

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-LUV-24B-BK	4-1/2" x 2-5/8" x 23-5/8"	1.0 lbs(0.5kg)	2	25.79" x 5.91" x 7.48"	5.0 lbs	81019020247	10810190202477
ASD-LUV-28B-BK	4-1/2" x 2-5/8" x 27-9/16"	1.1 lbs(0.5kg)	2	30.12" x 5.91" x 7.48"	5.5 lbs	81019020248	10810190202484

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

PACKAGE CONTENTS

DESCRIPTION	QUANTITY
LUV Wall Sconce	1
Mounting bracket (A)	1
Mounting screw (B)	2
Wire nut (C)	3
Fixture screw (D)	2
Box	1

A



B




C




D




1

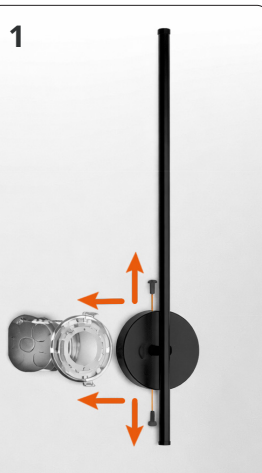

2

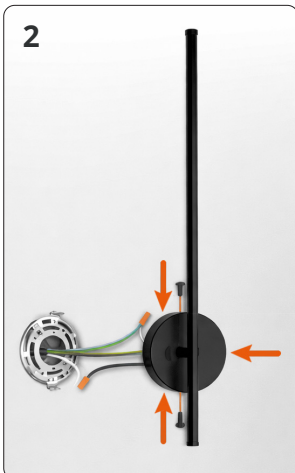

3

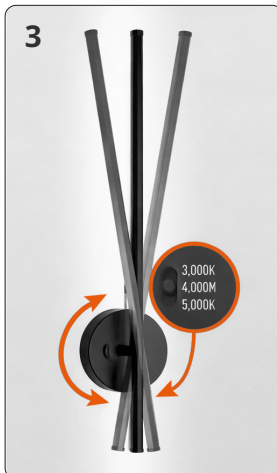

INSTALLATION STEPS

- Pull the supply wires and the house ground wire out from the outlet box. Attach the mounting bracket to the outlet box using two mounting screws. Ensure the bracket is firmly secured.
- Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connections with wire nuts. Place the wall sconce base over the outlet box. Align the holes of the fixture and the mounting plate before tightening the screws to ensure a solid fit.
- Rotate the fixture to the desired position. Choose preferred color temperature by adjusting the switch position.