



LED LANDSCAPE FLOODLIGHT

LSFL series

DESIGN: LED LANDSCAPE FLOODLIGHT has a modern design with effective illumination. These low-voltage floodlights offer an efficient and cost-effective solution for illuminating walkways, gardens, yards, and other outdoor areas. It enhances the beauty, safety, and security of any home, allowing you to fully enjoy your outdoor living spaces long after the sun sets. The 180° adjustable light head allows you to direct the light where it is needed, while the high-quality reflector creates a 36° beam angle. The fixture is designed to operate on 12-24V circuits.

COLOR AND POWER SELECTABLE: You can choose a 2700K, 3000K warm white, 3500K, 4000K cool white, or 5000K daylight color temperature.

DURABLE WATERPROOF HOUSING: Resistant to rust and impact can be used outdoors in all weather conditions.

APPLICATION: The fixture is rated for wet locations, making it perfect for outdoor projects such as walkways, gardens, yards, and other outdoor areas.

ADVANTAGES: With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!




Bronze

FINISH



12-24V
voltage



Wet
location

PRODUCT PRESENTATION

MODEL	PACKAGE TYPE	SIZE	POWER	VOLTAGE	LUMENS	CCT	FINISH	DIMENSIONS	CORD	CERTIFICATION
ASD-LSFL-LV-5BR-6P	6 pack	10 inch	5W	12-24V	264lm	2,700/3,000/3,500/4,000/5,000 K	Bronze	10-3/8" x 4-13/16" x 3-1/16"	4.42 ft	ETL(5003729)



TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	HOUSING	LENS	CRI
ASD-LSFL-LV-5BR-6P	Wet location	-4°F to 104°F (-20°C to 40°C)	>0,7	36°	Aluminium	PC	>90

ORDERING INFORMATION

MODEL	PACKAGE TYPE	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-LSFL-LV-5BR-6P	6 pack	10-3/8" x 4-13/16" x 3-1/16"	4.8 lbs(2.2kg)	12pcs (2x6pack)	13.78" x 11.81" x 9.84"	12.1 lbs	81019020323	10810190203238

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com




INSTALLATION GUIDE

Please read all the instructions below before installation!

PACKAGE CONTENTS

DESCRIPTION	QUANTITY
Light fixture (A)	6
Stake (B)	6
Piercing wire nut (C)	12
Waterproof wire nuts (D)	12
Box	1

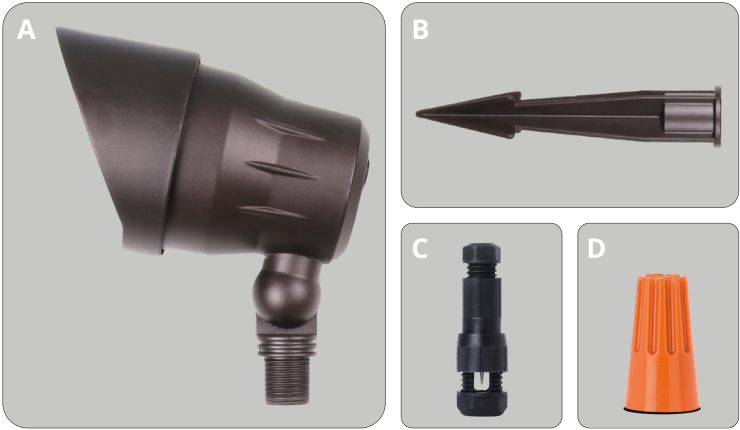

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

INSTALLATION STEPS WITH PIERCING WIRE NUTS

1



1. Turn off the power. Prepare the transformer, the main power cable, and the piercing wire nuts. Pierce the main cable at the fixture installation point using a piercing wire nut, and secure it with the threaded cap.

2



2. Connect the fixture wires to the main power cable on the other side of the piercing wire nuts and tighten the cap. Pull on the wires to ensure the connection is secure. Attach the fixture to the stake, insert it into the ground, and bury the cable. Repeat for all fixtures. The recommended distance between fixtures is 5 feet.

3



3. Adjust the lighting angle, turn on the transformer, and select the desired color temperature using the button on the back of the fixture.

INSTALLATION STEPS WITH WATERPROOF WIRE NUTS

1



1. Turn off the power. Prepare the transformer, main power cord, and waterproof wire nuts. Cut the main cable at the fixture location, separate the wires, and strip about 1/2 inch of insulation.

2



2. Connect the fixture wires to the main power cord using waterproof wire nuts. Attach the fixture to the stake, place it in the ground, and bury the cable. The recommended distance between fixtures is 5 feet. Repeat for all fixtures. The recommended distance between fixtures is 5 feet.

3



3. Adjust the lighting angle, turn on the transformer, and select the desired color temperature using the button on the back of the fixture.