



# LOW VOLTAGE LANDSCAPE LED CONE HEAD PATHWAY LIGHTS

## LSP-CH series



**DESIGN:** LOW VOLTAGE LANDSCAPE LED CONE HEAD PATHWAY LIGHTS have a modern design. it seamlessly blends into any garden or pathway setting while providing warm, inviting illumination. This fixture has a durable die-cast aluminum body. Easy to install with a sturdy ground stake, this light enhances both the beauty and safety of your outdoor living areas, allowing you to enjoy evenings outdoors with confidence and charm. The fixture is designed to operate on 12-24V circuits.

**CONE HEAD:** With its gracefully shaped classic profile, brings refined charm to our LED path light while remaining subtly integrated into any landscape setting.

**COLOR SELECTABLE:** You can choose a 2700K, 3000K warm white, 3500K, 4000K cool white, or 5000K daylight color temperature.

**APPLICATION:** The fixture is rated for Wet location, making it perfect for outdoor projects such as walkways, gardens, patios, and yards, or any other common areas.

**ADVANTAGES:** With calculated lifespan with more than 50000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with UL certification to guarantee top quality products and safety!



## PRODUCT PRESENTATION

MODEL	PACKAGE TYPE	SIZE	POWER	VOLTAGE	LUMENS	CCT	FINISH	DIMENSIONS	CORD	CERTIFICATION
ASD-LSP-CH-LV-5BR-6P	6 pack	15 inch	5W	12-24V	175lm	2,700/3,000/3,500/4,000/5,000 K	Bronze	23" x 6" x 6"	5.25 ft	ETL(5003729)
ASD-LSP-CH-LV-5BK-6P	6 pack	15 inch	5W	12-24V	175lm	2,700/3,000/3,500/4,000/5,000 K	Black	23" x 6" x 6"	5.25 ft	ETL(5003729)



## TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	HOUSING	CRI
ASD-LSP-CH-LV-5BR-6P	Wet location	-4°F to 104°F(-20°C to 40°C)	>0,7	120°	Aluminum	>90
ASD-LSP-CH-LV-5BK-6P	Wet location	-4°F to 104°F(-20°C to 40°C)	>0,7	120°	Aluminum	>90

## ORDERING INFORMATION

MODEL	PACKAGE TYPE	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-LSP-CH-LV-5BR-6P	6 pack	23" x 6" x 6"	6.2 lbs(2.8kg)	12pcs (2x6pack)	16.85" x 10.43" x 14.72"	14.7 lbs	81019020307	10810190203078
ASD-LSP-CH-LV-5BK-6P	6 pack	23" x 6" x 6"	6.2 lbs(2.8kg)	12pcs (2x6pack)	16.85" x 10.43" x 14.72"	14.7 lbs	81019020309	10810190203092

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP** | [www.asd-lighting.com](http://www.asd-lighting.com) | [orders@asd-lighting.com](mailto:orders@asd-lighting.com)



# INSTALLATION GUIDE

Please read all the instructions below before installation!

## IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

### ⚠ WARNING

**Risk of personal injury:** read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

**ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.**

## PACKAGE CONTENTS

DESCRIPTION	QUANTITY
Light fixture (A)	6
Stake (B)	6
Head (C)	6
Piercing wire nut (D)	12
Waterproof wire nuts (E)	12
Box	1

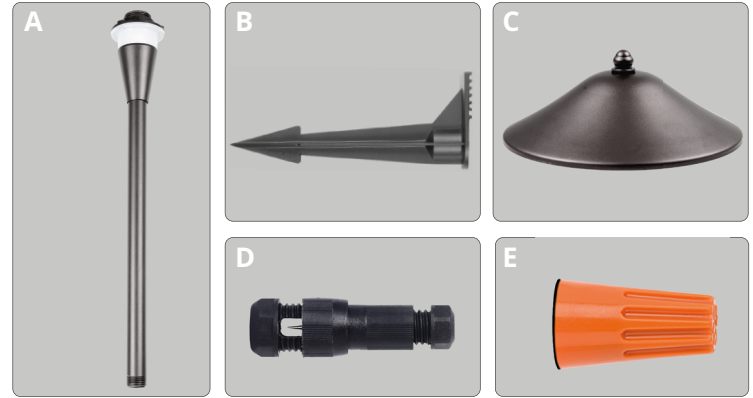

## INSTALLATION STEPS WITH PIERCING WIRE NUTS



1. Turn off the power. Prepare the transformer, the main power cable, and the piercing wire nuts. Pierce the main cable at the fixture installation point using a piercing wire nut, and secure it with the threaded cap.



2. Connect the fixture wires to the main power cable on the other side of the piercing wire nuts and tighten the cap. Pull on the wires to ensure the connection is secure. Attach the fixture to the stake, insert it into the ground, and bury the cable. Repeat for all fixtures. The recommended distance between fixtures is 5 feet.



3. Adjust the tilt angle, turn on the transformer, and select the desired color temperature using the button under the fixture head.

## INSTALLATION STEPS WITH WATERPROOF WIRE NUTS



1. Turn off the power. Prepare the transformer, main power cord, and waterproof wire nuts. Cut the main cable at the fixture location, separate the wires, and strip about 1/2 inch of insulation.



2. Connect the fixture wires to the main power cord using waterproof wire nuts. Attach the fixture to the stake, place it in the ground, and bury the cable. Repeat for all fixtures. The recommended distance between fixtures is 5 feet.



3. Adjust the tilt angle, turn on the transformer, and select the desired color temperature using the button under the fixture head.