



LUV WALL SCONCE

LUV-C series

DESIGN: LUV-C WALL SCONCE combines modern style with functional versatility. Both the fixture and its tubes rotate, allowing 360° rotation around the base and directing light along the tubes exactly where it's needed. It is designed to operate on 120-277V circuits.

COLOR SELECTABLE: You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.

DIMMING: Smooth triac dimming from 10% to 100% with modern LED dimmers allows you to easily adjust brightness and set the desired ambiance.

APPLICATION: This WALL SCONCE is perfect for creating a cozy atmosphere in bathrooms, vanities, hallways, bedrooms, or living rooms. The adjustable tubes and base rotation make it ideal for directing light over mirrors, artwork, or other task areas. This fixture is also Damp Locations rated.

ADVANTAGES: With a lifespan of up to 50,000 hours, this fixture is built to last. ASD provides a 5-year limited warranty and ETL certification to ensure top-quality performance and safety.



PRODUCT PRESENTATION

MODEL	SIZE	POWER	VOLTAGE	DIMMING	LUMENS	CCT	FINISH	DIMENSIONS	CERTIFICATION
ASD-LUV-24C-BK	24 inch	8 W	120-277V	Triac	666lm	3,000/4,000/5,000 K	Matte Black	4-1/2" x 2-11/16" x 23-5/8"	ETL(5032534)
ASD-LUV-24C-GD	24 inch	8 W	120-277V	Triac	666lm	3,000/4,000/5,000 K	Gold	4-1/2" x 2-11/16" x 23-5/8"	ETL(5032534)
ASD-LUV-28C-BK	28 inch	11 W	120-277V	Triac	1,064lm	3,000/4,000/5,000 K	Matte Black	4-1/2" x 2-11/16" x 27-9/16"	ETL(5032534)
ASD-LUV-28C-GD	28 inch	11 W	120-277V	Triac	1,064lm	3,000/4,000/5,000 K	Gold	4-1/2" x 2-11/16" x 27-9/16"	ETL(5032534)

TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	POWER FACTOR	BEAM ANGLE	SURGE PROTECTION	HOUSING	LENS	CRI
ASD-LUV-24C-BK	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	360°	2kV	Steel	Acrylic	>80
ASD-LUV-24C-GD	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	360°	2kV	Steel	Acrylic	>80
ASD-LUV-28C-BK	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	360°	2kV	Steel	Acrylic	>80
ASD-LUV-28C-GD	Damp location	-4°F to 104°F(-20°C to 40°C)	>0.9	360°	2kV	Steel	Acrylic	>80

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-LUV-24C-BK	4-1/2" x 2-11/16" x 23-5/8"	1.5 lbs(0.7kg)	2	13.39" x 5.91" x 7.87"	4.8 lbs	81019020249	10810190202491
ASD-LUV-24C-GD	4-1/2" x 2-11/16" x 23-5/8"	1.5 lbs(0.7kg)	2	13.39" x 5.91" x 7.87"	4.8 lbs	81019020325	10810190203252
ASD-LUV-28C-BK	4-1/2" x 2-11/16" x 27-9/16"	1.7 lbs(0.7kg)	2	15.35" x 5.91" x 7.87"	6.1 lbs	81019020250	10810190202507
ASD-LUV-28C-GD	4-1/2" x 2-11/16" x 27-9/16"	1.7 lbs(0.7kg)	2	15.35" x 5.91" x 7.87"	6.1 lbs	81019020326	10810190203269

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

PACKAGE CONTENTS

DESCRIPTION	QUANTITY
Fixture base (A)	1
Light tube (B)	2
Mounting bracket (C)	1
Mounting screw (D)	2
Wire nut (E)	3
Fixture screw (F)	2
Box	1

A



C



D




E



B



F

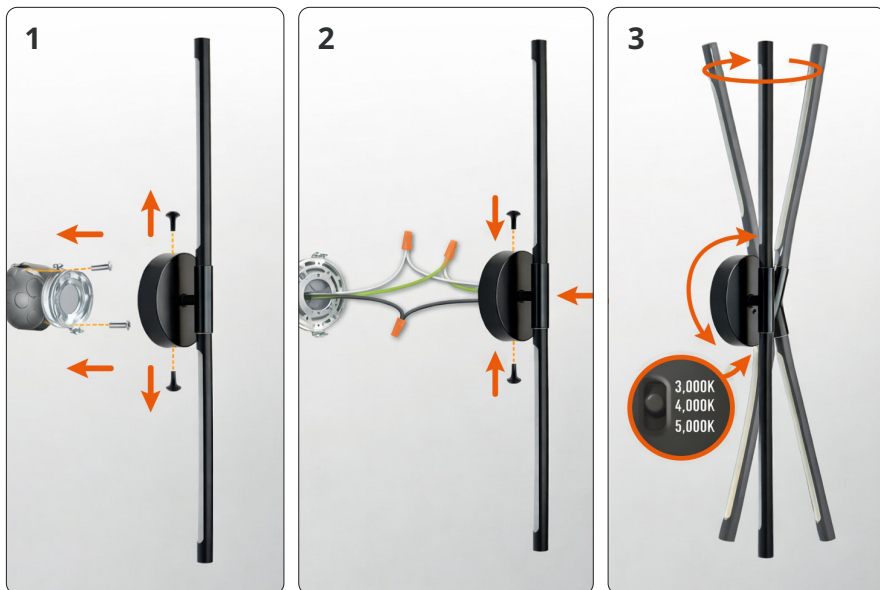

INSTALLATION STEPS

- Insert the tubes into the fixture base until fully seated. Pull the supply wires and the house ground wire out from the outlet box. Attach the mounting bracket to the outlet box using two mounting screws. Ensure the bracket is firmly secured.
- Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connections with wire nuts. Place the wall sconce base over the outlet box. Align the holes of the fixture and the mounting plate before tightening the screws to ensure a solid fit.
- Rotate the fixture and the tubes to the desired position. Choose preferred color temperature by adjusting the switch position.

Note: The tubes can only be removed or rotated when the wall sconce is turned off. Attempting to adjust them while the light is on may damage the fixture.