



*New Standard  
in Lighting!*



**LINEAR LIGHTS**

**PRODUCT**  
PRESENTATION **2025**

# LINEAR LIGHTS

WWW.ASD-LIGHTING.COM



## LED STRIPLIGHTS LSF8

**04** LED STRIPLIGHTS LSF8

**05** LED STRIPLIGHTS LSF8 High Lumen

**06** LED STRIPLIGHTS LSF8 with Q-Base

**07** LED STRIPLIGHTS LSF8 Battery Back-Up

**08** LED STRIPLIGHTS LSF8 with Q-Base and Battery Back-Up

**09** LED STRIPLIGHTS LSF8 RGBW

**10** LSF8 ACCESSORIES



## LED STRIPLIGHTS LSF5


**12** LED STRIPLIGHTS LSF5

**13** LED STRIPLIGHTS LSF5 with Motion Sensor

**14** LED STRIPLIGHTS LSF5 with Emergency Battery

**15** LED STRIPLIGHTS LSF5 with Motion Sensor and Emergency Battery

**16** LSF5 ACCESSORIES

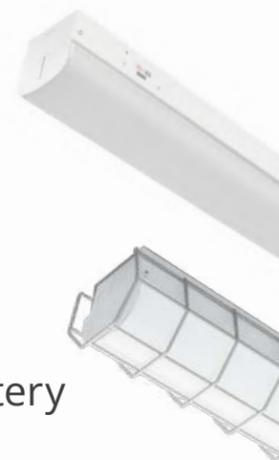

## LED WRAP LIGHTS WRL

**18** LED WRAP LIGHTS WRL

**19** LED WRAP LIGHTS WRL with Motion Sensor

**20** LED WRAP LIGHTS WRL with Emergency Battery

**21** LED WRAP LIGHTS WRL with Motion Sensor and Emergency Battery

**23** LED WRAP LIGHTS WRL25



## LED VAPOR LIGHTS LVP2SM

**25** LED VAPOR LIGHTS LVP2SM


**26** LED VAPOR LIGHTS LVP2SM with Motion Sensor

**27** LED VAPOR LIGHTS LVP2SM with Emergency Battery



# LED STRIPLIGHT


## LSF8

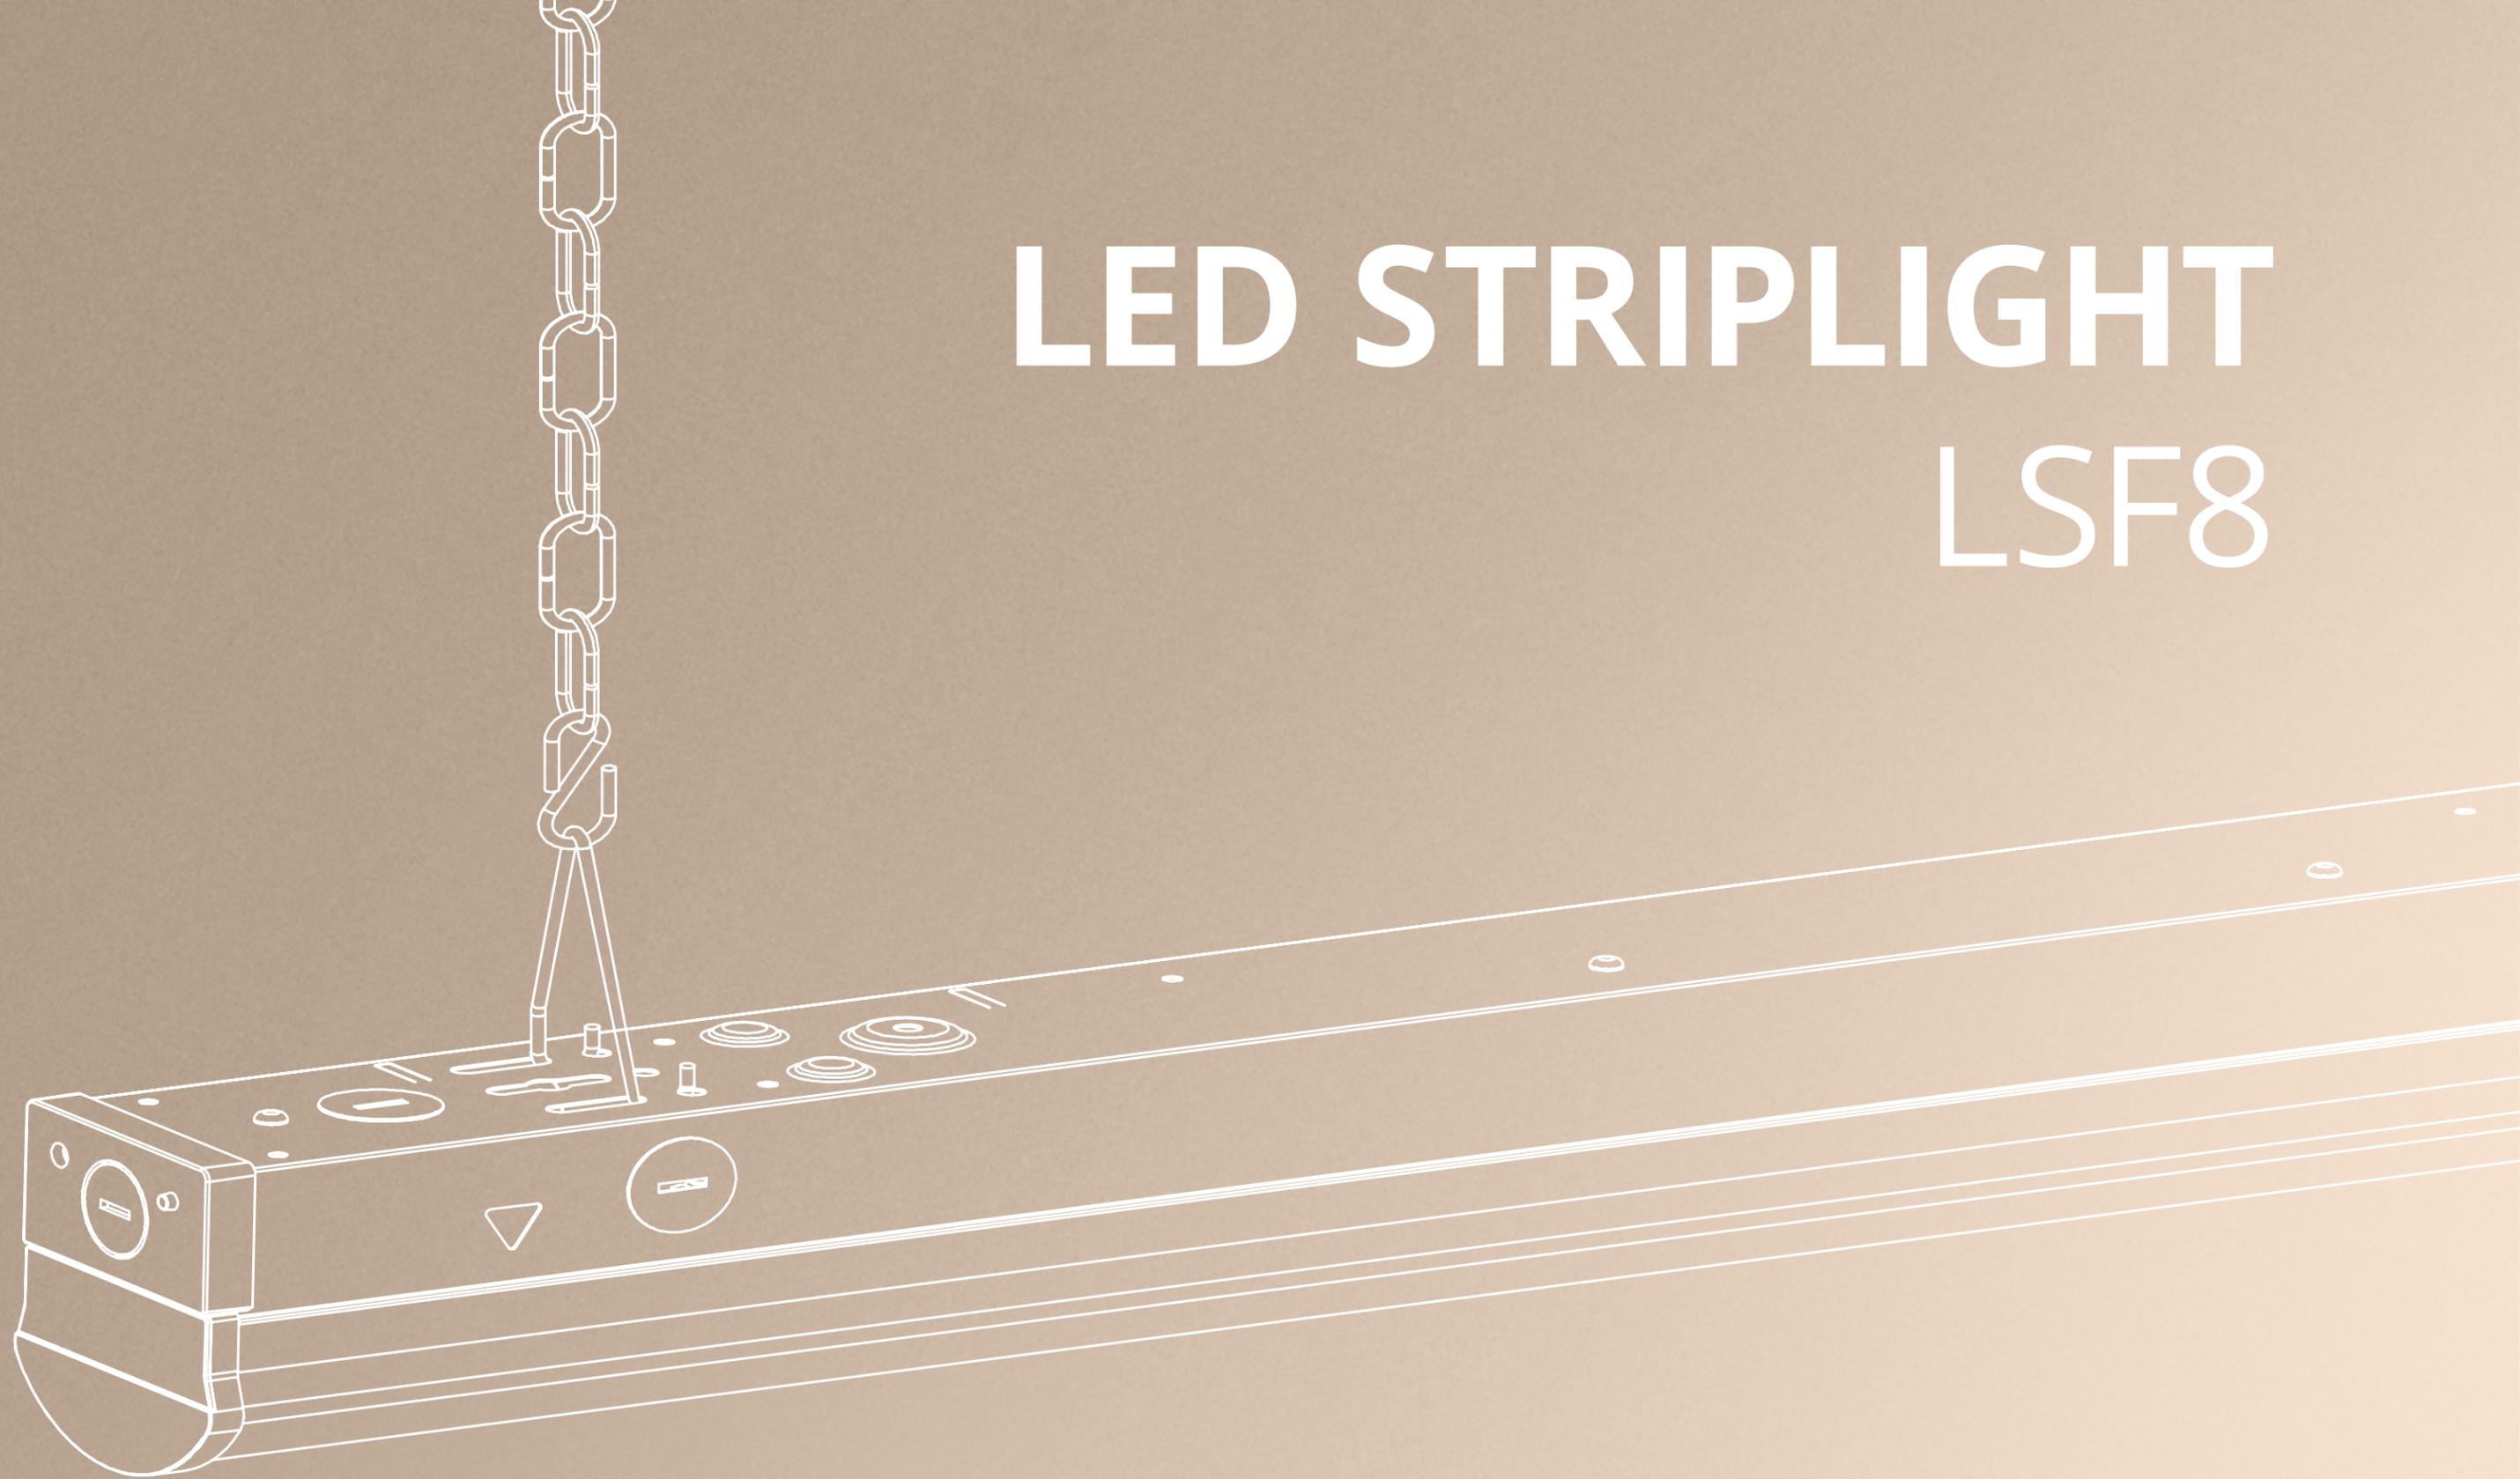

# LED STRIPLIGHT

LSF8

COLOR AND POWER ADJUSTABLE SWITCH



150  
lm/W  
EFFICIENCY



# LED STRIPLIGHT

LED STRIPLIGHT features a narrow, low-profile design ideal for modern commercial spaces. Its durable, commercial-grade housing is resistant to rust and impact, ensuring years of reliable performance. Designed to operate on 120-277V circuits with a 0-10V dimmable driver, it delivers flexible, energy-efficient illumination. With its clean form factor and high-quality construction, this fixture provides a sleek lighting solution suited for a wide range of applications.



# LED STRIPLIGHT

## LSF8



**10,000  
LUMENS**

**20,000  
LUMENS**



COLOR AND POWER ADJUSTABLE SWITCH

White  
**FINISH**

- 120-277V voltage
- 0-10V dimming
- Damp location

# LED STRIPLIGHT

## HIGH OUTPUT


LED STRIPLIGHT HIGH OUTPUT is engineered to meet the demands of modern commercial environments. Its rugged, commercial-grade housing resists rust and impact, ensuring long-term durability. Designed for 120–277V operation with a 0–10V dimmable driver, it offers versatile, energy-efficient lighting control. With exceptionally high lumen output, it delivers bright, consistent illumination ideal for demanding applications. Combining reliable performance with a clean, modern aesthetic, this fixture provides a powerful lighting solution for a wide range of projects.

- SIZE**  
4ft, 8ft
- AVAILABLE POWER**  
50 / 60 / 70W  
100 / 130 / 160W
- COLOR SELECTABLE**  
3000 / 4000 / 5000K

**HIGH LUMEN OUTPUT**



**LINKABLE DESIGN**

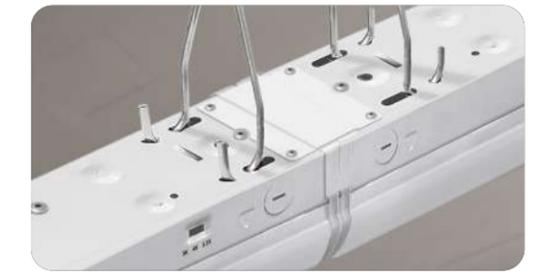

**ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION**



**COLOR AND POWER SELECTABLE**



- DLC LISTED PREMIUM**
- UL CERTIFIED**
- 5 YEAR WARRANTY**

# LED STRIPLIGHT

## LSF8




**150**  
lm/W  
EFFICIENCY

### Q-BASE



ASD-M221R  
INFRARED  
MOTION  
SENSOR



COLOR  
AND POWER  
ADJUSTABLE  
SWITCH



ASD-RC100LCD

White

FINISH

# LED STRIPLIGHT WITH Q-BASE

LED STRIPLIGHT WITH Q-BASE features a narrow design well-suited for modern commercial spaces. Its durable, commercial-grade housing is resistant to rust and impact, ensuring years of reliable performance. Designed for 120–277V operation with a 0–10V dimmable driver, it provides flexible, energy-efficient illumination. Equipped with a Q-Base, the fixture can easily accommodate a motion sensor for added control and efficiency.



SIZE

2ft, 4ft, 8ft



AVAILABLE POWER

15 / 20 / 25W  
20 / 30 / 40W  
55 / 75 / 80W



COLOR  
SELECTABLE

3000 / 4000 / 5000K



BUILT-IN Q-BASE  
MOTION SENSOR



LINKABLE  
DESIGN



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



COLOR AND POWER  
SELECTABLE



120-277V  
voltage



0-10V  
dimming




Damp  
location



# LED STRIPLIGHT

LSF8

150  
lm/W  
EFFICIENCY



COLOR  
AND POWER  
ADJUSTABLE  
SWITCH



TEST BUTTON



FINISH



120-277V  
voltage



0-10V  
dimming



Damp  
location

## LED STRIPLIGHT WITH BATTERY BACK-UP

LED STRIPLIGHT WITH BATTERY BACK-UP delivers reliable illumination for modern commercial environments. Its rugged, commercial-grade housing resists rust and impact, ensuring long-lasting performance. An integrated emergency battery provides dependable backup power during outages, maintaining illumination when it's needed most. This fixture combines durability, efficiency, and safety to create a versatile lighting solution for a wide range of applications.



SIZE

2ft, 4ft, 8ft



AVAILABLE POWER

15 / 20 / 25W  
20 / 30 / 40W  
55 / 75 / 80W



COLOR  
SELECTABLE

3000 / 4000 / 5000K



BUILT-IN BATTERY BACK-UP:  
UP TO 15W



LINKABLE  
DESIGN



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



COLOR AND POWER  
SELECTABLE



# LED STRIPLIGHT

## LSF8




**150  
lm/W**  
EFFICIENCY

**Q-BASE**



ASD-M22IR  
INFRARED  
MOTION  
SENSOR



COLOR AND POWER  
ADJUSTABLE  
SWITCH



TEST  
BUTTON



ASD-RC100LCD

White

**FINISH**

- 120-277V voltage
- 0-10V dimming
- Damp location

# LED STRIPLIGHT WITH Q-BASE AND BATTERY BACK-UP

LED STRIPLIGHT WITH Q-BASE AND BATTERY BACK-UP delivers reliable illumination for modern commercial environments. Its rugged, commercial-grade housing resists rust and impact, ensuring long-lasting performance. An integrated emergency battery provides dependable backup power during outages, maintaining illumination when it's needed most. Equipped with a Q-Base, the fixture can also accommodate a motion sensor for added convenience and energy savings.



**SIZE**  
2ft, 4ft, 8ft



**AVAILABLE POWER**  
15 / 20 / 25W  
20 / 30 / 40W  
55 / 75 / 80W



**COLOR SELECTABLE**  
3000 / 4000 / 5000K



**BUILT-IN BATTERY BACK-UP:  
UP TO 15W**



**BUILT-IN Q-BASE  
MOTION SENSOR**



**LINKABLE  
DESIGN**




**COLOR AND POWER  
SELECTABLE**



# LED STRIPLIGHT

## LSF8

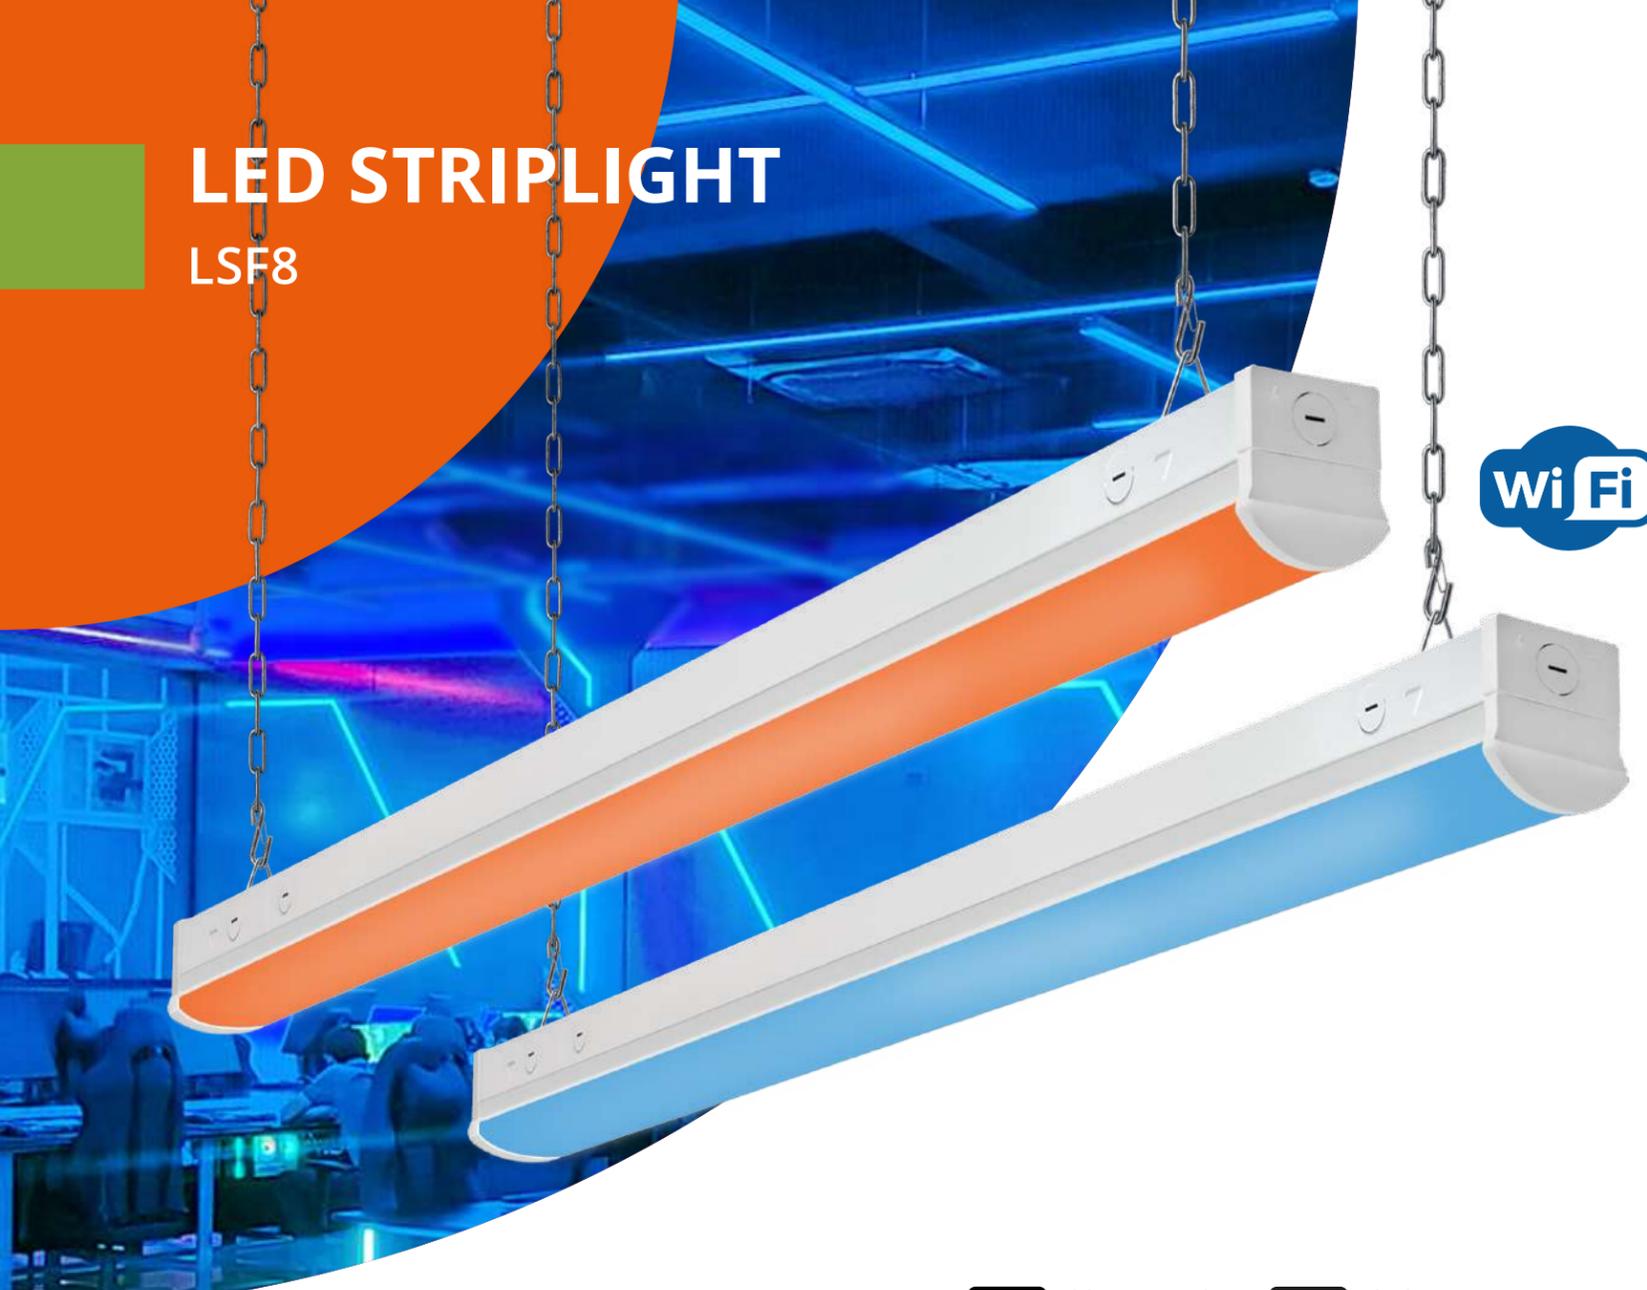

# LED STRIPLIGHT

## RGBW

LED STRIPLIGHT FIXTURE SMART RGBW features a slim, low-profile design with a durable, commercial-grade housing resistant to rust and impact. An anti-glare PMMA lens ensures comfortable, long-lasting illumination. Operating on 120-277V with a 0-10V dimmable driver, the fixture includes RGBW technology with Wi-Fi APP control. Easily select White (5000K), primary colors, or up to 16.7 million color combinations, along with dynamic lighting modes and scheduling for customizable visual effects.

**SIZE**  
4ft

**AVAILABLE POWER**  
40W

**RGBW**  
16.7 million colors

**RGBW DESIGN WITH 16.7 MILLION COLORS**



**CONTROLLED BY SMART APP**



**ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION**



**LINKABLE DESIGN**



**SCHEDULING**



**GROUP CONTROL**



White  
**FINISH**

120-277V voltage  
0-10V dimming  
Damp location

DLC LISTED PREMIUM  
UL CERTIFIED  
5 YEAR WARRANTY

# ACCESSORIES



LSF8

CONNECTION BRACKET



ASD-CB-LSF8

WIRE GUARD

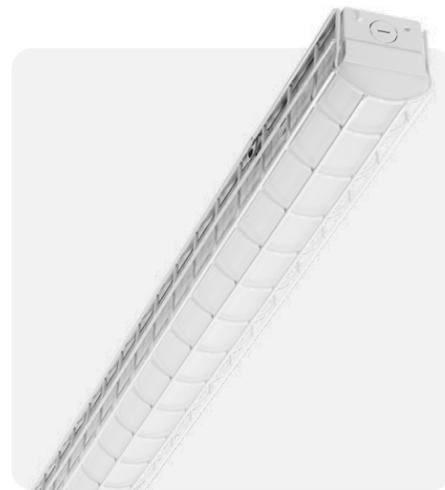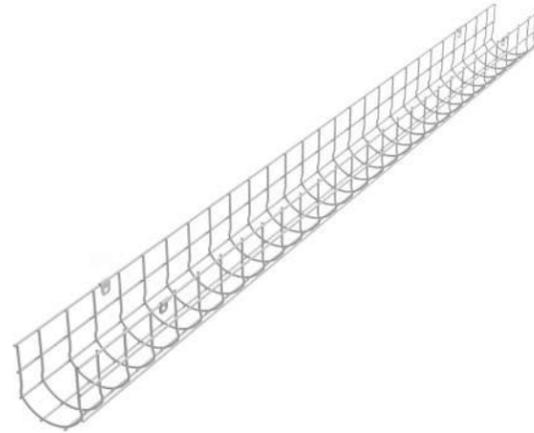

ASD-WG4-LSF8

INFRARED MOTION SENSOR



ASD-M221R


REMOTE CONTROL



ASD-RC100LCD

# LED STRIPLIGHT


LSF5

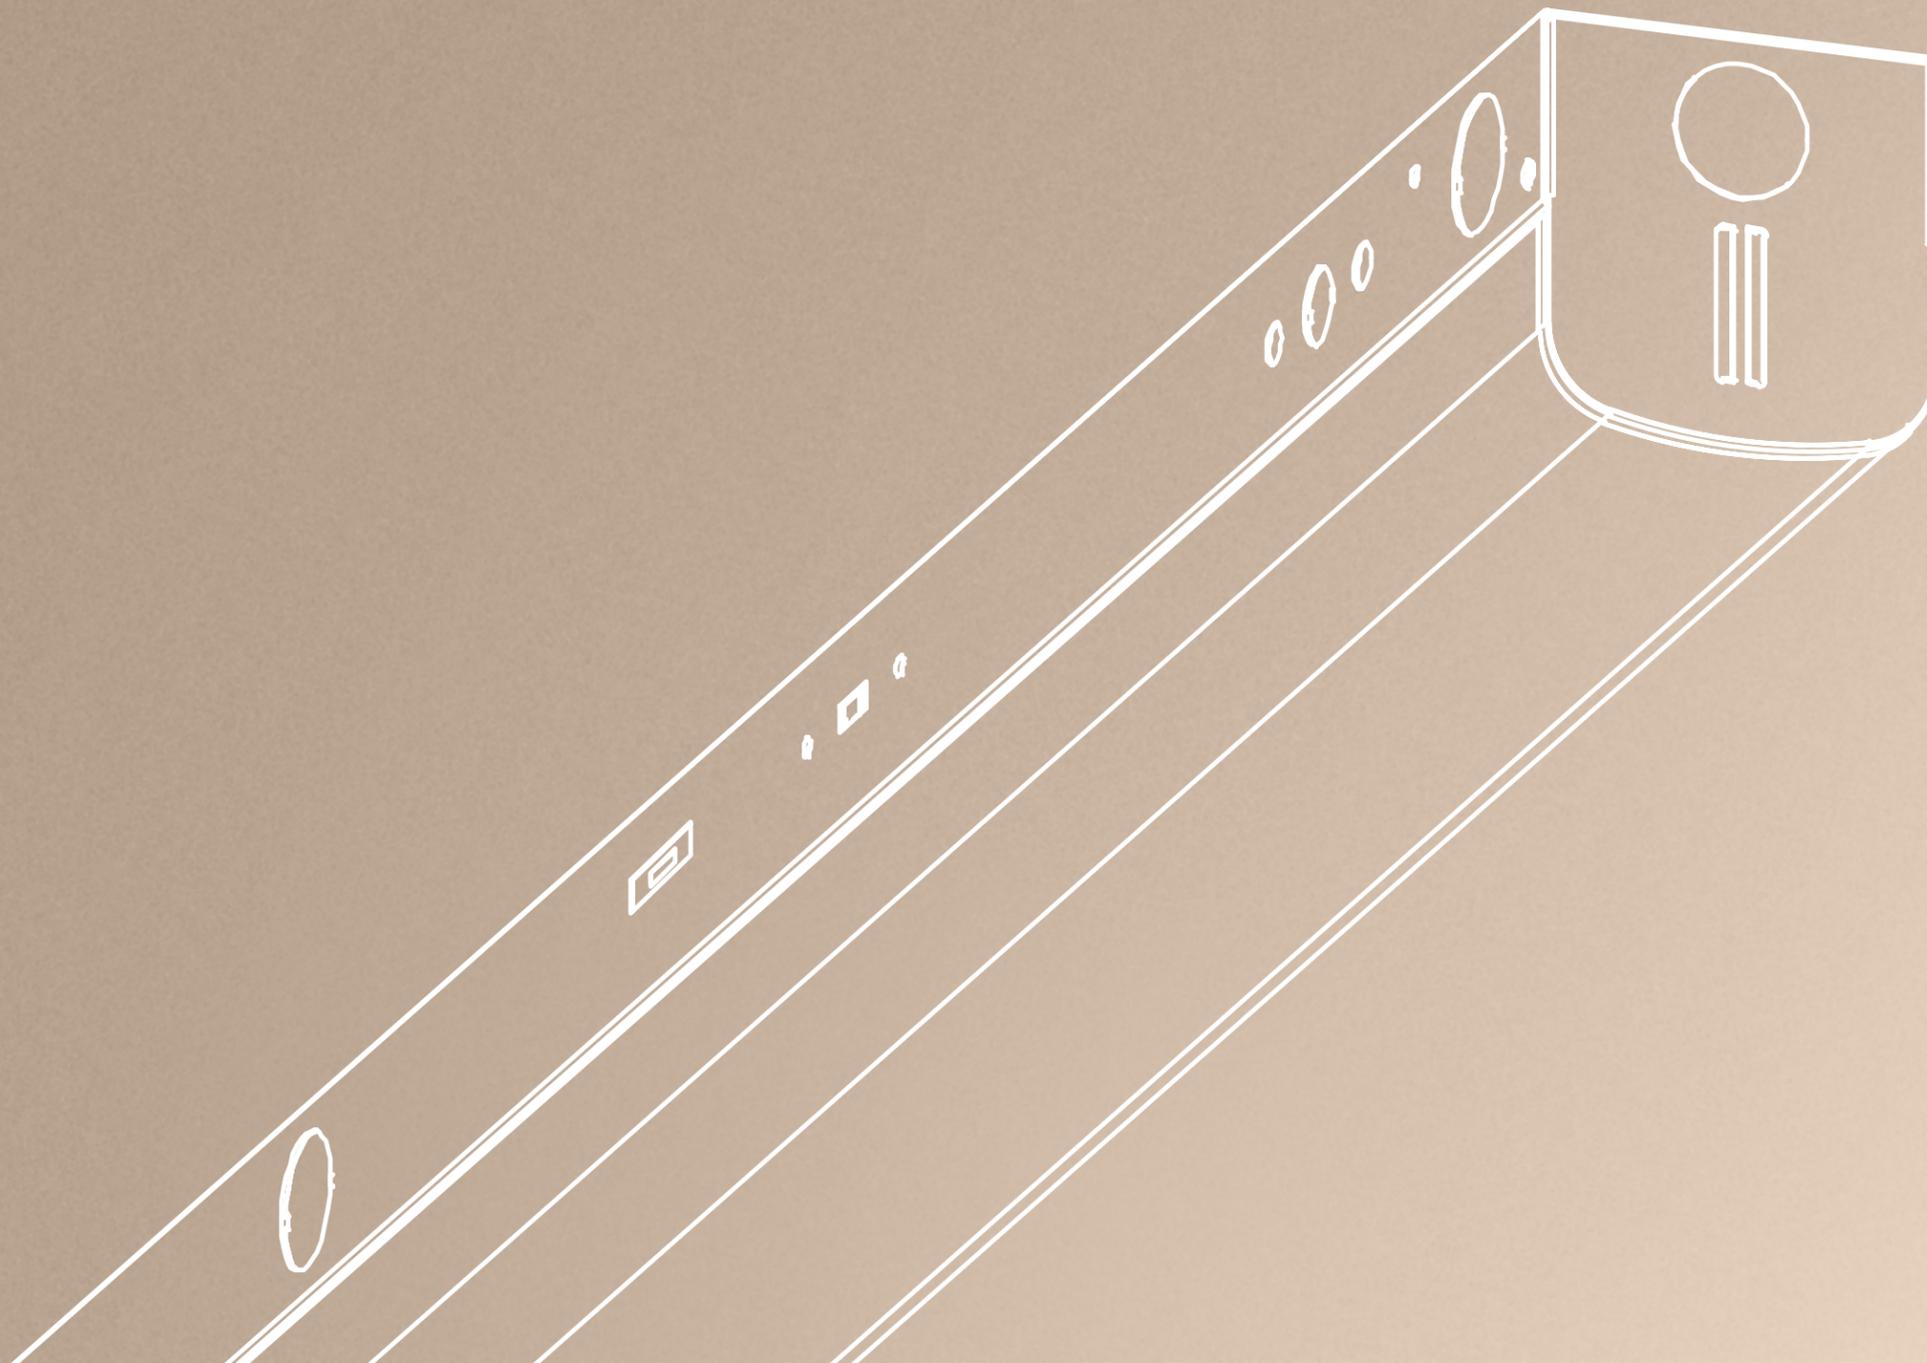

# LED STRIPLIGHT

LSF5

140  
lm/W  
EFFICIENCY



COLOR AND POWER  
ADJUSTABLE  
SWITCH



120-277V  
voltage



0-10V  
dimming



Damp  
location

White

FINISH

# LED STRIPLIGHT

LED STRIPLIGHT features a sleek, narrow, low-profile design built with rugged, commercial-grade housing engineered to resist rust and impact. Its high-quality anti-glare PMMA lens ensures long-lasting, reliable performance. Designed for versatility, it operates on 120-277V circuits and includes a 0-10V dimmable driver for precise lighting control.



SIZE

2ft, 4ft, 8ft



AVAILABLE POWER

20 / 24 / 28W  
22 / 28 / 36 / 44W  
48 / 68 / 90W



COLOR  
SELECTABLE

3500 / 4000 / 5000K



COLOR AND POWER  
SELECTABLE



POWER SELECTABLE

COLOR SELECTABLE



LINKABLE  
DESIGN



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



DURABLE COMMERCIAL GRADE  
HOUSING RESISTANT TO RUST  
AND IMPACT



# LED STRIPLIGHT

LSF5



COLOR AND POWER ADJUSTABLE SWITCH



# LED STRIPLIGHT WITH MOTION SENSOR

LED STRIPLIGHT WITH MOTION SENSOR features a rugged, commercial-grade housing designed to resist rust and impact, paired with an anti-glare PMMA lens that delivers clear, comfortable illumination for long-term reliability. Its modular design allows multiple fixtures to be easily connected using the included bracket, creating smooth, continuous-run configurations. The unit operates on 120–277V circuits and incorporates a 0–10V dimmable driver for accurate and flexible light control.

**SIZE**  
2ft, 4ft, 8ft

**AVAILABLE POWER**  
20 / 24 / 28W  
22 / 28 / 36 / 44W  
48 / 68 / 90W

**COLOR SELECTABLE**  
3500 / 4000 / 5000K

**BUILT-IN MOTION SENSOR**



**LINKABLE DESIGN**



**ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION**



**COLOR AND POWER SELECTABLE**



## REMOTE CONTROL

MICROWAVE MOTION SENSOR



ASD-RC100LCD

## MANUAL SENSOR SETTINGS

ON

1	2	3	4	5	6	7	8	9	10
Detection range: 20-100%	Hold Time: 10s-15min	Daylight Sensor: off-50 lux	Stand-by dim: 0-50%	Stand-by period: ON - - 60min					

White

FINISH


120-277V voltage  
0-10V dimming  
Damp location

DLC LISTED PREMIUM  
UL CERTIFIED  
5 YEAR WARRANTY


# LED STRIPLIGHT

LSF5

140  
lm/W  
EFFICIENCY



COLOR AND POWER ADJUSTABLE SWITCH



TEST BUTTON

White

FINISH



120-277V  
voltage



0-10V  
dimming



Damp  
location

## LED STRIPLIGHT WITH BATTERY BACK-UP

LED STRIPLIGHT WITH BATTERY BACK-UP is built with a tough, commercial-grade housing that resists both rust and impact. Its anti-glare PMMA lens provides steady, comfortable lighting and ensures dependable performance over many years. The fixture is also designed for modular installations, allowing several units to be linked together effortlessly with the supplied connection bracket for a seamless continuous run. Compatible with 120–277V systems, it includes a 0–10V dimmable driver to offer precise and adaptable light control.



SIZE

2ft, 4ft, 8ft



AVAILABLE POWER

20 / 24 / 28W  
22 / 28 / 36 / 44W  
48 / 68 / 90W



COLOR SELECTABLE

3500 / 4000 / 5000K



BUILT-IN BATTERY BACK-UP:  
UP TO 12W



LINKABLE DESIGN



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



COLOR AND POWER  
SELECTABLE



# LED STRIPLIGHT

## LSF5

COLOR AND POWER ADJUSTABLE SWITCH



TEST BUTTON



**140**  
lm/W  
EFFICIENCY




### REMOTE CONTROL

MICROWAVE MOTION SENSOR



ASD-RC100LCD

### MANUAL SENSOR SETTINGS

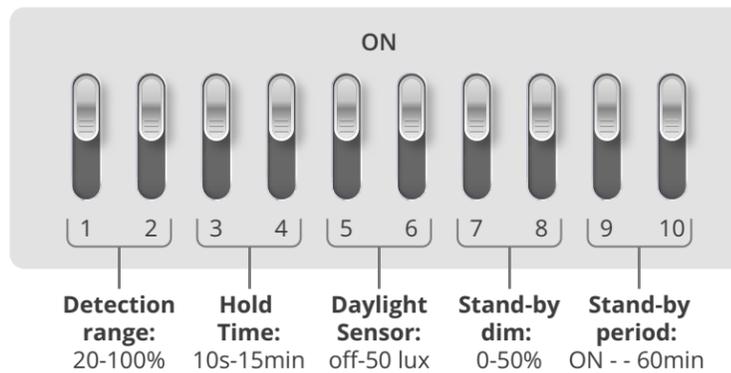

White

FINISH

# LED STRIPLIGHT WITH MOTION SENSOR AND BATTERY BACK-UP

LED STRIPLIGHT WITH MOTION SENSOR AND BATTERY BACK-UP is built with a durable, commercial-grade housing that stands up to rust and impact. Designed for broad compatibility, it operates on 120-277V circuits and includes a 0-10V dimmable driver to deliver precise, adaptable lighting control.

**SIZE**  
4ft

**AVAILABLE POWER**  
22 / 28 / 36 / 44W

**COLOR SELECTABLE**  
3500 / 4000 / 5000K

**BUILT-IN BATTERY BACK-UP: UP TO 12W**



**BUILT-IN Q-BASE MOTION SENSOR**



**LINKABLE DESIGN**




**COLOR AND POWER SELECTABLE**



# ACCESSORIES

LSF5

CONNECTION BRACKET

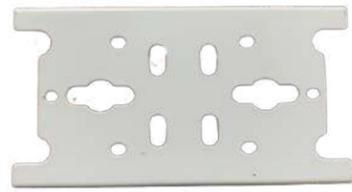

ASD-CB-LSF5

WIRE GUARD




ASD-WG4-LSF5

REMOTE CONTROL



ASD-RC100LCD



# LED WRAP LIGHT WRL

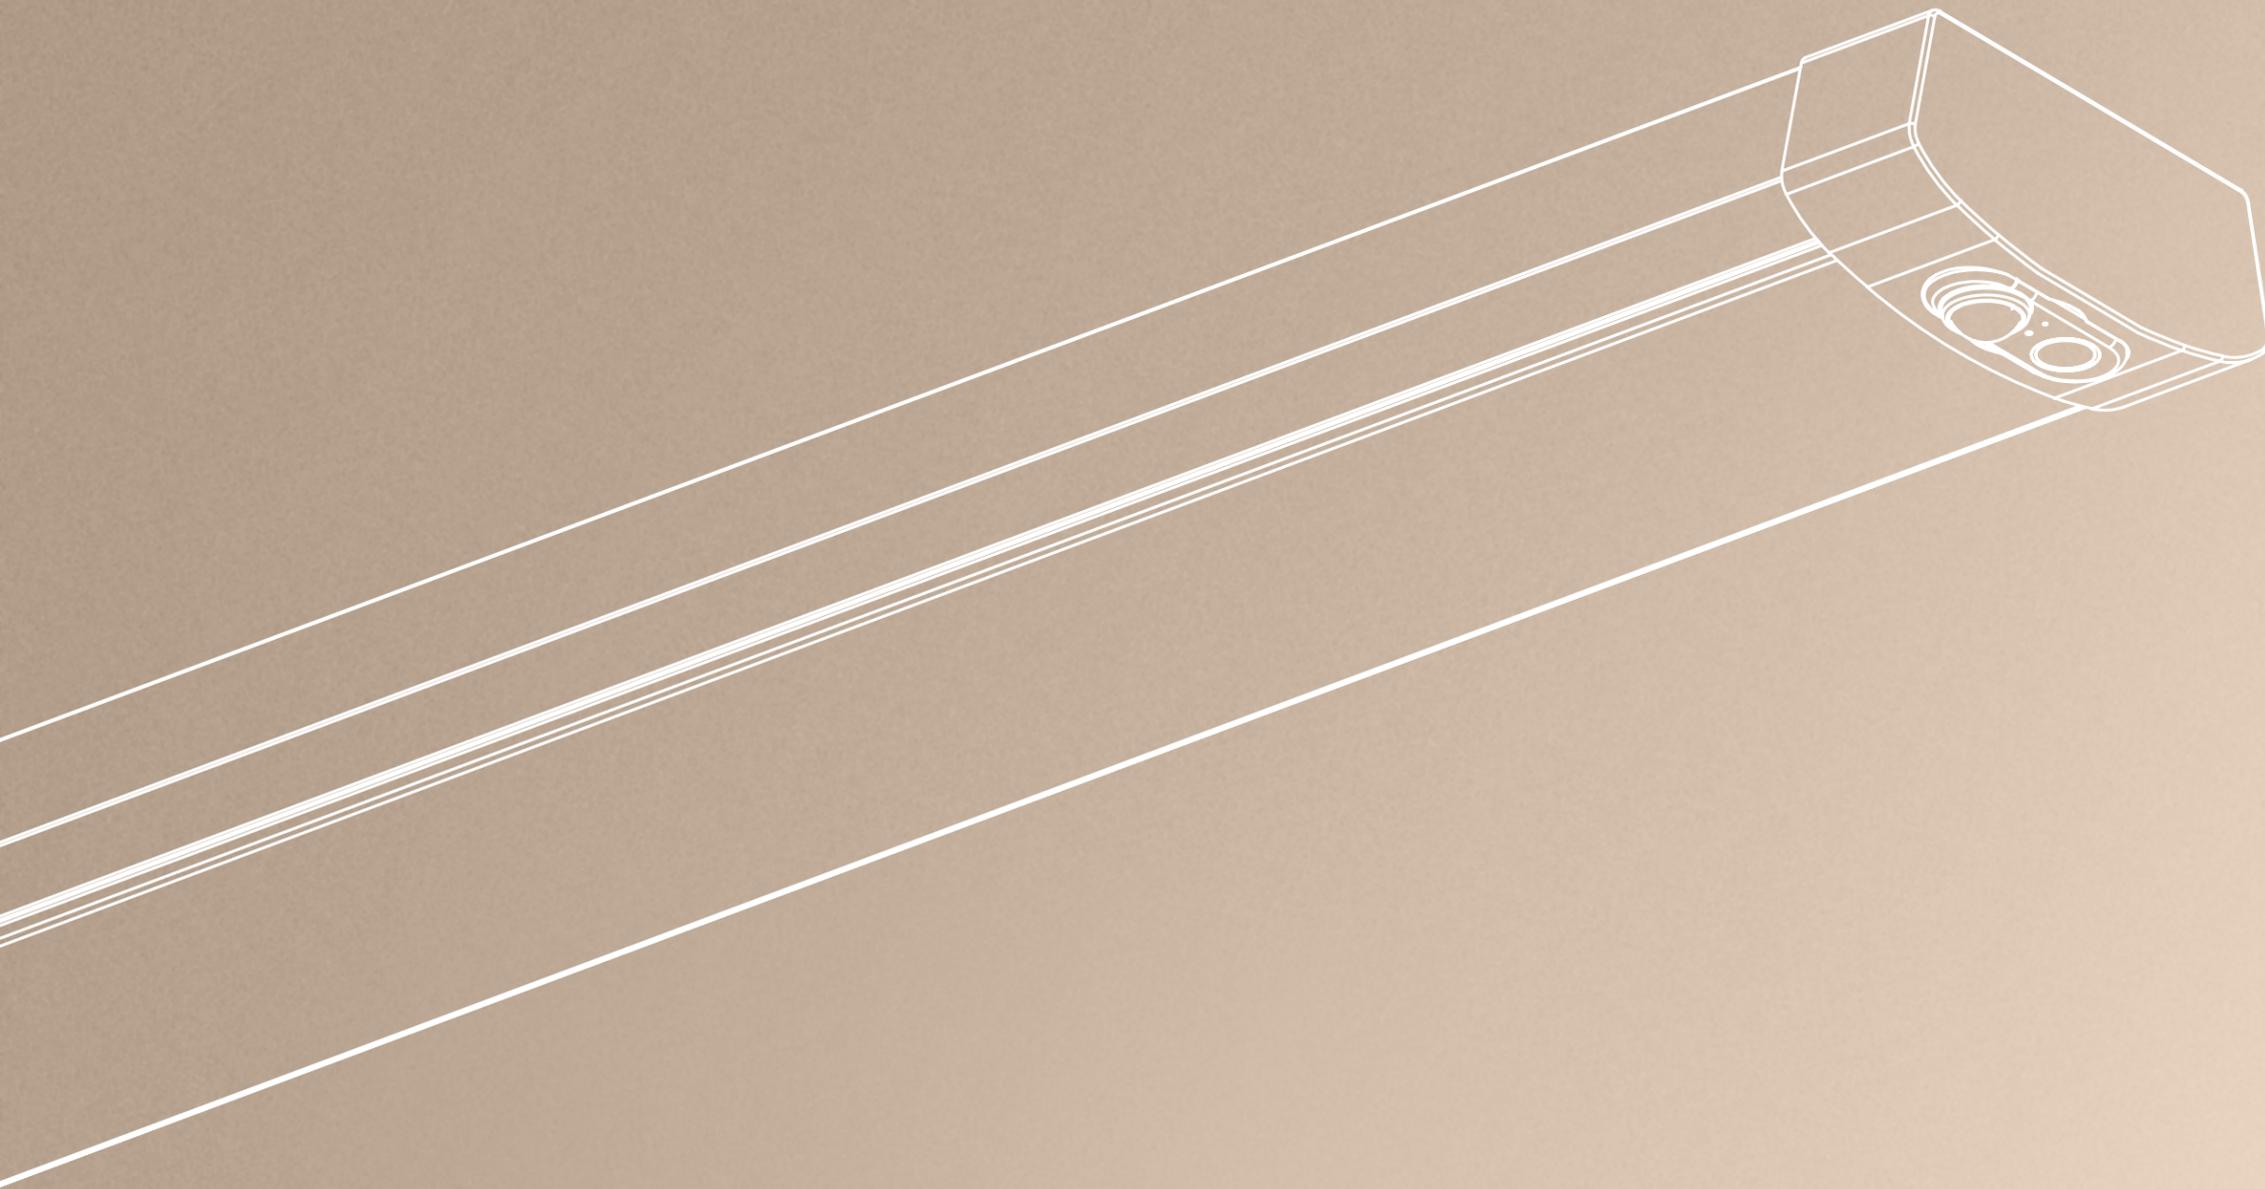

# LED WRAP LIGHT

WRL

120  
lm/W  
EFFICIENCY

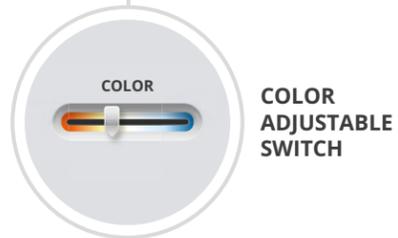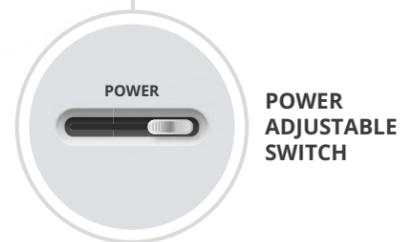

White  
FINISH



## WRAP LIGHT

LED Wrap features a durable, commercial-grade housing engineered to resist rust and impact, ensuring reliable performance in demanding environments. Paired with an anti-glare PMMA lens, it delivers smooth, even illumination while maintaining visual comfort. Designed for long-term reliability, the fixture provides many years of dependable use and is compatible with standard 120-277V circuits for versatile installation across a wide range of applications.

**SIZE**  
4ft

**AVAILABLE POWER**  
32 / 40 / 48W

**COLOR SELECTABLE**  
3500 / 4000 / 5000K

**DURABLE COMMERCIAL GRADE HOUSING RESISTANT TO RUST AND IMPACT**



**0-10V DIMMABLE**



**ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION**



**COLOR AND POWER SELECTABLE**



# LED WRAP LIGHT

WRL

120  
lm/W  
EFFICIENCY

INFRARED  
MOTION  
SENSOR

POWER

POWER  
ADJUSTABLE  
SWITCH

COLOR

COLOR  
ADJUSTABLE  
SWITCH

White

FINISH



## WRAP LIGHT WITH MOTION SENSOR

LED WRAP WITH MOTION SENSOR is built with a rugged, commercial-grade housing that resists rust and impact, complemented by an anti-glare PMMA lens that delivers consistent, comfortable illumination over long-term use. Engineered for broad compatibility, it operates smoothly on 120–277V circuits. The integrated motion sensor boosts energy efficiency and convenience by activating light only when needed, making it an excellent choice for hallways, stairwells, storage areas, and other spaces that benefit from automatic illumination.



SIZE

4ft



AVAILABLE  
POWER

32 / 40 / 48W



COLOR  
SELECTABLE

3500 / 4000 / 5000K



BUILT-IN  
MOTION SENSOR



DURABLE COMMERCIAL GRADE  
HOUSING RESISTANT TO RUST  
AND IMPACT



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



COLOR AND POWER  
SELECTABLE



POWER SELECTABLE

COLOR SELECTABLE



# LED WRAP LIGHT

WRL

**120**  
lm/W  
EFFICIENCY

**90 MIN**  
IN BATTERY  
BACK-UP MODE

RED EMERGENCY  
GREEN CHARGING

STATUS  
INDICATOR  
/TEST  
BUTTON

POWER

POWER  
ADJUSTABLE  
SWITCH

COLOR

COLOR  
ADJUSTABLE  
SWITCH

White

FINISH



120-277V  
voltage



0-10V  
dimming



Damp  
location

## WRAP LIGHT WITH BATTERY BACK-UP

LED WRAP WITH BATTERY BACK-UP features a robust, commercial-grade housing engineered to resist rust and impact, paired with an anti-glare PMMA lens that ensures reliable, comfortable illumination for years of service. Designed for versatility, it operates seamlessly on 120–277V circuits. The integrated battery back-up enhances safety by maintaining illumination during power outages, making it ideal for stairwells, corridors, and other critical areas where uninterrupted lighting is essential.



SIZE

4ft



AVAILABLE  
POWER

32 / 40 / 48W



COLOR  
SELECTABLE

3500 / 4000 / 5000K



BUILT-IN BATTERY BACK-UP:  
UP TO 12W



DURABLE COMMERCIAL GRADE  
HOUSING RESISTANT TO RUST  
AND IMPACT



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



COLOR AND POWER  
SELECTABLE



# LED WRAP LIGHT

WRL

**120**  
lm/W  
EFFICIENCY



INFRARED  
MOTION  
SENSOR

POWER

POWER  
ADJUSTABLE  
SWITCH

COLOR

COLOR  
ADJUSTABLE  
SWITCH

**90 MIN**  
IN BATTERY  
BACK-UP MODE

RED  
EMERGENCY

GREEN  
CHARGING

STATUS  
INDICATOR  
/TEST  
BUTTON

White

FINISH



## WRAP LIGHT WITH MOTION SENSOR AND BATTERY BACK-UP

LED WRAP WITH MOTION SENSOR AND BATTERY BACK-UP features a durable, rust- and impact-resistant housing with an anti-glare PMMA lens for long-lasting, comfortable illumination. Compatible with 120–277V circuits, it activates automatically via the motion sensor for energy-efficient lighting in hallways, stairwells, storage areas, and more. The built-in battery backup ensures reliable illumination during power outages, keeping spaces safe and visible when it matters most.



SIZE

4ft



AVAILABLE  
POWER

32 / 40 / 48W



COLOR  
SELECTABLE

3500 / 4000 / 5000K



BUILT-IN BATTERY BACK-UP:  
UP TO 12W



BUILT-IN  
MOTION SENSOR




COLOR AND POWER  
SELECTABLE



ANTI-GLARE PMMA LENS WITH  
EVEN LIGHT DISTRIBUTION



# LED WRAP LIGHT WRL2

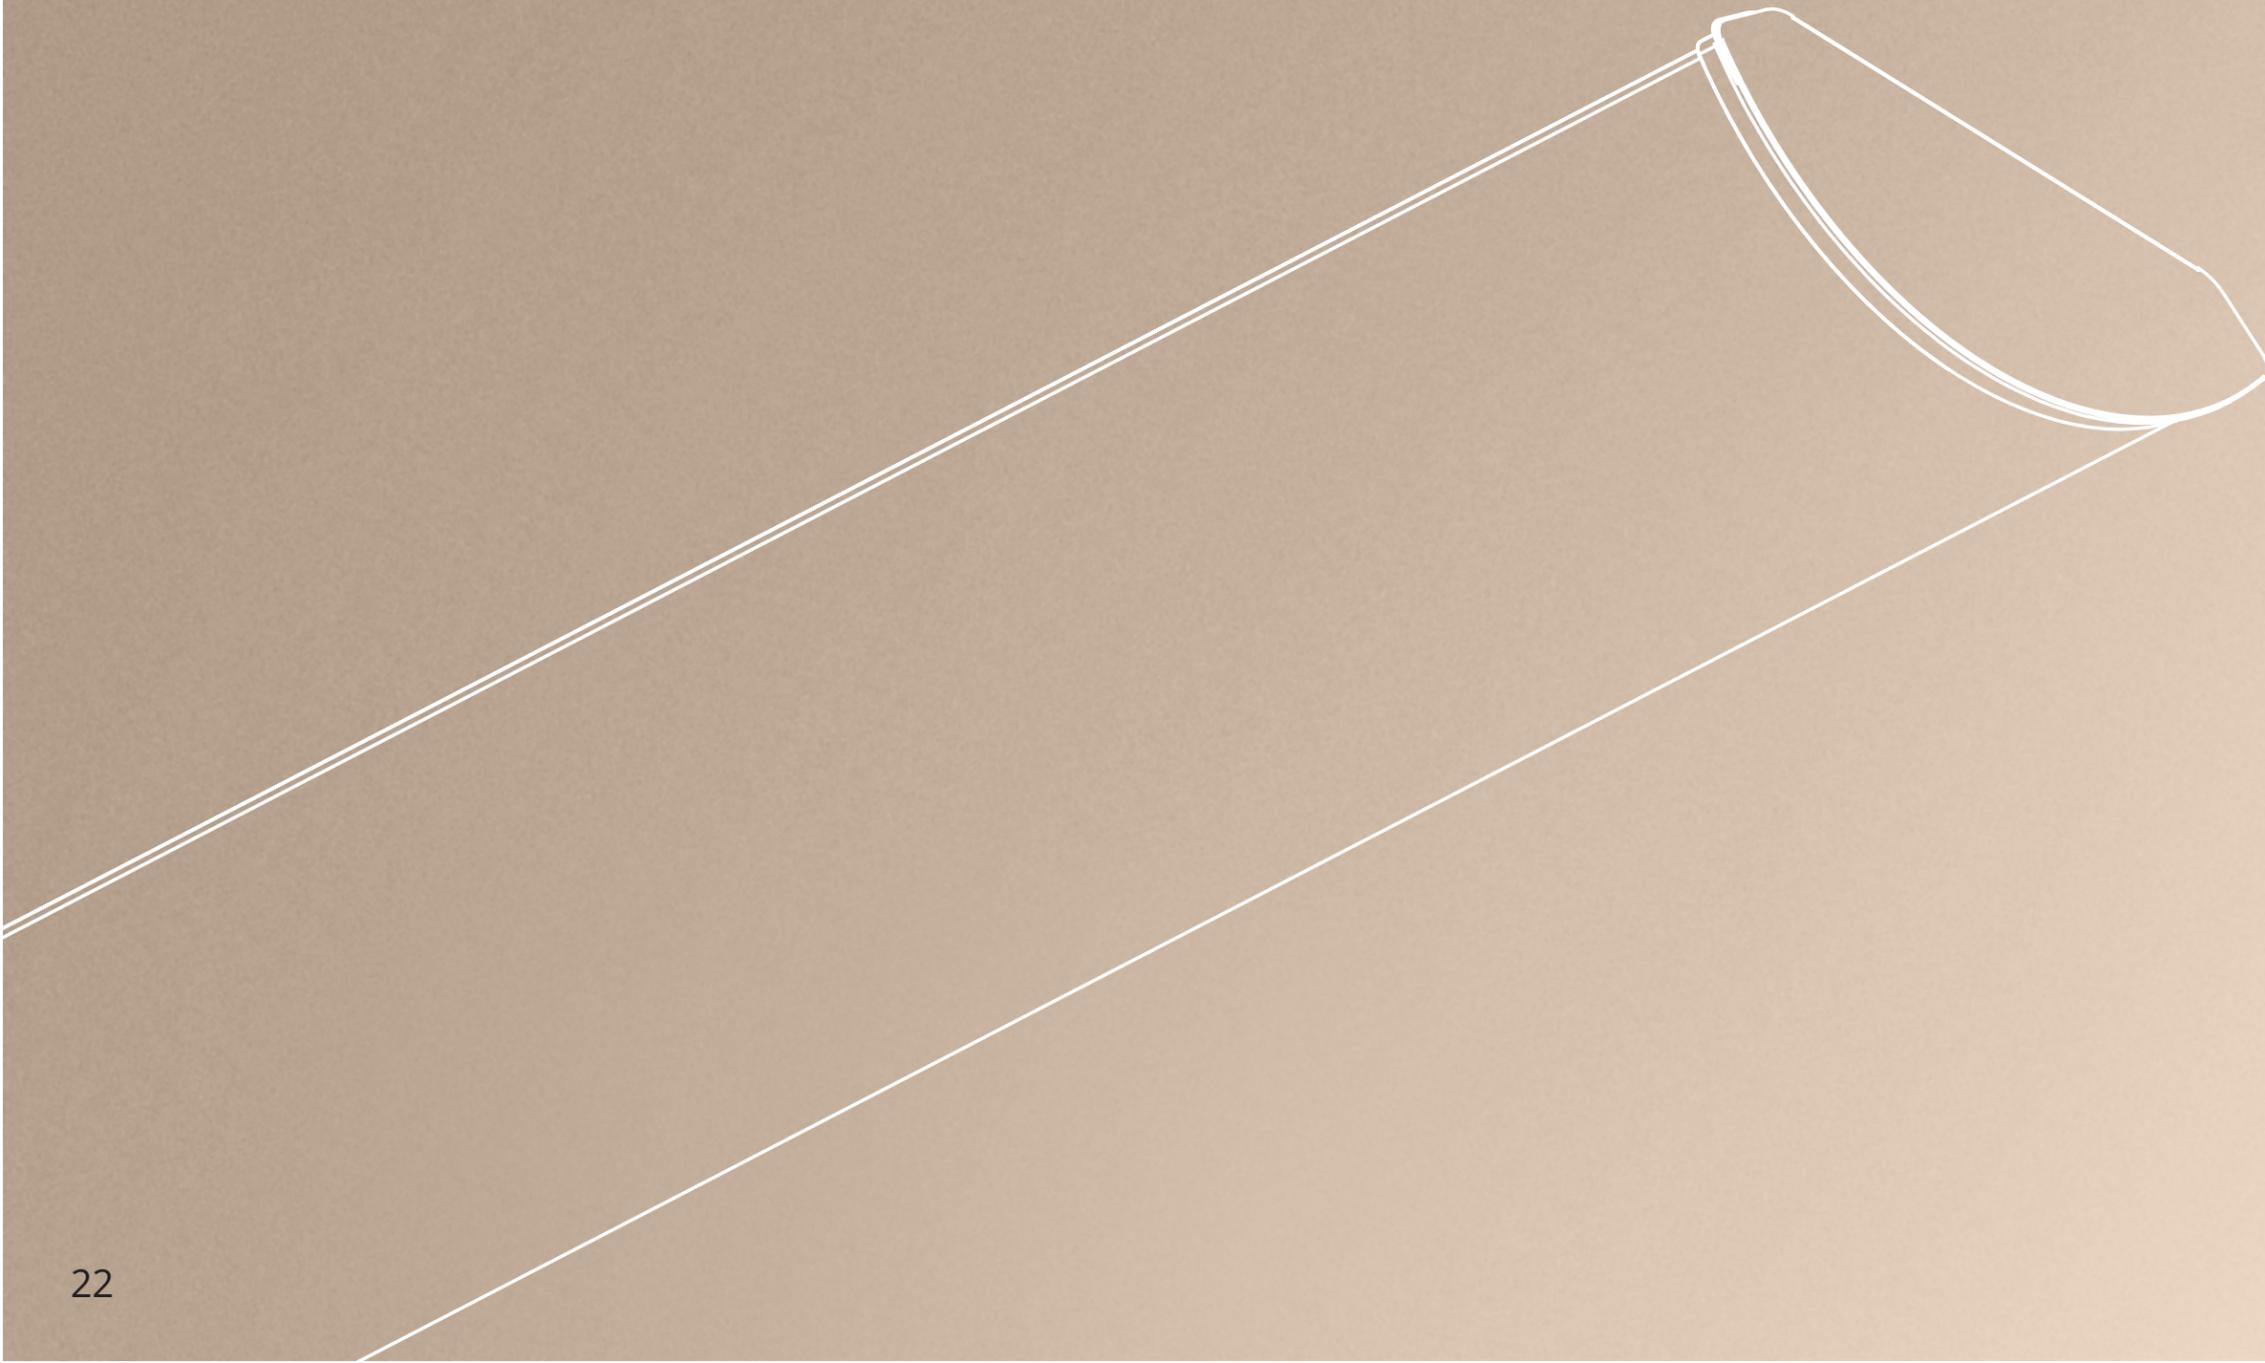


# LED WRAP LIGHT

WRL2

150  
lm/W  
EFFICIENCY

9-3/4"  
WIDTH

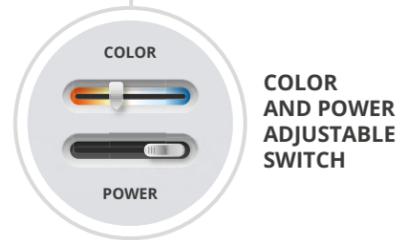

White

FINISH

## WRAP LIGHT

LED WRAP WRL2 features a rugged, commercial-grade housing resistant to rust and impact, combined with an anti-glare PMMA lens for durable, comfortable illumination. Operating on 120-277V circuits, it offers high-efficiency 150 LPW and wide, uniform light distribution, ideal for diverse commercial and industrial applications.

**SIZE**  
4ft

**AVAILABLE POWER**  
32 / 40 / 48W

**COLOR SELECTABLE**  
3500 / 4000 / 5000K

**ANTI-GLARE PMMA LENS WITH EVEN LIGHT DISTRIBUTION**



**150LM/W EFFICIENCY**



**COLOR AND POWER SELECTABLE**




**DURABLE COMMERCIAL GRADE HOUSING RESISTANT TO RUST AND IMPACT**



# LED VAPOR LIGHT

## LVP2SM

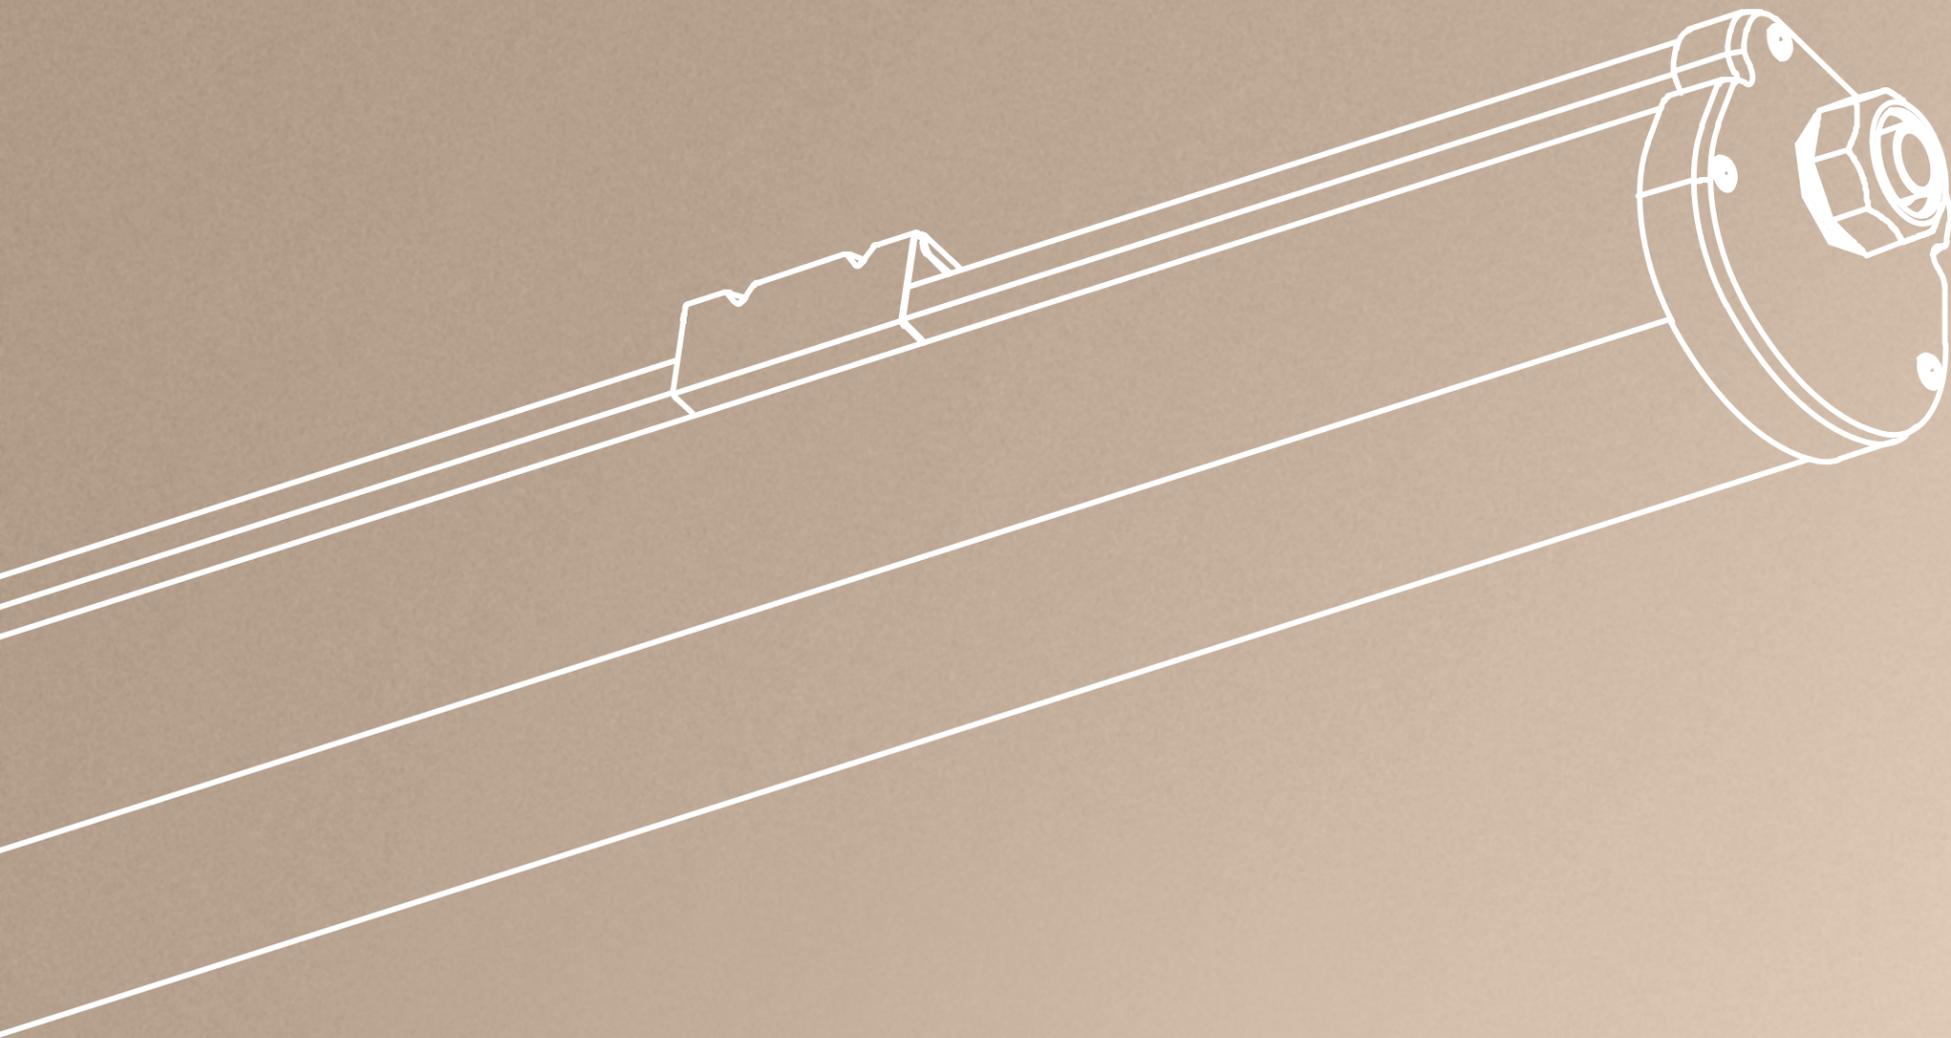


# LED VAPOR LIGHT

LVP2SM



**125**  
lm/W  
EFFICIENCY



COLOR  
AND POWER  
ADJUSTABLE  
SWITCH

White

FINISH



## VAPOR LIGHT

LED SEAMLESS VAPOR PROOF FIXTURE has a waterproof polycarbonate body with a frosted lens, making this fixture impact resistant. The design of the fixture allows for daisy chaining multiple fixtures together. It is designed to operate on 120-277V circuits with a 0-10V dimmable driver and includes built-in 6KV surge protection for enhanced electrical safety.



SIZE

2ft, 4ft, 8ft



AVAILABLE POWER

16 / 24 / 28W  
32 / 48 / 56W  
64 / 96 / 120W



COLOR  
SELECTABLE

3500 / 4000 / 5000K



COLOR AND POWER  
SELECTABLE



LINKABLE  
DESIGN



SEAMLESS IMPACT-RESISTANT  
POLYCARBONATE BODY



SURGE PROTECTION AGAINST  
VOLTAGE SPIKES AND CURRENT  
SURGES



# LED VAPOR LIGHT

LVP2SM

125  
lm/W  
EFFICIENCY

MICROWAVE  
MOTION  
SENSOR

COLOR  
AND POWER  
ADJUSTABLE  
SWITCH

White

FINISH



## VAPOR LIGHT WITH MOTION SENSOR

LED SEAMLESS VAPOR PROOF FIXTURE WITH MOTION SENSOR is built with a rugged, waterproof polycarbonate body and frosted lens for durable, impact-resistant performance. Its seamless design allows easy daisy-chaining, and it runs on 120–277V circuits with a 0–10V dimmable driver. The integrated motion sensor enhances efficiency by activating light only when movement is detected.

**SIZE**  
4ft

**AVAILABLE POWER**  
32 / 48 / 56W

**COLOR SELECTABLE**  
3500 / 4000 / 5000K

**BUILT-IN MOTION SENSOR**



**LINKABLE DESIGN**



**SEAMLESS IMPACT-RESISTANT POLYCARBONATE BODY**




**COLOR AND POWER SELECTABLE**



# LED VAPOR LIGHT

## LVP2SM

**125**  
lm/W  
EFFICIENCY



COLOR  
POWER

COLOR AND POWER ADJUSTABLE SWITCH



BUILT-IN BATTERY BACK-UP

STATUS INDICATOR / TEST BUTTON

White  
**FINISH**

- 120-277V voltage
- 0-10V dimming
- Damp location

# VAPOR LIGHT WITH BATTERY BACK-UP

LED SEAMLESS VAPOR PROOF FIXTURE WITH BATTERY BACK-UP features a durable, waterproof polycarbonate body and frosted lens for reliable, impact-resistant performance. Its seamless design allows easy daisy-chaining, and it operates on 120–277V circuits with a 0–10V dimmable driver. The built-in emergency battery provides dependable lighting during power outages, ensuring safety and visibility when needed most.

- SIZE**  
4ft, 8ft
- AVAILABLE POWER**  
32 / 48 / 56W  
64 / 96 / 120W
- COLOR SELECTABLE**  
3500 / 4000 / 5000K

**BUILT-IN BATTERY BACK-UP: UP TO 20W**



**LINKABLE DESIGN**



**SEAMLESS IMPACT-RESISTANT POLYCARBONATE BODY**




**COLOR AND POWER SELECTABLE**



- DLC LISTED PREMIUM
- UL CERTIFIED
- 5 YEAR WARRANTY

# LED STRIPLIGHT

## LSF8

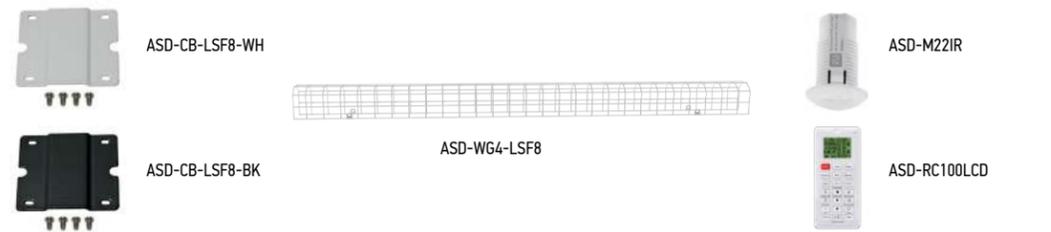

### LSF8



MODEL NAME	SIZE	WATT	INPUT VOLTAGE	LM	DIMMABLE	CCT	FINISH	LOCATION	DIMENSIONS (LxWxH)			PCS. PER CARTON	CERTIFICATION
ASD-LSF8-2A25WH	2ft	15/20/25	120-277	2021/2686/3249	0-10V	3500/4000/5000	White	Damp	24	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-4A40WH	4ft	20/30/40	120-277	3112/4569/5866	0-10V	3500/4000/5000	White	Damp	47 1/4	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-4A40BK	4ft	20/30/40	120-277	3112/4569/5866	0-10V	3500/4000/5000	Black	Damp	47 1/4	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-8A80WH	8ft	55/75/80	120-277	8560/11124/11848	0-10V	3500/4000/5000	White	Damp	94 1/2	2 11/16	3 1/8	6	UL DLC Standard
ASD-LSF8-8A80BK	8ft	55/75/80	120-277	8560/11124/11848	0-10V	3500/4000/5000	Black	Damp	94 1/2	2 11/16	3 1/8	6	UL DLC Standard
ASD-LSF8-4A70WH	4ft	50/60/70	120-277	7332/8781/9124	0-10V	3500/4000/5000	White	Damp	47 1/4	2 11/16	3 3/16	9	UL DLC Premium
ASD-LSF8-8A150WH	8ft	100/130/150	120-277	15429/19188/20263	0-10V	3500/4000/5000	White	Damp	94 1/2	2 11/16	3 3/16	6	UL DLC Premium
ASD-LSF8-2A25WH-QB	2ft	15/20/25	120-277	2028/2697/3263	0-10V	3500/4000/5000	White	Damp	24	2 11/16	3 1/4	9	UL DLC Premium
ASD-LSF8-4A40WH-QB	4ft	20/30/40	120-277	2960/4213/5395	0-10V	3500/4000/5000	White	Damp	47 1/4	2 11/16	3 1/4	9	UL DLC Premium
ASD-LSF8-8A80WH-QB	8ft	55/75/80	120-277	8280/10718/11386	0-10V	3500/4000/5000	White	Damp	94 1/2	2 11/16	3 1/4	6	UL DLC Standard
ASD-LSF8-2A25WH-8EM	2ft	15/20/25	120-277	2021/2686/3249	0-10V	3500/4000/5000	White	Damp	24	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-4A40WH-10EM	4ft	20/30/40	120-277	3112/4569/5866	0-10V	3500/4000/5000	White	Damp	47 1/4	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-4A40BK-10EM	4ft	20/30/40	120-277	3112/4569/5866	0-10V	3500/4000/5000	Black	Damp	47 1/4	2 11/16	3 1/8	9	UL DLC Premium
ASD-LSF8-8A80WH-15EM	8ft	55/75/80	120-277	8560/11124/11848	0-10V	3500/4000/5000	White	Damp	94 1/2	2 11/16	3 1/8	6	UL DLC Standard
ASD-LSF8-8A80BK-15EM	8ft	55/75/80	120-277	8560/11124/11848	0-10V	3500/4000/5000	Black	Damp	94 1/2	2 11/16	3 1/8	6	UL DLC Standard
ASD-LSF8-2A25WH-QB-8EM	2ft	15/20/25	120-277	2028/2697/3263	0-10V	3500/4000/5000	White	Damp	24	2 11/16	3 1/4	9	UL DLC Premium
ASD-LSF8-4A40WH-QB-10EM	4ft	20/30/40	120-277	2960/4213/5395	0-10V	3500/4000/5000	White	Damp	47 1/4	2 11/16	3 1/4	9	UL DLC Premium
ASD-LSF8-8A80WH-QB-15EM	8ft	55/75/80	120-277	8280/10718/11386	0-10V	3500/4000/5000	White	Damp	94 1/2	2 11/16	3 1/4	6	UL DLC Standard
ASD-LSF8-4A40SM-WH-RGBW	4ft	40	120-277	5767	SMART APP	5000	White	Damp	47 1/4	2 11/16	3 3/16	9	UL

### LSF8 ACCESSORIES

MODEL NAME	DESCRIPTION	FINISH	DIMENSIONS LxWxH			PCS. PER CARTON
ASD-CB-LSF8-WH	CONNECTION BRACKET FOR LSF8 WHITE	White	2 3/16	2 3/16	1/16	100
ASD-CB-LSF8-BK	CONNECTION BRACKET FOR LSF8 BLACK	Black	2 3/16	2 3/16	1/16	100
ASD-WG4-LSF8	ASD WIRE GUARD FOR 4FEET LED STRIPLIGHT FIXTURE LSF8	White	47 1/16	3 3/16	3 1/4	10
ASD-M22IR	Infrared Motion Sensor	White	1 7/8	1 3/16	1 3/16	200
ASD-RC100LCD	Remote Control	White	5 13/16	2 3/4	1	80

# LED STRIPLIGHT

## LSF5

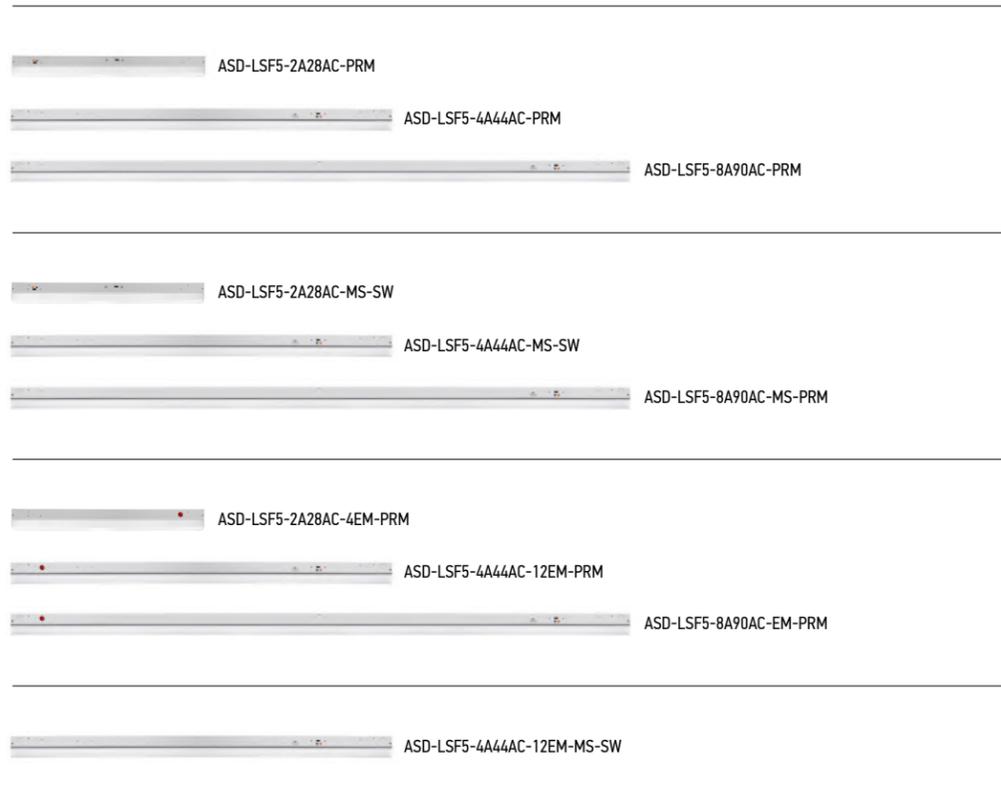

### LSF5

MODEL NAME	SIZE	WATT	INPUT VOLTAGE	LM	DIMMABLE	CCT	FINISH	LOCATION	DIMENSIONS (LxWxH)			PCS. PER CARTON	CERTIFICATION
ASD-LSF5-2A28AC-PRM	2ft	20/24/28	120-277	2646/3325/3890	0-10V	3500/4000/5000	White	Damp	26 3/16	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-4A44AC-PRM	4ft	22/28/36/44	120-277	3205/3969/5045/5853	0-10V	3500/4000/5000	White	Damp	46 5/8	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-8A90AC-PRM	8ft	48/68/90	120-277	6390/9254/12523	0-10V	3500/4000/5000	White	Damp	92 13/16	2 5/8	2 11/16	4	UL DLC Standard
ASD-LSF5-2A28AC-MS-SW	2ft	20/24/28	120-277	2646/3325/3890	0-10V	3500/4000/5000	White	Damp	26 3/16	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-4A44AC-MS-SW	4ft	22/28/36/44	120-277	3205/3969/5045/5853	0-10V	3500/4000/5000	White	Damp	46 5/8	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-8A90AC-MS-PRM	8ft	48/68/90	120-277	6390/9254/12523	0-10V	3500/4000/5000	White	Damp	92 13/16	2 5/8	2 11/16	4	UL DLC Standard
ASD-LSF5-2A28AC-4EM-PRM	2ft	20/24/28	120-277	2646/3325/3890	0-10V	3500/4000/5000	White	Damp	26 3/16	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-4A44AC-12EM-PRM	4ft	22/28/36/44	120-277	3205/3969/5045/5853	0-10V	3500/4000/5000	White	Damp	46 5/8	2 5/8	2 11/16	8	UL DLC Standard
ASD-LSF5-8A90AC-EM-PRM	8ft	48/68/90	120-277	6390/9254/12523	0-10V	3500/4000/5000	White	Damp	92 13/16	2 5/8	2 11/16	4	UL DLC Standard
ASD-LSF5-4A44AC-12EM-MS-SW	4ft	22/28/36/44	120-277	3205/3969/5045/5853	0-10V	3500/4000/5000	White	Damp	46 5/8	2 5/8	2 11/16	8	UL DLC Standard

### LSF5 ACCESSORIES

MODEL NAME	DESCRIPTION	FINISH	DIMENSIONS LxWxH			PCS. PER CARTON
ASD-CB-LSF5	ASD CONNECTION BRACKET FOR LED STRIPLIGHT FIXTURE LSF5	White	5 1/4	2 3/4	11/16	100
ASD-WG4-LSF5	ASD WIRE GUARD FOR 4FEET LED STRIPLIGHT FIXTURE LSF5	White	46 13/16	3 1/4	2 3/8	8
ASD-RC100LCD	REMOTE CONTROL	White	5 13/16	2 3/4	1	80

# LED WRAP LIGHT

## WRL/ WRL2



ASD-WRL-4A48AC



ASD-WRL-4A48AC-8EM



ASD-WRL-4A48AC-MS



ASD-WRL-4A48AC-MS-8EM



ASD-RC100LCD



ASD-WRL2-4A45AC

### WRL

MODEL NAME	SIZE	WATT	INPUT VOLTAGE	LM	DIMMABLE	CCT	FINISH	LOCATION	DIMENSIONS (LxWxH)			PCS. PER CARTON	CERTIFICATION
ASD-WRL-4A48AC	4ft	32/40/48	120-277	4053/4869/5583	0-10V	3500/4000/5000	White	Damp	47 5/8	5 5/16	2 1/8	4	UL DLC Standard
ASD-WRL-4A48AC-8EM	4ft	32/40/48	120-277	4053/4869/5583	0-10V	3500/4000/5000	White	Damp	47 5/8	5 5/16	2 1/8	4	UL DLC Standard
ASD-WRL-4A48AC-MS	4ft	32/40/48	120-277	4053/4869/5583	0-10V	3500/4000/5000	White	Damp	47 5/8	5 5/16	2 1/8	4	UL DLC Premium
ASD-WRL-4A48AC-MS-8EM	4ft	32/40/48	120-277	4053/4869/5583	0-10V	3500/4000/5000	White	Damp	47 5/8	5 5/16	2 1/8	4	UL DLC Premium

### WRL ACCESSORIES

MODEL NAME	DESCRIPTION	FINISH	DIMENSIONS LxWxH			PCS. PER CARTON
ASD-RC100LCD	REMOTE CONTROL	White	5 13/16	2 3/4	1	80

### WRL2

MODEL NAME	SIZE	WATT	INPUT VOLTAGE	LM	DIMMABLE	CCT	FINISH	LOCATION	DIMENSIONS (LxWxH)			PCS. PER CARTON	CERTIFICATION
ASD-WRL2-4A45AC	4ft	34/38/45	120-277	4840/5444/6312	0-10V	3500/4000/5000	White	Damp	46	9 3/4	3 7/16	1	UL DLC Standard


# LED VAPOR LIGHT

## LVP2SM

 ASD-LVP2SM-2A28AC

 ASD-LVP2SM-4A56AC

 ASD-LVP2SM-8A120AC

 ASD-LVP2SM-4A56AC-10EM

 ASD-LVP2SM-8A120AC-20EM

 ASD-LVP2SM-4A56AC-MS

 ASD-RC100LCD

### LVP2SM

MODEL NAME	SIZE	WATT	INPUT VOLTAGE	LM	DIMMABLE	CCT	FINISH	LOCATION	DIMENSIONS (LxWxH)			PCS. PER CARTON	CERTIFICATION
ASD-LVP2SM-2A28AC	2ft	16/24/28	120-277	2013/2801/3019	0-10V	3500/4000/5000	White	Wet	23 9/16	3 9/16	3 3/16	9	UL DLC Standard
ASD-LVP2SM-4A56AC	4ft	32/48/56	120-277	4471/6155/7253	0-10V	3500/4000/5000	White	Wet	48 1/8	3 9/16	3 1/8	9	UL DLC Standard
ASD-LVP2SM-8A120AC	8ft	64/96/120	120-277	9258/13773/17359	0-10V	3500/4000/5000	White	Wet	94 3/4	3 9/16	3 1/8	6	UL DLC Standard
ASD-LVP2SM-4A56AC-10EM	4ft	32/48/56	120-277	4772/6109/7140	0-10V	3500/4000/5000	White	Wet	48 1/8	3 9/16	3 1/8	9	UL DLC Standard
ASD-LVP2SM-8A120AC-20EM	8ft	64/96/120	120-277	9414/14025/17325	0-10V	3500/4000/5000	White	Wet	94 3/4	3 9/16	3 1/8	6	UL DLC Standard
ASD-LVP2SM-4A56AC-MS	4ft	32/48/56	120-277	4291/5635/6330	0-10V	3500/4000/5000	White	Wet	47 3/16	3 9/16	3 3/16	9	UL DLC Standard

### LVP2SM ACCESSORIES

MODEL NAME	DESCRIPTION	FINISH	DIMENSIONS LxWxH			PCS. PER CARTON
ASD-RC100LCD	REMOTE CONTROL	White	5 13/16	2 3/4	1	80



# ASD LIGHTING CORP



ASD Lighting Corp has become one of the leading LED lighting brands in the United States for commercial and residential applications.



## QUALITY

For the production of ASD Luminaires we carefully choose the highest quality components to ensure efficiency and longevity.



## LOGISTICS

We are constantly improving our warehouse system so that delivery and storage of ASD products is not only efficient, but also fast and convenient.



*New Standard  
in Lighting!*