



LED CANOPY

*The perfect solution
for commercial spaces*



PRODUCT PRESENTATION | 2022

WWW.ASD-LIGHTING.COM



LED CANOPY



CAN05
page 6



CAN05-MS with MOTION SENSOR
page 7




CAN07
page 10



CAN07-MS with MOTION SENSOR
page 11



CAN07-EM with BATTERY BACK-UP
page 12

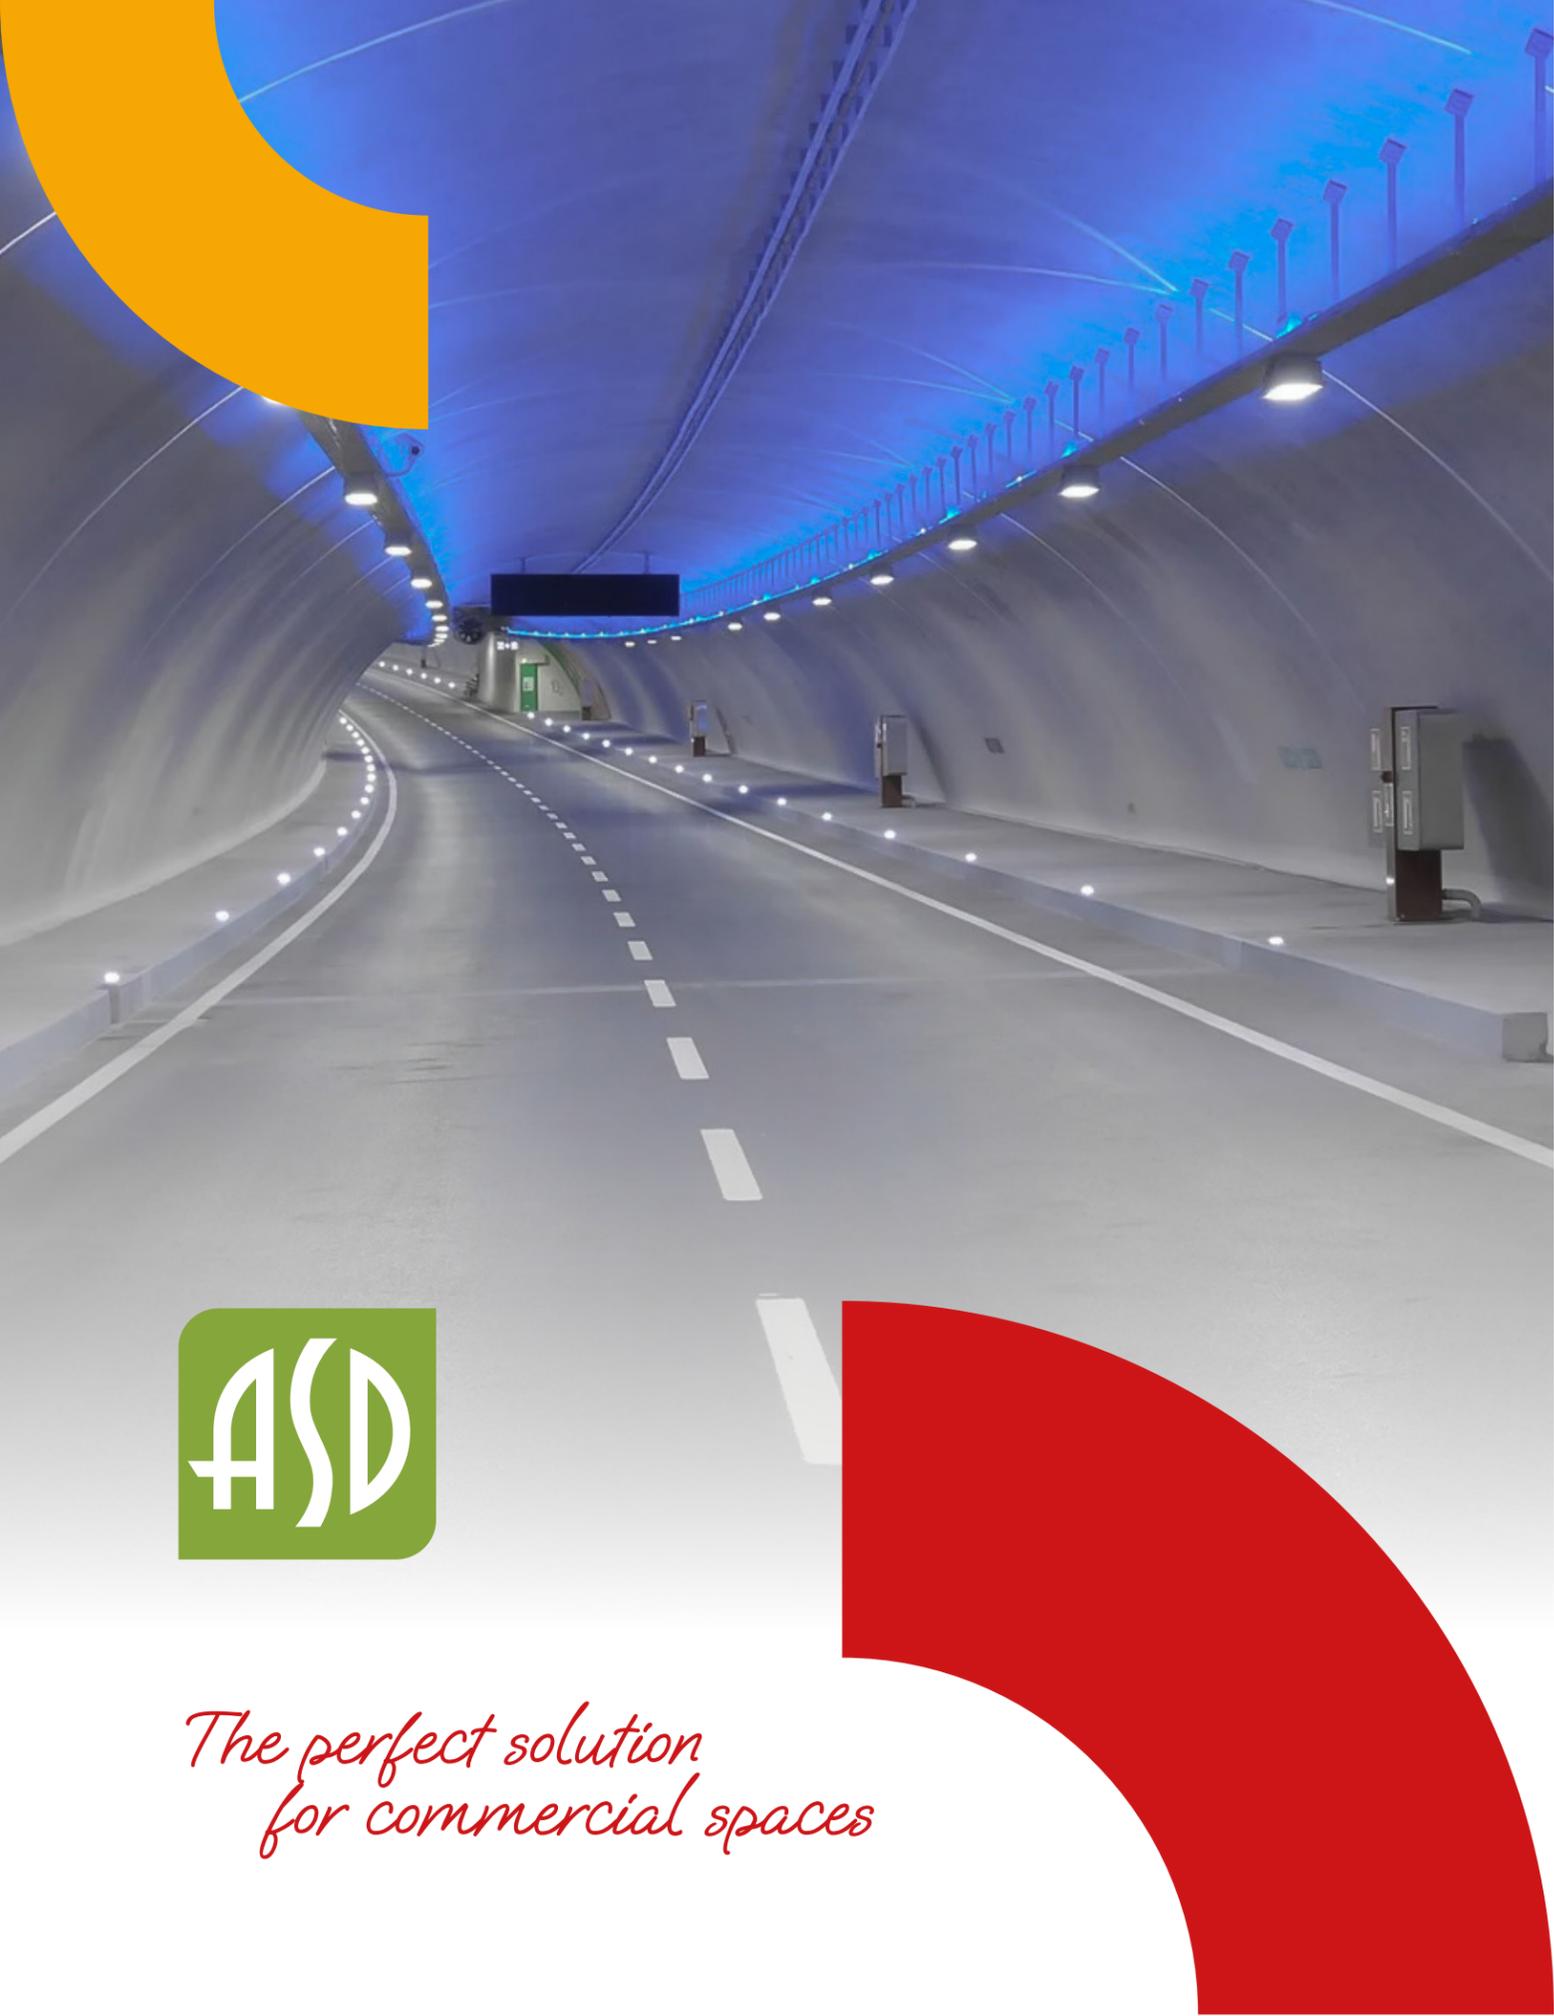

*The perfect solution
for commercial spaces*

LED CANOPY

APPLICATION

These fixtures are Wet Location and IP65 rated, allowing them to be utilized in a wide variety of applications and climates. This makes them perfect for commercial spaces such as: parking garages, gas stations, stairwells, passageways, toll booths, waiting rooms, underpasses and more.

ENERGY SAVING & EFFICIENCY

This fixture will save you a significant amount of money in its lifetime by providing high lumen output while low energy consumption.

CERTIFICATION & WARRANTY

ASD provides 5-year warranty along with UL and DLC Premium certifications to guarantee top quality products and safety, also allowing participation in rebates.

LED SLIM CANOPY

LED SLIM CANOPY is designed with rustproof, die-cast aluminum housing and finished with a UV stabilized powder coat paint. This means it is protected against fade and wear and will maintain its durability over time.

This fixture provides optimal lighting without any of the blind spots or light pollution caused by most commercial lighting fixtures.



BUILT-IN MOTION SENSOR MODELS

LED SLIM CANOPY with a built-in microwave Motion Sensor automatically turn off in the absence of motion and can be programmed via dip switch.

HOUSING

Rustproof, diecast aluminum housing with a UV stabilized powder coat paint.

INTEGRATED DOB DRIVER

Energy-efficient dimmable LED driver on board provides stable light output with economic power consumption.

MOUNTING PLATE


Has multiple holes for convenient installation and equipped with a hook to hold fixture while wiring

LEDs

Highly efficient LEDs provide more than 140 lumen per watt output.

LENS

Lens designed to maximize efficiency and provides optimal lighting without any of the blind spots.

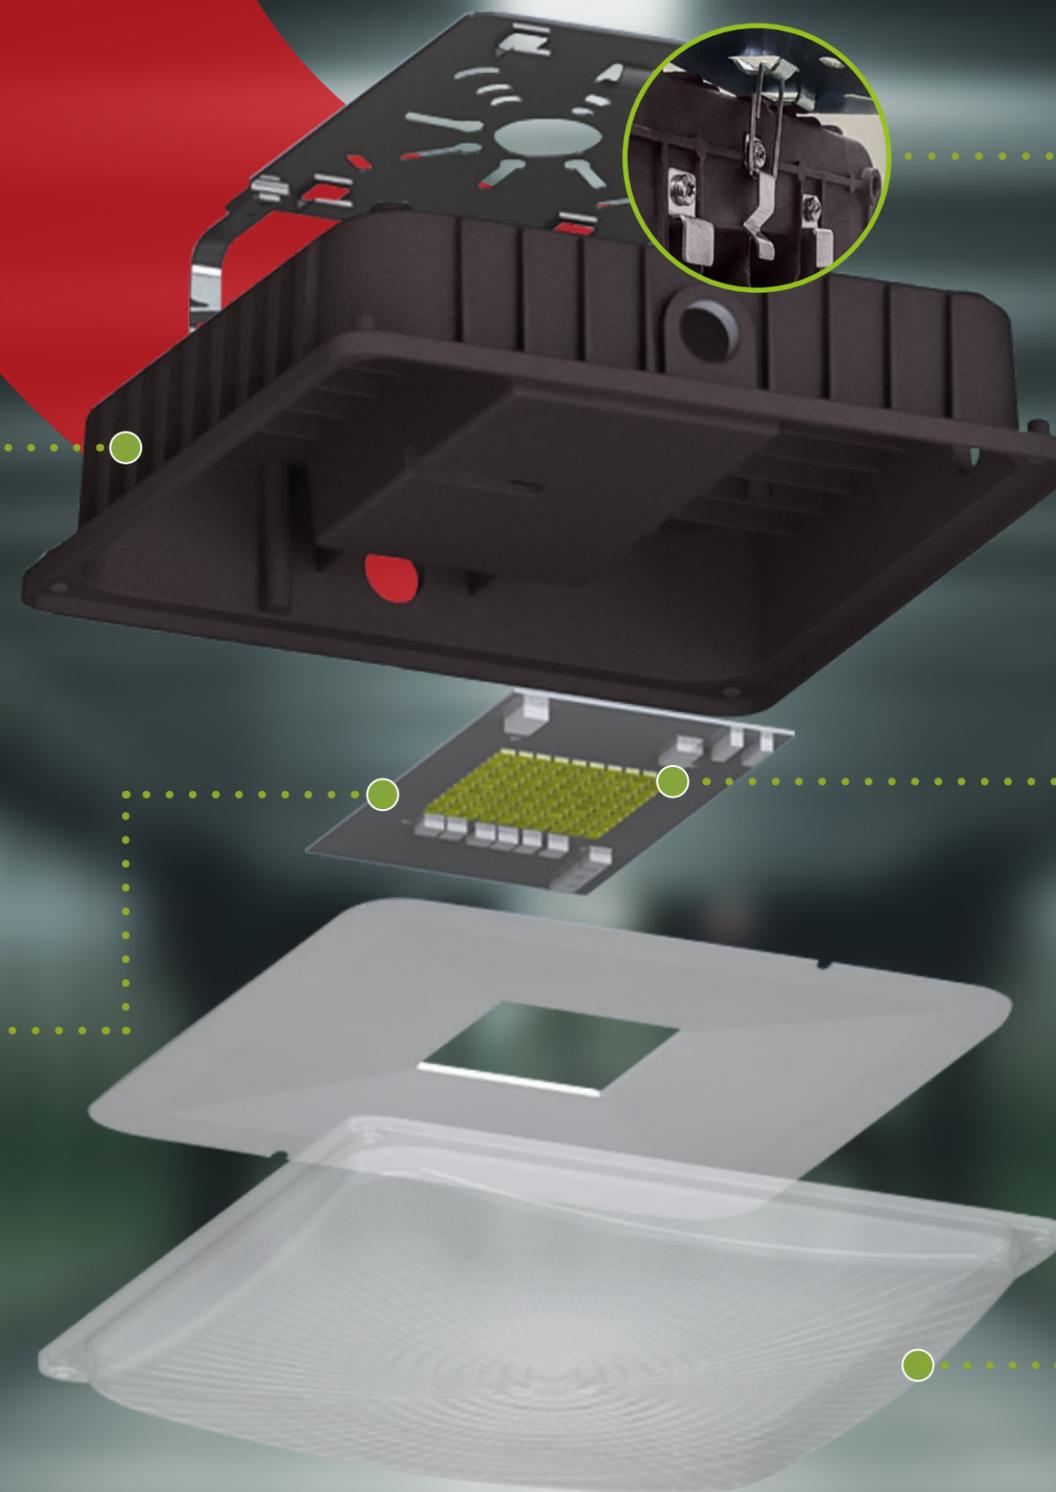

LED SLIM CANOPY



CAN05

These fixtures are IP65 rated, allowing them to be utilized in a wide variety of applications and climates. This makes them perfect for commercial spaces such as: parking garages, gas stations, stairwells, passageways, toll booths, waiting rooms, underpasses and more.

W AVAILABLE POWER

45W, 70W, 100W

K COLOR TEMPERATURE

4000K, 5000K


P DLC PARKING FIXTURE CLASSIFIED

R RUST RESISTANT POWDER COATING

5kV SURGE PROTECTION AGAINST VOLTAGE AND CURRENT SURGES

A LOW PROFILE ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION

luminous intensity distribution diagram

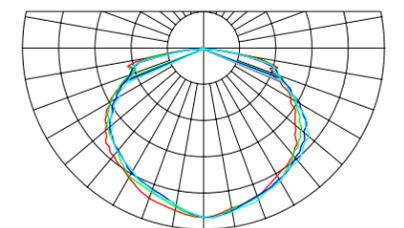

White

Bronze

⚡
120-277V
voltage

💧
Wet
location

LED SLIM CANOPY

CAN05-MS with Motion Sensor

LED SLIM CANOPY with a built-in microwave Motion Sensor automatically turns off in the absence of motion and can be programmed via dip switch.



**AVAILABLE
POWER**

45W, 70W



**COLOR
TEMPERATURE**

5000K



**DLC PARKING
FIXTURE CLASSIFIED**



**RUST RESISTANT
POWDER COATING**



**SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES**




**LOW PROFILE ALUMINUM HOUSING
WITH EXCELLENT HEAT DISSIPATION**



**BUILT-IN MOTION SENSOR
WITH DIP SWITCH CONTROL**

luminous intensity distribution diagram

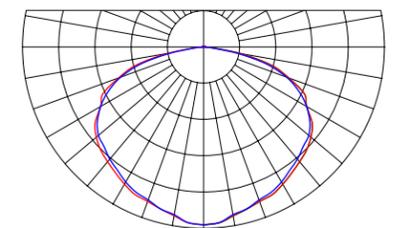

Bronze



120-277V
voltage



Wet
location

LED LOW-PROFILE CANOPY

LED LOW-PROFILE CANOPY is designed with rustproof, die-cast aluminum housing and finished with a UV stabilized powder coat paint. This means it is protected against fade and wear and will maintain its durability over time.

This fixture provides optimal illumination without any blind spots, while the lens ensures uniform lighting. It is also CCT selectable, allowing you to set it to 3,000K, 4,000K or 5,000K.



BUILT-IN MOTION SENSOR MODELS

LED LOW-PROFILE CANOPY with a built-in microwave Motion Sensor automatically turns off in the absence of motion and can be programmed via dip switch or wireless remote.

BUILT-IN BATTERY BACK-UP MODELS

LED LOW-PROFILE CANOPY with a built-in Battery Back-up provides 90 minutes of power in case of emergency.

MOUNTING PLATE

Has multiple holes for convenient installation and equipped with a hook to hold fixture while wiring

CCT SWITCH

Color temperature selectable with a simple switch.

LEDs

Highly efficient LEDs provide more than 140 lumen per watt output.

HOUSING

Rustproof, diecast aluminum housing with a UV stabilized powder coat paint.

DRIVER

Energy-efficient dimmable LED driver provides stable light output, with economic power consumption.

HINGES

Hinged design for easy wiring while mounted on a pole or plate.

LENS

Lens designed to maximize efficiency and provides optimal lighting without any of the blind spots.



LED LOW-PROFILE CANOPY



CAN07

LED LOW-PROFILE CANOPY is designed with rustproof, die-cast aluminum housing and finished with a UV stabilized powder coat paint. This means it is protected against fade and wear and will maintain its durability over time. This fixture provides optimal illumination without any blind spots, while the lens ensures uniform lighting. It is also CCT selectable, allowing you to set it to 3,000K, 4,000K or 5,000K.



**AVAILABLE
POWER**

45W, 70W



**COLOR
SELECTABLE**

3000K, 4000K, 5000K



**DLC PARKING
FIXTURE CLASSIFIED**



**RUST RESISTANT
POWDER COATING**




**SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES**



**LOW-PROFILE DESIGN MAKES IT AN
IDEAL SOLUTION FOR LOW CEILINGS**

luminous intensity distribution diagram

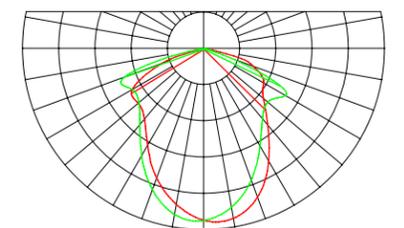

Bronze



120-277V
voltage



Wet
location

LED LOW-PROFILE CANOPY

CAN07-MS with Motion Sensor

LED LOW-PROFILE CANOPY with a built-in microwave Motion Sensor automatically turns off in the absence of motion and can be programmed via dip switch or wireless remote (sold separately).



**AVAILABLE
POWER**

45W



**COLOR
SELECTABLE**

3000K, 4000K, 5000K



**DLC PARKING
FIXTURE CLASSIFIED**



**RUST RESISTANT
POWDER COATING**



**SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES**




**LOW-PROFILE DESIGN MAKES IT AN
IDEAL SOLUTION FOR LOW CEILINGS**



**BUILT-IN
MOTION SENSOR**

luminous intensity distribution diagram

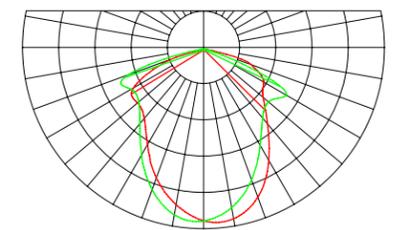

Bronze



120-277V
voltage



Wet
location

**REMOTE CONTROL
UHB-RC-MSK1**
Sold separately



LED LOW-PROFILE CANOPY

CAN07-EM with Battery Back-up

LED LOW-PROFILE CANOPY with a built-in Battery Back-up provides 90 minutes of power in case of emergency.



**AVAILABLE
POWER**

45W



**COLOR
SELECTABLE**

3000K, 4000K, 5000K



**DLC PARKING
FIXTURE CLASSIFIED**



**RUST RESISTANT
POWDER COATING**



**SURGE PROTECTION AGAINST
VOLTAGE AND CURRENT SURGES**




**LOW-PROFILE DESIGN MAKES IT AN
IDEAL SOLUTION FOR LOW CEILINGS**



**BUILT-IN
BATTERY BACK-UP**

luminous intensity distribution diagram

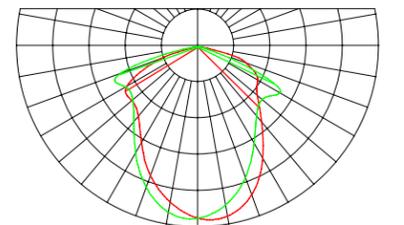


Bronze



REMOTE CONTROL

UHB-RC-MSK1

for CAN07-MS model with Motion Sensor

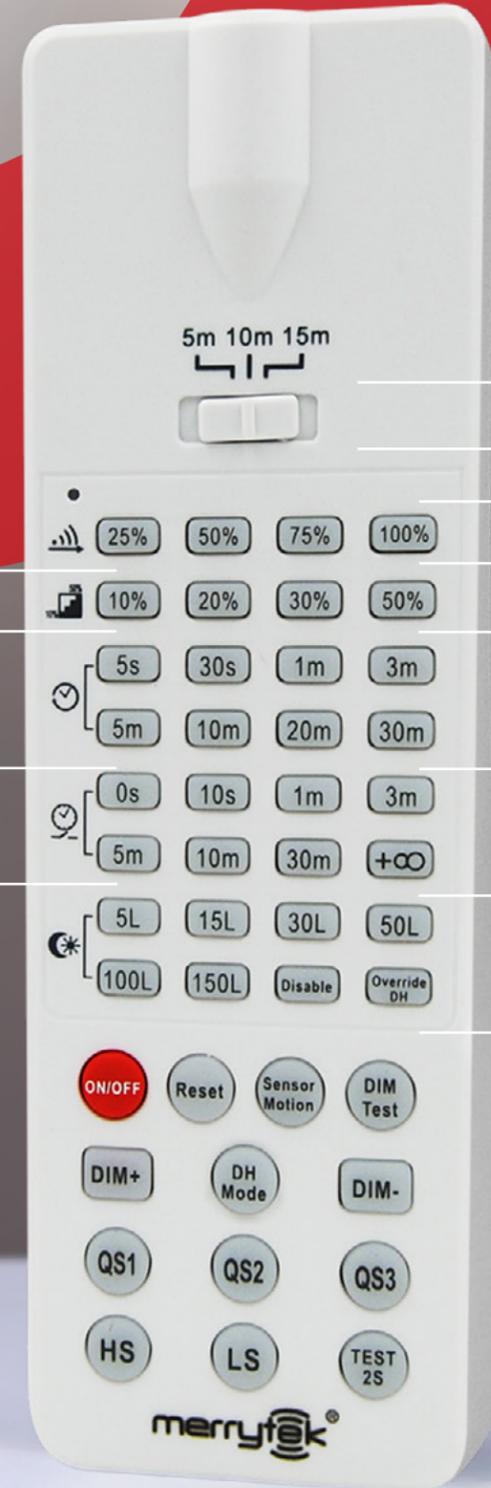

Use the toggle switch to set remote transmitting range

STAND-BY DIM LEVEL
light output level in stand-by mode

STAND-BY TIME
time the fixture remains at reduced brightness before turning off

DETECTION AREA
sensitivity of motion sensor

HOLD TIME
time the fixture will remain at full brightness after motion is detected

DAYLIGHT THRESHOLD
the ambient light level that the fixture is set to turn on or off

The motion sensor with remote control expands the fixture's capabilities, allowing you to program the lighting and adjust the brightness.

The built-in daylight sensor will automatically turn the fixture on or off depending on the ambient light level.



LED CANOPY



CAN05

Model	Input Voltage	Dimmable	Watts	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN05-45D40-BZ-PRM	120-277	0-10V	45 W	5500	4000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-45D50-BZ-PRM	120-277	0-10V	45 W	5500	5000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-45D40-WH-PRM	120-277	0-10V	45 W	5500	4000	White	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-45D50-WH-PRM	120-277	0-10V	45 W	5500	5000	White	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-70D40-BZ-PRM	120-277	0-10V	70 W	8400	4000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-70D50-BZ-PRM	120-277	0-10V	70 W	8400	5000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-70D40-WH-PRM	120-277	0-10V	70 W	8400	4000	White	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-70D50-WH-PRM	120-277	0-10V	70 W	8400	5000	White	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-100D50-BZ-PRM	120-277	0-10V	100 W	12050	5000	Bronze	11-1/6" x 11-1/6" x 3-5/8"	1	UL / DLC PRM
ASD-CAN05-100D50-WH-PRM	120-277	0-10V	100 W	12050	5000	White	11-1/6" x 11-1/6" x 3-5/8"	1	UL / DLC PRM

CAN05-MS with Motion Sensor

Model	Input Voltage	Dimmable	Watts	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN05-45D50-BZ-MS-PRM	120-277	0-10V	45 W	5500	5000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM
ASD-CAN05-70D50-BZ-MS-PRM	120-277	0-10V	70 W	8400	5000	Bronze	9-5/8" x 9-5/8" x 3-3/8"	1	ETL / DLC PRM

CAN07

Model	Input Voltage	Dimmable	Watts	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN07-45DAC-BZ	120-277	1-10 V	45 W	6230 / 6916 / 6900	3,000 / 4,000 / 5,000	Bronze	10-1/2" x 9-5/8" x 2-7/8"	6	UL / DLC PRM
ASD-CAN07-70DAC-BZ	120-277	1-10 V	70 W	8163 / 9089 / 8714	3,000 / 4,000 / 5,000	Bronze	10-1/2" x 9-5/8" x 2-7/8"	6	UL / DLC PRM

CAN07-MS with Motion Sensor

Model	Input Voltage	Dimmable	Watts	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN07-45DAC-MS-BZ	120-277	1-10 V	45 W	6230 / 6916 / 6900	3,000 / 4,000 / 5,000	Bronze	10-1/2" x 9-5/8" x 3-3/8"	6	UL / DLC PRM

CAN07-EM with Battery Back-up

Model	Input Voltage	Dimmable	Watts	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CAN07-45DAC-CA15EM-BZ	120-277	1-10 V	45 W	6230 / 6916 / 6900	3,000 / 4,000 / 5,000	Bronze	10-1/2" x 9-5/8" x 2-7/8"	6	UL / DLC PRM

Remote Control for Motion Sensor

Model	Applicable Models	Finish	Dimensions LxWxH	Pcs. per Carton
UHB-RC-MSK1	CAN07-MS 45W	White	4-1/2" x 2-1/8" x 1/2"	100



MOUNTING OPTIONS





SINCE 1999

ASD LIGHTING CORP



ASD Lighting Corp has become one of the leading LED lighting brands in the United States for commercial and residential applications.

QUALITY

For the production of ASD Luminaires we carefully choose the highest quality components to ensure efficiency and longevity.



LOGISTICS

We are constantly improving our warehouse system so that delivery and storage of ASD products is not only profitable but fast and convenient.

