



LED UFO HIGH BAY

Premium Series

► **DESIGN & OPTIONS** - LED UFO HIGH BAY LIGHTS are extremely efficient with a 130-150 lm/W output and are equipped with 0-10V dimmable drivers. Die-cast aluminum housing also provides excellent heat dissipation. You can choose either 120-277V or 200-480V with a 3500K, 4000K or 5000K color temperature. Additional options include: motion sensor kit for higher energy savings, battery back-up with 90 min of power, and different types of reflectors and lenses (sold separately). Comes with a BLACK or WHITE finish.

► **INSTALLATION** - This fixture has three different mounting options: suspended, surface, and pendant. It can easily be suspended from the ceiling with the included hanging ring. Surface and pendant mount brackets are also available (sold separately). Refer to install instructions for detailed steps.

► **APPLICATION** - These lights are the perfect commercial or industrial solution for warehouses, supermarkets, retail stores, gyms, garages, general task areas, and many other applications. This fixture is Wet location rated and IP69K certified and is resistant to high pressure, temperature, water, and dust. These LED UFO HIGH BAY LIGHTS can operate in temperatures between -40+149°F (-40+65°C), allowing them to be utilized in a wide variety of applications and climates.

► **ENERGY SAVING & EFFICIENCY** - This fixture provides a lumen output equal to MH/HPS and can cut your electric bill by up to 80% instantly. With a lifespan of 54,000 hours, these fixtures are made to last decades under normal operation! This fixture will save you a significant amount of money in its lifetime.

► **CERTIFICATION & WARRANTY** - Buy with confidence: ASD provides a 5-year warranty along with UL and DLC Premium and Standard certifications to guarantee top quality products and safety!
Top US certifications allow participation in rebates; please check the rebate programs available in your state.

Catalog number	
Notes	
Type	



Finish: Black
White

PRODUCT LEGEND:

Family	Modification	Voltage	Watts	Dimmable	CCT	Finish	Series
ASD-UHB	2	XX	XXX	D	XX	X	XXX
LED UFO High Bay		Blank = Regular	100 = 100 W	Dimmable	35 = 3,500 K	Blank = Black	PRM = Premium
		HV = High Voltage	150 = 150 W		40 = 4,000 K	W = White	
			200 = 200 W		50 = 5,000 K		

LED UFO HIGH BAY FIXTURE:

Model	Watts	Voltage	Dimming	Lumens	CCT	Finish	Dimensions (LxWxH)	Cord
ASD-UHB2-100D35-PRM	100 W	120-277 V	1-10 V	15,066 lm	3,500 K	Black	10 1/4" x 10 1/4" x 6 1/4"	4 ft
ASD-UHB2-150D35-PRM	150 W	120-277 V	1-10 V	22,284 lm	3,500 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-200D35-PRM	200 W	120-277 V	1-10 V	29,247 lm	3,500 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-100D40W-PRM	100 W	120-277 V	1-10 V	15,111 lm	4,000 K	White	10 1/4" x 10 1/4" x 6 1/4"	4 ft
ASD-UHB2-100D50-PRM	100 W	120-277 V	1-10 V	15,384 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 1/4"	4 ft
ASD-UHB2-100D50W-PRM	100 W	120-277 V	1-10 V	15,384 lm	5,000 K	White	10 1/4" x 10 1/4" x 6 1/4"	4 ft
ASD-UHB2-150D40W-PRM	150 W	120-277 V	1-10 V	22,415 lm	4,000 K	White	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-150D50-PRM	150 W	120-277 V	1-10 V	22,829 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-150D50W-PRM	150 W	120-277 V	1-10 V	22,829 lm	5,000 K	White	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-200D40W-PRM	200 W	120-277 V	1-10 V	29,757 lm	4,000 K	White	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-200D50-PRM	200 W	120-277 V	1-10 V	30,404 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-200D50W-PRM	200 W	120-277 V	1-10 V	30,404 lm	5,000 K	White	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2-240D50-PRM	240 W	120-277 V	1-10 V	36,702 lm	5,000 K	Black	12 9/16" x 12 9/16" x 6 3/4"	4 ft
ASD-UHB2-240D50W-PRM	240 W	120-277 V	1-10 V	36,702 lm	5,000 K	White	12 9/16" x 12 9/16" x 6 3/4"	4 ft
ASD-UHB2-300D50-PRM	300 W	120-277 V	1-10 V	44,227 lm	5,000 K	Black	12 9/16" x 12 9/16" x 7 3/4"	4 ft
ASD-UHB2HV-100D50-PRM	100 W	347-480 V	0-10 V	15,998 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 1/4"	4 ft
ASD-UHB2HV-150D50-PRM	150 W	347-480 V	0-10 V	22,922 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2HV-200D50-PRM	200 W	347-480 V	0-10 V	30,637 lm	5,000 K	Black	10 1/4" x 10 1/4" x 6 7/8"	4 ft
ASD-UHB2HV-240D50-PRM	240 W	347-480 V	0-10 V	35,944 lm	5,000 K	Black	12 9/16" x 12 9/16" x 6 3/4"	4 ft

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series


PRODUCT SPECIFICATIONS:

Construction & Materials																			
Housing	Die cast Aluminum																		
Finish	Black, White																		
Weight	ASD-UHB2-100D35-PRM	6 lb (2.7 kg)	ASD-UHB2-150D40W-PRM	6.1 lb (2.8 kg)	ASD-UHB2-240D50-PRM	7.6 lb (3.5 kg)	ASD-UHB2HV-100D50-PRM		6.5 lb (3 kg)										
	ASD-UHB2-150D35-PRM	6.1 lb (2.8 kg)	ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM	ASD-UHB2HV-150D50-PRM	9.6 lb (4.3 kg)		ASD-UHB2HV-200D50-PRM	8.1 lb (3.7 kg)									
	ASD-UHB2-200D35-PRM		ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM	ASD-UHB2HV-200D50-PRM													
	ASD-UHB2-100D40W-PRM		ASD-UHB2-200D40W-PRM						ASD-UHB2HV-240D50-PRM		9.1 lb (4.2 kg)								
	ASD-UHB2-100D50-PRM	6 lb (2.7 kg)	ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Environmental System																			
Work Environment	Suitable for Wet Locations, IP65/69K																		
Operating Temperature	-40°F to 149°F / -40°C to 65°C *																		
L-70 Life	R > 54,000 hrs; C > 145,000 hrs																		
Optical System																			
Luminous Flux	ASD-UHB2-100D35-PRM	15,066 lm	ASD-UHB2-150D40W-PRM	22,415 lm	ASD-UHB2-240D50-PRM	36,702 lm	ASD-UHB2HV-100D50-PRM		15,998 lm										
	ASD-UHB2-150D35-PRM	22,284 lm	ASD-UHB2-150D50-PRM	22,829 lm	ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM		22,922 lm										
	ASD-UHB2-200D35-PRM	29,247 lm	ASD-UHB2-150D50W-PRM	29,757 lm	ASD-UHB2-300D50-PRM		44,227 lm		ASD-UHB2HV-200D50-PRM	30,637 lm									
	ASD-UHB2-100D40W-PRM	15,111 lm	ASD-UHB2-200D40W-PRM				ASD-UHB2HV-240D50-PRM		35,944 lm										
	ASD-UHB2-100D50-PRM	15,384 lm	ASD-UHB2-200D50-PRM	30,404 lm															
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Color Temperature	3,500 K; 4,000 K; 5,000 K																		
CRI	> 70																		
Electrical System																			
Input Voltage	Regular Voltage 120-277 V						High Voltage 347-480VAC												
Max input current	ASD-UHB2-100D35-PRM	1.2 A	ASD-UHB2-150D40W-PRM	1.8 A	ASD-UHB2-240D50-PRM	2.8 A	ASD-UHB2HV-100D50-PRM		1.2 A										
	ASD-UHB2-150D35-PRM	1.8 A	ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM		1.8 A										
	ASD-UHB2-200D35-PRM	2.4 A	ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM		3.6 A		ASD-UHB2HV-200D50-PRM	2.4 A									
	ASD-UHB2-100D40W-PRM	1.2 A	ASD-UHB2-200D40W-PRM	2.4 A			ASD-UHB2HV-240D50-PRM		2.8 A										
	ASD-UHB2-100D50-PRM		ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Inrush current (Action time)	ASD-UHB2-100D35-PRM	60 A (0.5 S)	ASD-UHB2-150D40W-PRM	60 A (0.5 S)	ASD-UHB2-240D50-PRM	60 A (0.5 S)	ASD-UHB2HV-100D50-PRM	60 A (0.5 S)											
	ASD-UHB2-150D35-PRM		ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM												
	ASD-UHB2-200D35-PRM		ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM		ASD-UHB2HV-200D50-PRM												
	ASD-UHB2-100D40W-PRM		ASD-UHB2-200D40W-PRM				ASD-UHB2HV-240D50-PRM												
	ASD-UHB2-100D50-PRM		ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
AC input range	Regular Voltage min 90 V max 305 V									High Voltage min 249 V max 528 V									
Off State Power	0 W																		
Power Consumption	ASD-UHB2-100D35-PRM	100 W	ASD-UHB2-150D40W-PRM	150 W	ASD-UHB2-240D50-PRM	240 W	ASD-UHB2HV-100D50-PRM		100 W										
	ASD-UHB2-150D35-PRM	150 W	ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM		150 W										
	ASD-UHB2-200D35-PRM	200 W	ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM		ASD-UHB2HV-200D50-PRM		200 W										
	ASD-UHB2-100D40W-PRM	100 W	ASD-UHB2-200D40W-PRM	200 W			ASD-UHB2HV-240D50-PRM		240 W										
	ASD-UHB2-100D50-PRM		ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Power Factor	> 0.9																		
Output voltage	ASD-UHB2-100D35-PRM	90-130 V	ASD-UHB2-150D40W-PRM	180-260 V	ASD-UHB2-240D50-PRM	180-260 V	ASD-UHB2HV-100D50-PRM		22-56 V										
	ASD-UHB2-150D35-PRM	180-260 V	ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM												
	ASD-UHB2-200D35-PRM		ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM		ASD-UHB2HV-200D50-PRM		32-56 V										
	ASD-UHB2-100D40W-PRM		ASD-UHB2-200D40W-PRM		28-56 V		ASD-UHB2HV-240D50-PRM												
	ASD-UHB2-100D50-PRM	90-130 V	ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Driver output current	ASD-UHB2-100D35-PRM	750 mA	ASD-UHB2-150D40W-PRM	600 mA						ASD-UHB2-240D50-PRM	1 A	ASD-UHB2HV-100D50-PRM		2.2 A					
	ASD-UHB2-150D35-PRM	600 mA	ASD-UHB2-150D50-PRM		ASD-UHB2-240D50W-PRM	ASD-UHB2HV-150D50-PRM	3.3 A												
	ASD-UHB2-200D35-PRM	800 mA	ASD-UHB2-150D50W-PRM		ASD-UHB2-300D50-PRM	5.6 A	ASD-UHB2HV-200D50-PRM	4.4 A											
	ASD-UHB2-100D40W-PRM	750 mA	ASD-UHB2-200D40W-PRM	800 mA	5.6 A		ASD-UHB2HV-240D50-PRM	4.4 A											
	ASD-UHB2-100D50-PRM		ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
LED driver class	ASD-UHB2-100D35-PRM	Non-isolated	ASD-UHB2-150D40W-PRM	Non-isolated						ASD-UHB2-240D50-PRM	Non-isolated	ASD-UHB2HV-100D50-PRM	Isolated						
	ASD-UHB2-150D35-PRM		ASD-UHB2-150D50-PRM							ASD-UHB2-240D50W-PRM		ASD-UHB2HV-150D50-PRM							
	ASD-UHB2-200D35-PRM		ASD-UHB2-150D50W-PRM							ASD-UHB2-300D50-PRM		ASD-UHB2HV-200D50-PRM							
	ASD-UHB2-100D40W-PRM		ASD-UHB2-200D40W-PRM									ASD-UHB2HV-240D50-PRM							
	ASD-UHB2-100D50-PRM		ASD-UHB2-200D50-PRM																
	ASD-UHB2-100D50W-PRM		ASD-UHB2-200D50W-PRM																
Dimming compatible controls																			
Brand	Leviton		Lutron																
Models	ZS057-DOZ		IP710		DVTV		DVSTV												
	DS710		DD710		NTSTV		MS-Z101												
Regular and Voluntary Certifications																			
5-year limited warranty																			
cULus listed E473804																			
DesignLights Consortium (DLC) listed (Classification: Premium series)																			
Main: Indoor Luminaires; General Application: High-Bay;																			
Primary Use: High-Bay Luminaires for Commercial and Industrial Buildings																			

PACKAGE CONTENTS:

Description	Q-ty
LED UFO High Bay Fixture	1
Mounting ring (A)	1
Safety cable (B)	1
Box	1
Cut sheet	2


A

B

* Under extreme conditions fixture may enter protection mode. If ambient temperature exceeds 65°C (149°F) for an extended period lumen output will decrease to 60% capacity. At higher sustained temperatures protection mode will terminate power to the fixture.

PACKAGE CONTENTS:

Description	Q-ty
LED UFO High Bay Fixture	1
Mounting ring (A)	1
Safety cable (B)	1
Box	1
Cut sheet	2



For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com



















LED UFO HIGH BAY

Premium Series

ACCESSORIES (sold separately):

 Microwave motion sensor kit for regular voltage UHB-MSK1 for high voltage UHBHV-MSK2	 Remote Control for UHB-MSK1 UHB-RC-MSK1  Remote Control for UHBHV-MSK2 ASD-CELP02H-MS	 Spring Hook ASD-H-M10	 Screw-bolt hook ASD-HS-M10	 LED Emergency back-up power supply 40W dimming 0-10V WP-EWG-040U  EMK-RC Remote test switch for LED Emergency back-up power supply
 16" 90" Polycarbonate Reflector ASD-DUHB-16-90PC  19" 90" Polycarbonate Reflector ASD-DUHB-19-90PC	 Aluminum Reflector ASD-DUHB-16-90AL	 Spring Hook ASD-H-M12	 6-foot Cord 120V-277V Straight Blade Plug ASD-CRD6-SBP-277V	
 Polycarbonate Bottom Conical Lens for 16" ASD-BLUHB-16PC  Polycarbonate Bottom Conical Lens for 19" ASD-BLUHB-19PC	 Aluminum Reflector ASD-DUHB-21-120ALG	 Pendant Mount Bracket ASD-PMB-UHB	 Surface Mount Bracket ASD-SMB100/300-UHB2	
Inline Wire Connector LLT-M19CS03 for all fixture models - M19 screw fixing wire 3 pin male and female waterproof connector - IP67 protection level - Contact Brass with Gold Plated - Current rating: 20A per contact - Voltage rating: 250V - Accepted Max. Cable OD: 10mm - Field installable, Screw fixing with cable Note: For power wiring ONLY. Do not use for dimmer wires				

ACCESSORIES COMPATIBLE LIST:

Accessories	Models	Microwave motion sensor kit UHB-MSK1	Microwave motion sensor kit UHBHV-MSK2	Polycarbonate Reflector 16" ASD-DUHB-16-90PC	Polycarbonate Reflector 19" ASD-DUHB-19-90PC	Polycarbonate Bottom Conical Lens for 16" ASD-BLUHB-16PC	Polycarbonate Bottom Conical Lens for 19" ASD-BLUHB-19PC	Aluminum Reflector 16" ASD-DUHB-16-90AL	Aluminum Reflector 21" ASD-DUHB-21-120ALG	Inline Wire Connector LLT-M19CS03	Spring Hook M10 ASD-H-M10	Screw-bolt hook M10 ASD-HS-M10	Spring Hook M12 ASD-H-M12	Emergency back-up power supply WP-EWG-040U	6-foot Cord 120V-277V Straight Blade Plug ASD-CRD6-SBP-277V	6-foot Cord 120V-277V 3-Blade Twist-Lock Plug ASD-CRD6-TLP-277V	Pendant Mount Bracket ASD-PMB-UHB	Surface mount Bracket ASD-SMB100/300-UHB2
	ASD-UHB2-100D35-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-150D35-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-200D35-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-100D40W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-100D50-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-100D50W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-150D40W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-150D50-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-150D50W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-200D40W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-200D50-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-200D50W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-240D50-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-240D50W-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2-300D50-PRM	•		•	•	•	•	•	•	•	•	•		•	•	•	•	•
	ASD-UHB2HV-100D50-PRM		•	•	•	•	•	•	•	•	•	•	•				•	•
	ASD-UHB2HV-150D50-PRM		•	•	•	•	•	•	•	•	•	•	•				•	•
	ASD-UHB2HV-200D50-PRM		•	•	•	•	•	•	•	•	•	•	•				•	•
	ASD-UHB2HV-240D50-PRM		•	•	•	•	•	•	•	•	•	•	•				•	•

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

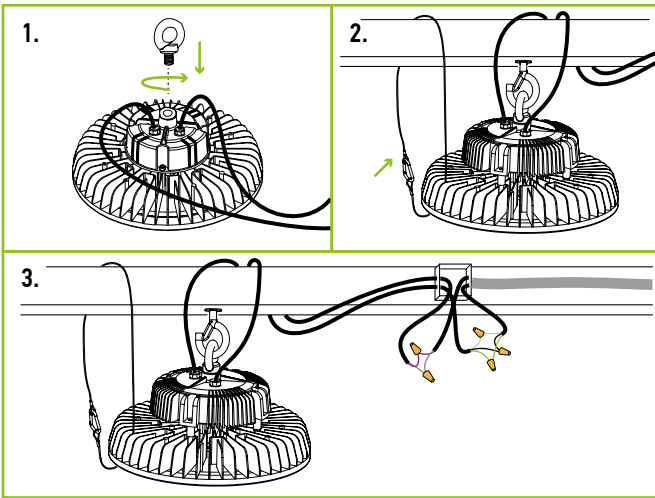
Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

INSTALLATION STEPS:


1. Screw the Hanging Ring (included) and tighten it.
2. Clip the fixture on the hook in the ceiling using Hanging ring. Secure the luminaire with a safety cable.
3. Connect the wires: Black to Black, White to White, Green to Green. Secure the connection with Wire Nuts.



DIFFUSER AND LENS INSTALLATION


sold separately:

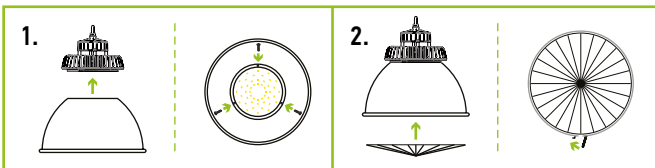1. Install the diffuser, tighten the screws
2. Attach the conical lens to the included clamp



This fixture features Integrated dimming and can be 1-10V, PWM signal or resistance dimming to save energy and achieve specific light levels. The LED UFO High Bay is designed to install as a surface mounted luminaire.

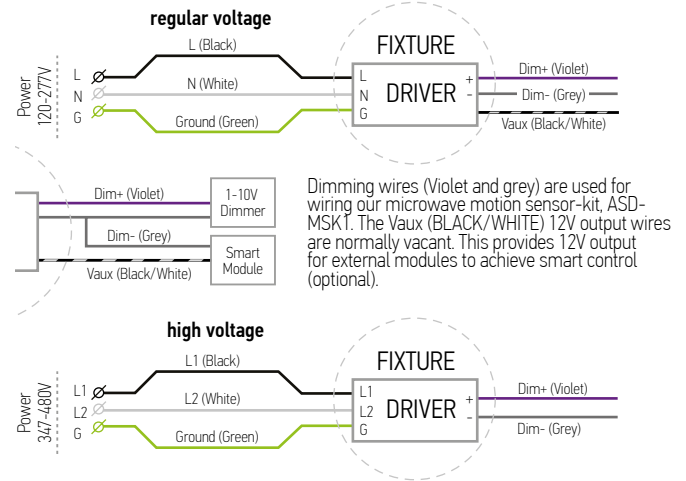
ELECTRICAL SCHEMATIC DIAGRAM:



SURFACE MOUNT BRACKET INSTALLATION

ASD-SMB100/300-UHB2 sold separately:

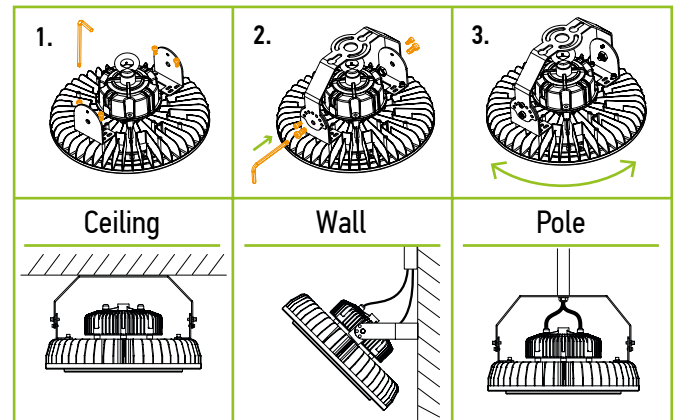
1. Use four PM5x16 mm screws (included) to install bracket swivel on the top of the lamp body.
2. Use two PM5x12 mm screws (include) to fix bracket on the swivels.
3. Adjust the lighting direction and fix it using two M8x20 mm screws (include).



PENDANT MOUNT BRACKET INSTALLATION

ASD-PMB-UHB sold separately:

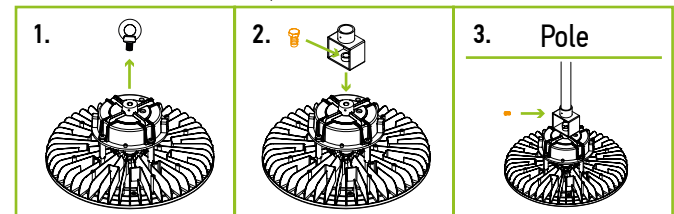1. Remove the original ring from the driver.
2. Install the adapter, fix it on the driver using a M10 or M12 screw (included with the adapter).
3. Screw the adapter with the fixture onto a pole, fix the adapter with an M3 screw (included with the adapter).



For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series


MICROWAVE MOTION SENSOR KIT INFORMATION

- ▶ Sensor parameters can be conveniently set via remote control
- ▶ Mounting height up to 15m max., suitable for warehouse use
- ▶ Water proof sensor with IP65 rating
- ▶ Automatic dimming when used in combination with 1-10V dimmable control gears
- ▶ Built-in adjustable daylight sensor
- ▶ 1-10V interface can match up with Merrytek stand-alone daylight sensor MS01 to achieve daylight harvesting
- ▶ Optional mounting brackets for different applications

Specifications	model UHB-MSK1 (sold separately)						model UHBHV-MSK2 (sold separately)
For fixture models	ASD-UHB2-100035-PRM ASD-UHB2-150035-PRM ASD-UHB2-200035-PRM	ASD-UHB2-100040W-PRM ASD-UHB2-100050-PRM ASD-UHB2-100050W-PRM	ASD-UHB2-150040W-PRM ASD-UHB2-150050-PRM ASD-UHB2-150050W-PRM	ASD-UHB2-200040W-PRM ASD-UHB2-200050-PRM ASD-UHB2-200050W-PRM	ASD-UHB2-240050-PRM ASD-UHB2-240050W-PRM ASD-UHB2-300050-PRM	ASD-UHB2HV-100050-PRM ASD-UHB2HV-150050-PRM	ASD-UHB2HV-200050-PRM ASD-UHB2HV-240050-PRM
Rated load	120 Vac - 400 W max; 277 Vac - 800 W max						347 Vac - 800 W max; 480 Vac - 1200 W max
Detection area	25% / 50% / 75% / 100%						
Hold time	5 s/30 s/1 min/3 min/5 min/10 min/20 min/30 min						
Daylight sensor	5 lux/15 lux/30 lux/50 lux/100 lux/150 lux/Disable						2 lux/10 lux/30 lux/50 lux/80 lux/120 lux/Disable
Standby period	0 s/10 s/1 min/3 min/5 min/10 min/30 min/+∞						
Standby dimming level	10% / 20% / 30% / 50%						
Sensor principle	Microwave motion detector						
Microwave frequency	5.8 GHz ± 75 MHz, ISM wave band						
Transmitting power	<0.5 mW (1% of transmitting power for cell phone)						<1 mW (1% of transmitting power for cell phone)
Mounting height	3-15 m (10-50 ft)						
Detection angle	150° (Wall installation); 360° (Ceiling installation)						
Motion detection	0.5-3 m/s						
Operating temperature	-31 to 158°F (-35°C to 70°C)						
IP rating	IP65						

 RF interference may affect the operation of this sensor

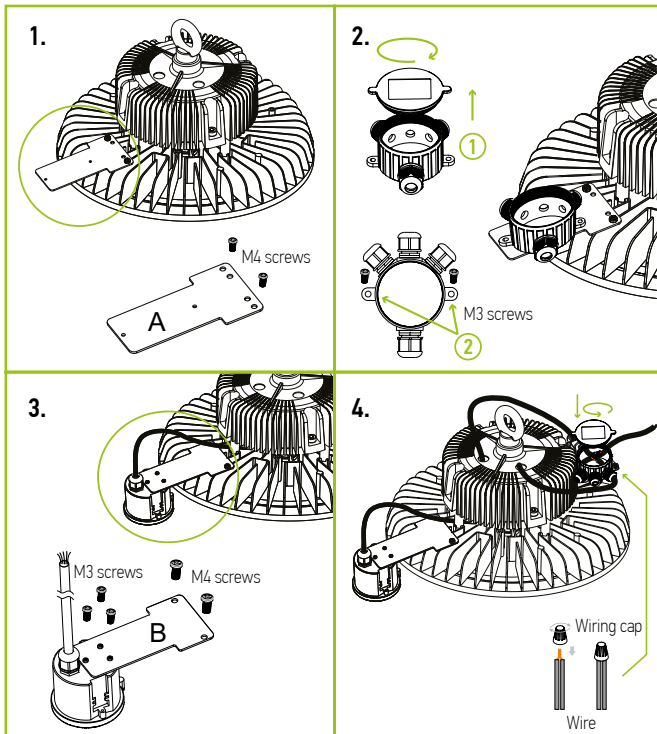
INSTALLATION STEPS FIXTURES WITHOUT REFLECTOR




FIXTURES WITH AL REFLECTOR

Note: while using PC reflector or PC reflector + conical lens, the fixture can be installed on the body of the fixture. Installation on the reflector is only needed when using Aluminum reflectors.

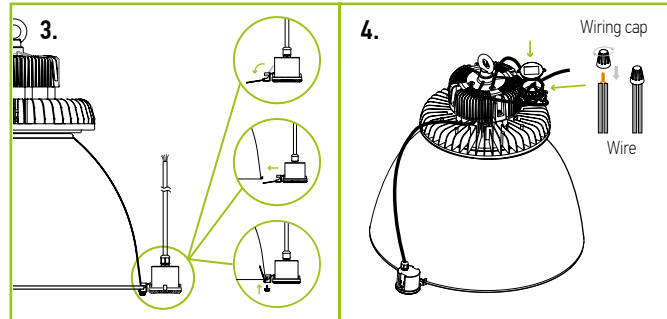For fixtures without the reflector, install the j-box mounting plate as shown in steps 1 and 2 to the left.



ELECTRICAL SCHEMATIC DIAGRAM:

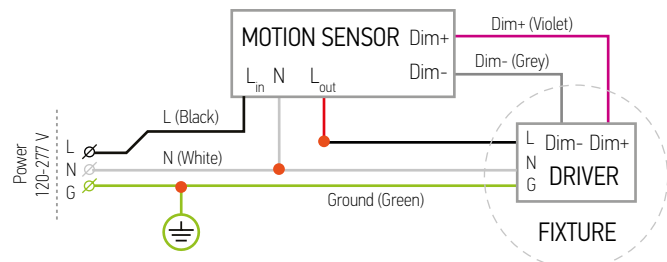

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series

MOTION SENSOR UHB-MSK1 SETTINGS Please follow the additional motion sensor manual to setup your motion sensor.

USING DIP SWITCHES

Detection area, hold time, standby period, standby DIM level and daylight sensor can be set by using DIP switches on the sensor. Note that reducing the detection area will also reduce the sensitivity.

ON	1	
I	ON	100%
II	-	50%

Detection area

ON	2	3	4	
I	ON	ON	ON	5s
II	-	ON	ON	30s
III	ON	-	ON	1min
IV	-	-	ON	3min
V	ON	ON	-	20min
VI	-	-	-	30min

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

ON	1	2	3	
I	ON	ON	ON	0 S
II	-	ON	ON	1 min
III	ON	-	ON	3 min
IV	-	-	ON	10 min
V	ON	ON	-	30 min
VI	-	-	-	+∞

ON	4	5	
I	ON	ON	10%
II	ON	-	20%
III	-	ON	30%
IV	-	-	50%

ON	6	7	8	9	
I	ON	ON	ON	ON	5 lux
II	-	ON	ON	ON	15 lux
III	ON	-	ON	ON	30 lux
IV	-	-	ON	ON	50 lux
V	ON	ON	-	ON	100 lux
VI	ON	ON	ON	-	150 lux
VII	-	-	-	-	Disable

Standby period


Refers to the time period the lamp remains at a pre-set dimming level before it completely switches off in the long absence of people. *When set to 0s, the lamp will work in an on/off function. *When daylight sensor is set to 'Disable' and standby period to '+', the lamp will work using 2-step dimming control.

Standby dimming level

This is the pre-set dimming level you would like to have after the hold time in the long absence of people.

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold. The settings are as follows: *When set to Disable Mode, the sensor will switch on the lamp when motion is detected regardless of ambient light levels.



USING REMOTE CONTROL

UHB-RC-MSK1 sold separately


Button		Remarks						
ON / OFF		Press the "ON/OFF" button: the light goes to constant on/off mode and the sensor is disabled. Press "Reset" or "Auto mode" to quit this mode and the sensor starts to work.						
Reset		Press "Reset" button: all parameters are the same as the DIP switch or factory settings.						
Sensor motion		Press "Sensor motion" button, the light quits from the constant on/off mode, and the sensor starts to work (The latest setting stays in validity).						
Dim Test		Press "DIM Test" button: the 1-10 V dimming works to test whether the 1-10Vdc dimming ports are connected properly. After 2s, it returns to the latest setting automatically.						
Override DH		Long press 3s: daylight priority mode will be switched to daylight threshold mode with the preset daylight value.						
DIM+ DIM-		Set occupancy light level in range of 50%-100%. Dim level changes by 2% each time Dim+/Dim- is pressed.						
DH Mode		Long press 3s: sensor will be switched to daylight priority mode, if the preset daylight value is set to «Disable» the sensor will stay in daylight threshold mode.						
Scene Options		Detection Area	Hold-Time	Standby period	Standby dim level	Daylight Sensor	Induction model	Note: Detection area / Hold-time / Standby period / Standby dim level/Daylight sensor can be adjusted by pressing the corresponding button. The latest setting will stay valid
QS1		100%	5 min	10 min	10%	30 Lux	HS	
QS2		100%	10 min	30 min	10%	Disable	HS	
QS3		100%	20 min	30 min	10%	Disable	HS	
TEST 2S		Press the "TEST 2S" button at any time to enter test mode. In this mode the sensor parameters are as follows: Detection Area is 100%, Hold-Time is 5s, Standby Dim Level is 10%, Standby Period is 0s, daylight sensor is disabled. This function is only for testing. Press «Reset» or any other function button to exit this mode.						
HS	LS	Press the "HS" button for high sensitivity in the detection area. Press the "LS" button for low sensitivity in the detection area. The adjustment is based on the "Detection Area" parameter you set.						
	Daylight Sensor	Set up daylight threshold: 5Lux/15Lux/30Lux/50Lux/100Lux/150Lux/ Disable					Standby dim level	Set up standby dim level: 10%/20%/30%/50%
	Standby period	Set up standby time: 0S/10S/1min/3min/5min/10min/30min/+∞					Detection Area	Set up detection area: 25%/50%/75%/100%
	Hold-time	Set up hold-time: 5S/30S/1min/3min/5min/10min/20min/30min					Remote Distance	Toggle the button to set the remote distance of remote control and sensor.

Remote control and code setting conversion

- DIP switch settings convert to remote control: Press any button except "RESET" on the remote control, and the sensor settings convert to the function currently selected by the remote control. (No function button settings invalid)
- Remote control convert to DIP switch settings:
 - Press the "RESET" button on the remote control, and all settings return to the DIP switch settings of the sensor.
 - Turn off the power, toggle any DIP switch, connect to the power, and all settings return to the DIP switch settings when power is supplied again.

MOTION SENSOR UHB-MSK2 SETTINGS Please follow the additional motion sensor manual to setup your motion sensor.

USING REMOTE CONTROL ASD-CELP02H-MS sold separately



Remote control waive is 10 ft, every fixture needs to be set up separately

Button	Remarks					
ON / OFF	Press the "ON/OFF" button: the light stays permanently on or off. *Press "Auto Mode", "RESET" or "Scene mode" buttons to quit this mode.					
Auto Mode	Press "Auto Mode" button: the sensor starts to work and all settings remain the same as before the light was switched on/off.					
Reset	Press "RESET" button: products with DIP switch will be controlled by DIP switches					
Scene mode	Detection area	Hold-time	Daylight threshold	Standby period	Standby dimming level	
SC1	100%	30s	0.2Fc	1min	10%	
SC2	100%	5min	1Fc	10min	10%	
SC3	100%	10min	5Fc	30min	10%	
SC4	100%	30min	Disable	+∞	10%	
Test (2S)	The button "Test (2s)" is for testing purposes only. After pressing this button, the sensor goes to test mode (hold time is only 2s) automatically. standby period and daylight sensor are disabled. This mode can be ended by pressing "Reset", "Auto mode", "Scene mode" or "Hold-time". The sensor settings are changed accordingly. Brightness settings: Disable Test mode (can press any key to exit this mode).					
	On/off control	There are 4 fixed scene mode programs built into the remote control to choose for different applications.			Daylight threshold	Press the button "daylight sensor" to set daylight threshold as 0.2Fc / 1Fc / 3Fc / 5Fc / 8Fc / 11Fc / disable.
	Detection area	Press the button "detection range" to set detection range as 100% / 75% / 50% / 10%.			Standby period	Press the button "standby period" to set standby period as 0s / 10s / 30s / 1min / 5min / 10min / 30min / +∞. Note: "0s" means on/off control; "+∞" means bi-level dimming control.
	Hold-time	Press the button "hold-time" to set hold-time as 5s / 30s / 1min / 3min / 5min / 10min / 20min / 30min.			Standby dimming	Press the button "standby dimming level" to set the standby dimming level as 10% / 20% / 30% / 50%.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series

EMERGENCY BACK-UP POWER SUPPLY INFORMATION

WP-EWG-040U sold separately


EWG 40W, listed for field and factory installation, provides constant power output to the load during emergency mode operation. They maintain illumination in emergency mode for a minimum of 90 minutes. It is an ideal emergency solution for UFO LED highbay lights.

- ▶ Universal input range
- ▶ Integrated junction box design
- ▶ Field and factory installation
- ▶ IP65 for dry, damp and wet location
- ▶ 40W & 90mins durable emergency operating time
- ▶ Surge L-N: 3KV; L&N-PE: 3KV
- ▶ Protection: Over-Voltage, Short-Circuit, Over-Load, Open-Circuit
- ▶ LiFePO4 safety batteries
- ▶ Link to the input of LED drivers
- ▶ Remote test via handheld controller
- ▶ Self-diagnostic every month and year
- ▶ 5-year warranty from manufacture date
- ▶ Remote controller (sold separately)


Specifications	
Input Voltage	120-277 V
Input Current	0.2A Max.
Input Power	12W Max.
Standby Input Power	< 0.8 W (Finished charging)
Maximum standby time between Recharges	12 Months
Driver Type	Constant power
Output Power (Emergency Mode)	40 W
Output Voltage Range	120-200 Vdc
Maximum Load Power	300 W (When dimming to a minimum, the power needs to be less than 36W)
Peak Output Power (Emergency Mode)	100 W (last time 10 seconds)
Number of Output Channels	1 Channel
RFI/EMI	FCC Part 15 Class B
Output Type	LED Class 1
Battery Type	LiFePO4 16Vdc
Battery Capacity Available	6000 mAh (96 WH)
Battery Recharge Time	24 Hours
Battery Discharge Time	90 Min.
Maximum lighting fixture weight	44.1 lbs (20 Kg)
Self-Diagnostic Test System	In the normal charging mode, the system performs a self-diagnostic test every 30 days, the system switches to emergency mode for 30S, and then automatically switches back to the normal charging mode.
	In the normal charging mode, the system switches to emergency mode every 360 days (after 11 Monthly self-diagnostic test) and works until the end of discharge. Automatically switches back to normal charging mode after discharge.
Ambient Operating Temperature Range	50°F to 122°F (10°C to 50°C)
Service Life	50,000 hours
Maximum mounting height	36 FT (11 m)
Input Surge Protection	2.5 KV Ring Wave, L-N & L/N-PE 3 KV
Protections	Battery Over Discharge Protection
	Output Short Circuit Protection
Approvals/Class	RoHS, UL924 Listed, CEC Title 20
	Dry, Damp and Wet Locations



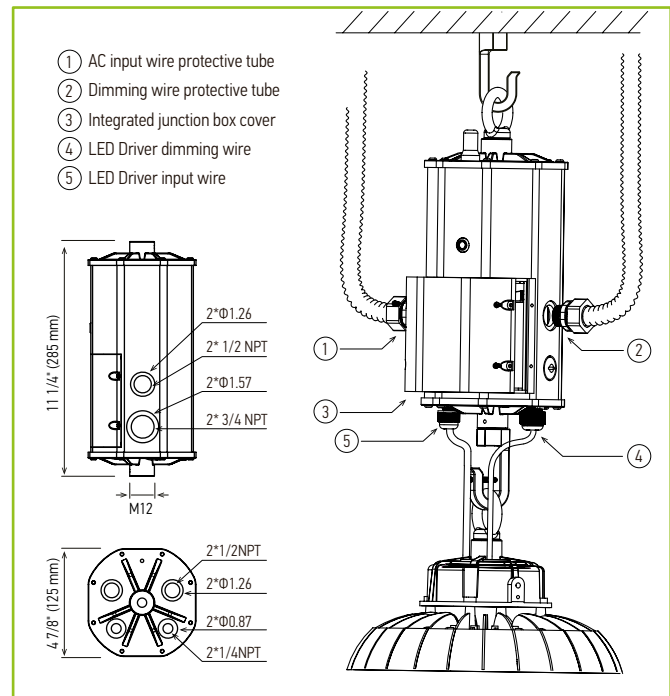For more information please see the Cut sheet from the package.



ELECTRICAL SCHEMATIC DIAGRAM:

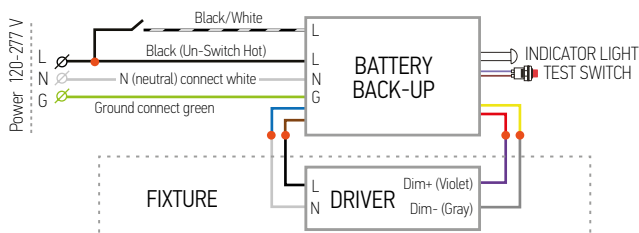

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED UFO HIGH BAY

Premium Series

ORDERING INFORMATION

LED UFO HIGH BAY FIXTURE:

Model	Watts	CCT	Pcs. per Carton	Carton Size	Carton Weight	UPC
ASD-UHB2-100D35-PRM	100 W	3,500 K	1	10.6" x 10.6" x 7.1"	9.3 lb	810050734523
ASD-UHB2-150D35-PRM	150 W	3,500 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050734530
ASD-UHB2-200D35-PRM	200 W	3,500 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050734547
ASD-UHB2-100D40W-PRM	100 W	4,000 K	1	10.6" x 10.6" x 7.1"	9.3 lb	810050733281
ASD-UHB2-100D50-PRM	100 W	5,000 K	1	10.6" x 10.6" x 7.1"	9.3 lb	819201023486
ASD-UHB2-100D50W-PRM	100 W	5,000 K	1	10.6" x 10.6" x 7.1"	9.3 lb	810050733298
ASD-UHB2-150D40W-PRM	150 W	4,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050733304
ASD-UHB2-150D50-PRM	150 W	5,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	819201023493
ASD-UHB2-150D50W-PRM	150 W	5,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050733311
ASD-UHB2-200D40W-PRM	200 W	4,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050733328
ASD-UHB2-200D50-PRM	200 W	5,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	819201023509
ASD-UHB2-200D50W-PRM	200 W	5,000 K	1	10.6" x 10.6" x 7.7"	9.4 lb	810050733335
ASD-UHB2-240D50-PRM	240 W	5,000 K	1	13" x 13" x 7.3"	10.9 lb	819201024018
ASD-UHB2-240D50W-PRM	240 W	5,000 K	1	13" x 13" x 7.3"	10.9 lb	810050734516
ASD-UHB2-300D50-PRM	300 W	5,000 K	1	13" x 13" x 8.7"	12.9 lb	819201025855
ASD-UHB2HV-100D50-PRM	100 W	5,000 K	1	10.6" x 10.6" x 7.1"	9.8 lb	819201023516
ASD-UHB2HV-150D50-PRM	150 W	5,000 K	1	10.6" x 10.6" x 7.7"	9.8 lb	819201023523
ASD-UHB2HV-200D50-PRM	200 W	5,000 K	1	10.6" x 10.6" x 7.7"	11.4 lb	819201023530
ASD-UHB2HV-240D50-PRM	240 W	5,000 K	1	13" x 13" x 7.3"	12.5 lb	819201026029

ACCESSORIES:

Model	Name	Weight	Dimensions		
ASD-H-M10	Spring Hook for LED UFO High Bays UHB 100-200W M10	0.3 lb	3 15/16" x 2 1/2" x 3/8"		
ASD-H-M12	Spring Hook for LED UFO High Bays UHB 240-300W M12	0.3 lb	4 1/8" x 2 1/2" x 1/2"		
ASD-HS-M10	Screw-bolt hook for LED UFO High Bay UHB 100-200W M10	0.2 lb	1 1/4" x 1 1/16" x 3 1/8"		
ASD-SMB100/300-UHB2	Surface mount Bracket for 100/300W LED UFO High Bays UHB2	1 lb	9 11/16" x 3 1/8" x 5 5/16"		
ASD-PMB-UHB	Pendant Mount Bracket LED UFO High Bays	0.6 lb	2 3/8" x 1 1/2" x 2 7/8"		
ASD-DUHB-16-90AL	Aluminum Reflector 16" 90° for LED UFO High Bays UHB	1.4 lb	15 3/4" x 5 1/8"		
ASD-DUHB-21-120ALG	Aluminum Reflector 21" 120° for LED UFO High Bays UHB	1.1 lb	21" x 4 1/8"		
ASD-DUHB-16-90PC	Polycarbonate Reflector 16" 90° for LED UFO High Bays UHB	1.4 lb	16 1/4" x 3 7/8"		
ASD-DUHB-19-90PC	Polycarbonate Reflector 19" 90° for LED UFO High Bays UHB	1.3 lb	18 7/8" x 5 1/2"		
ASD-BLUHB-16PC	Polycarbonate Bottom Conical Lens for 16" Reflector DUHB	1.1 lb	16" x 1 1/4"		
ASD-BLUHB-19PC	Polycarbonate Bottom Conical Lens for 19" Reflector DUHB	1.4 lb	18 3/4" x 1 5/8"		
UHB-MSK1	Microwave motion sensor kit for LED UFO High Bays UHB	1 lb	3 1/8" x 2 1/2"		
UHB-RC-MSK1	Remote Control	0.1 lb	4 1/2" x 2 1/8" x 1/2"		
UHBHV-MSK2	Microwave motion sensor kit High Voltage for LED UFO High Bays UHB	1.1 lb	3 1/8" x 2 1/2"		
ASD-CELP02H-MS	Remote Control	0.1 lb	2" x 1" x 1/2"		
WP-EWG-040U	LED Emergency back-up power supply 40W dimming 0-10V for UFO 100-300W	8.2 lb	4 7/8" x 4 7/8" x 11 1/4"		
EMK-RC	Remote test switch for LED Emergency back-up power supply	0.2 lb	5 3/4" x 1/8" x 1/8"		
LLT-M19CS03	Inline Wire Connector	0.1 lb	7 5/8" x 2 1/8"		
ASD-CRD6-TLP-277V	6-foot Cord 120V-277V 3-Blade Twist-Lock Plug	0.6 lb	70 7/8" x 3/8"		
ASD-CRD6-SBP-277V	6-foot Cord 120V-277V Straight Blade Plug	0.7 lb	70 7/8" x 3/8"		
Model	Pcs. per Carton	Carton Size	Carton Weight	UPC	GTIN 14
ASD-H-M10	50	12.2" x 12.2" x 6.9"	16.5 lb	819201025312	20819201025316
ASD-H-M12	50	12.2" x 12.2" x 6.9"	16.5 lb	810050730556	10810050730553
ASD-HS-M10	50	12.2" x 12.2" x 6.9"	10.1 lb	810050731164	10810050731161
ASD-SMB100/300-UHB2	20	20.3" x 16.9" x 11.8"	23.1 lb	819201026999	10819201026996
ASD-PMB-UHB	100	15.4" x 15.4" x 9.4"	59.1 lb	810050731522	10810050731529
ASD-DUHB-16-90AL	20	16.5" x 16.5" x 14.6"	16.8 lb	819201020621	10819201020628
ASD-DUHB-21-120ALG	10	22" x 22" x 7.5"	14.6 lb	819201020638	10819201020635
ASD-DUHB-16-90PC	10	16.9" x 16.9" x 7.9"	16.8 lb	819201020607	10819201020604
ASD-DUHB-19-90PC	10	19.7" x 19.7" x 9.1"	16.1 lb	819201020614	10819201020611
ASD-BLUHB-16PC	10	16.9" x 16.9" x 5.1"	11.7 lb	819201020645	10819201020642
ASD-BLUHB-19PC	10	19.7" x 19.7" x 5.1"	16.1 lb	819201020652	10819201020659
UHB-MSK1	40	20.7" x 12.4" x 19"	49.0 lb	819201021994	10819201021991
UHB-RC-MSK1	100	9.8" x 6.9" x 12"	11.3 lb	819201022007	10819201022004
UHBHV-MSK2	32	21.9" x 14.8" x 12.6"	40.2 lb	819201025848	20819201025842
ASD-CELP02H-MS	50	11.4" x 6.5" x 5.3"	6.6 lb	819201023479	10819201023476
WP-EWG-040U	2	14.6" x 7.5" x 13.4"	18.1 lb	810050731171	10810050731178
EMK-RC	10	12.2" x 12.2" x 6.9"	3.5 lb	810050731188	10810050731185
LLT-M19CS03	1000	17.7" x 11" x 10.2"	55.1 lb	819201020591	10819201020598
ASD-CRD6-TLP-277V	25	10.8" x 9.8" x 11.6"	15.9 lb	819201026296	10819201026293
ASD-CRD6-SBP-277V	25	10.8" x 9.8" x 11.6"	17.6 lb	819201026302	10819201026309

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

