
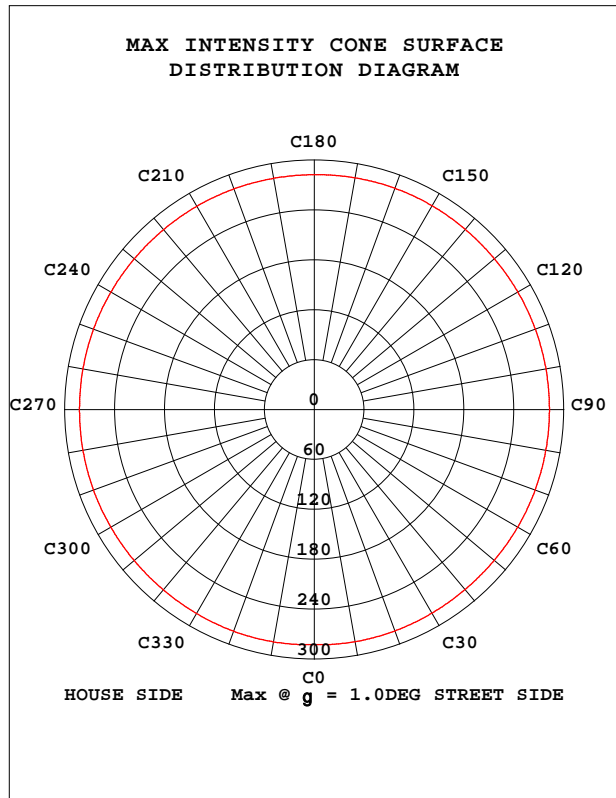


STREETLIGHT PHOTOMETRIC TEST REPORT

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

| DATA OF LAMP                     |        | PHOTOMETRIC DATA Eff: 86.87 lm/W |         |                  |         |
|----------------------------------|--------|----------------------------------|---------|------------------|---------|
| AS/NZS 1156-4D10AC-WH(10W 5000K) |        | Imax(cd)                         | 283.5   | h street_up(%)   | 0.5     |
| NOMINAL POWER(W)                 | 10     | LOR(%)                           | 100.0   | h street_down(%) | 49.9    |
| RATED VOLTAGE(V)                 | 120    | TOTAL FLUX(lm)                   | 834.9   | h house_up(%)    | 0.6     |
| NOMINAL FLUX(lm)                 | 834.94 | MAXIMUM @(C,g )                  | 338,1.0 | h house_down(%)  | 49.0    |
| LAMPS INSIDE                     | 1      | h up(%)                          | 1.1     | 76 FLASHAREA(m2) | 0.00100 |
| TEST VOLTAGE(V)                  | 120    | h down(%)                        | 98.9    | SLI              | 16.279  |

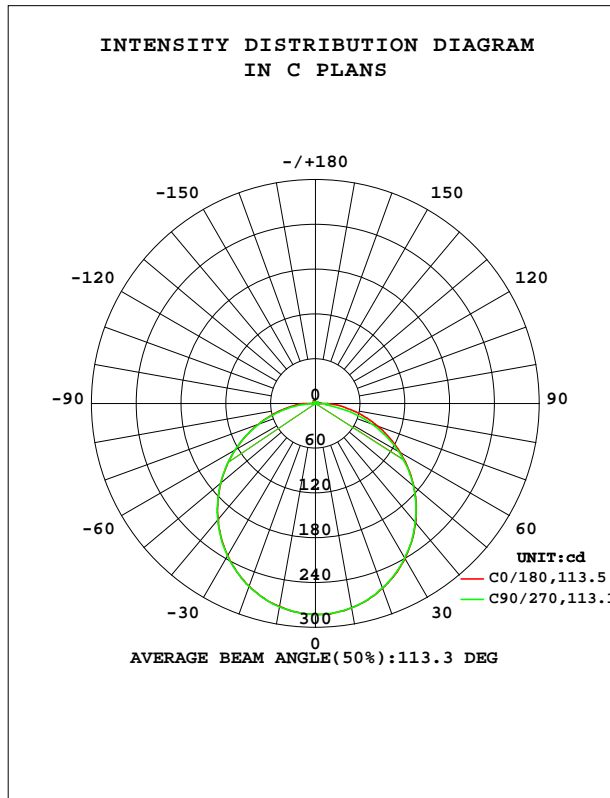


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks:

**STREETLIGHT ISOCANDELA DIAGRAM**

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

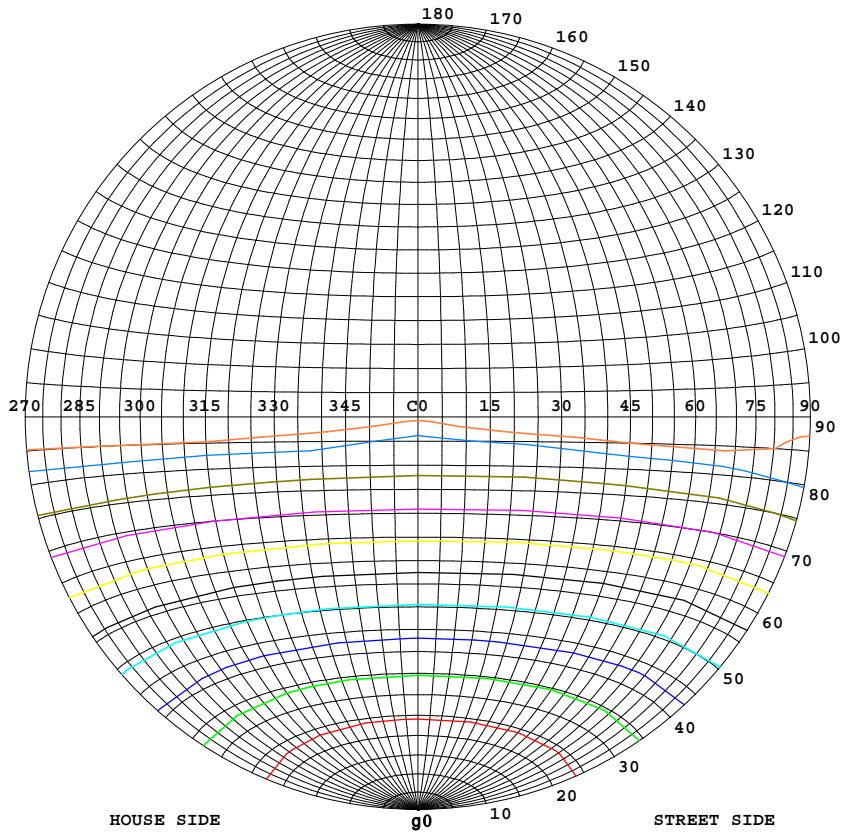

**Classification:**



IES:Type V - Very Short  
 CIE:Narrow - Short  
 IES:Cut-off  
 CIE:Semi-cut-off  
 Max.At80:57.42cd/klm  
 Max.At90:15.07cd/klm  
 Max.80-90:57.42cd/klm

| ISOCANDELA DIAGRAM |     |
|--------------------|-----|
| UNIT               | cd  |
| Imax=100%          | 284 |
| 90%                | 255 |
| 80%                | 227 |
| 70%                | 198 |
| 60%                | 170 |
| 50%                | 142 |
| 40%                | 113 |
| 30%                | 85  |
| 20%                | 57  |
| 10%                | 28  |
| 5%                 | 14  |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

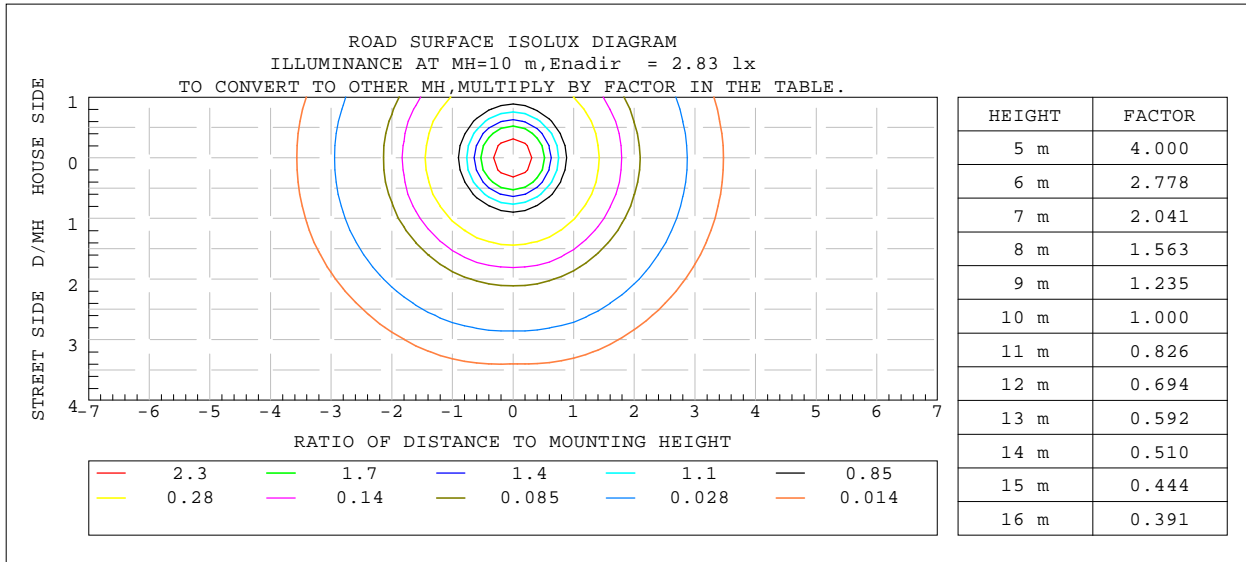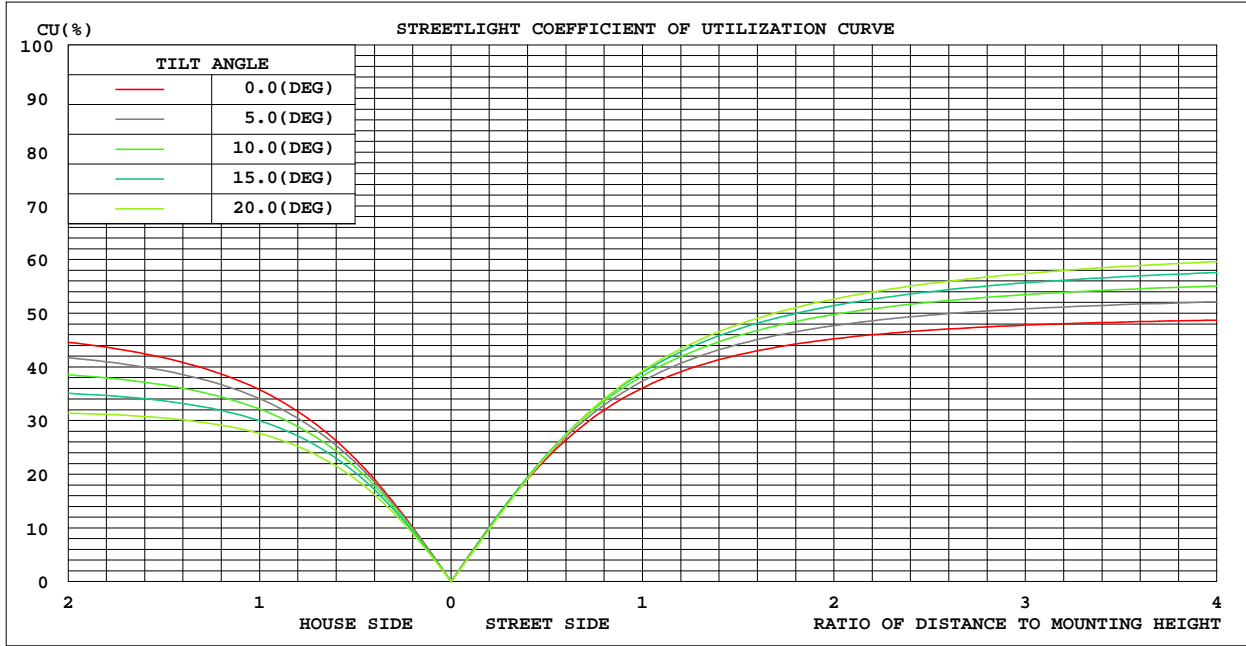

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 16 December 2024

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
Humidity: 65.0%  
Test Distance: 8.700m [K=1.0345]  
Remarks:

ZONAL FLUX DIAGRAM

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |


| g   | C0                    | C45    | C90    | C135   | C180   | C225   | C270   | C315   | g       | F zone  | F total | %lum,lamp |
|-----|-----------------------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|-----------|
| 10  | 277.9                 | 278.2  | 277.8  | 277.4  | 276.2  | 276.5  | 276.6  | 277.8  | 0- 10   | 26.74   | 26.74   | 3.2,3.2   |
| 20  | 263.6                 | 263.6  | 263.0  | 261.7  | 260.4  | 260.1  | 260.9  | 262.6  | 10- 20  | 76.46   | 103.2   | 12.4,12.4 |
| 30  | 240.1                 | 239.6  | 239.2  | 237.2  | 235.1  | 234.9  | 235.9  | 238.4  | 20- 30  | 115.6   | 218.8   | 26.2,26.2 |
| 40  | 208.9                 | 209.1  | 208.0  | 205.4  | 202.6  | 202.5  | 203.7  | 206.5  | 30- 40  | 139.3   | 358.1   | 42.9,42.9 |
| 50  | 171.8                 | 172.3  | 171.6  | 168.0  | 165.3  | 164.6  | 165.9  | 169.4  | 40- 50  | 145.0   | 503.1   | 60.3,60.3 |
| 60  | 131.1                 | 131.6  | 128.4  | 127.1  | 124.1  | 123.1  | 124.4  | 128.2  | 50- 60  | 132.6   | 635.7   | 76.1,76.1 |
| 70  | 88.66                 | 87.32  | 80.60  | 83.50  | 81.63  | 80.43  | 80.66  | 85.10  | 60- 70  | 104.6   | 740.3   | 88.7,88.7 |
| 80  | 47.95                 | 41.25  | 25.98  | 38.22  | 42.48  | 39.21  | 36.76  | 40.96  | 70- 80  | 65.13   | 805.4   | 96.5,96.5 |
| 90  | 7.970                 | 0.4878 | 2.417  | 0.3368 | 12.58  | 0.4911 | 1.289  | 0.4970 | 80- 90  | 20.14   | 825.6   | 98.9,98.9 |
| 100 | 3.600                 | 0.5338 | 1.267  | 0.2730 | 2.370  | 0.5989 | 0.4114 | 0.6844 | 90-100  | 1.891   | 827.5   | 99.1,99.1 |
| 110 | 0.7740                | 0.3361 | 1.669  | 0.3422 | 3.255  | 0.4558 | 1.039  | 0.4392 | 100-110 | 1.053   | 828.5   | 99.2,99.2 |
| 120 | 0.5012                | 0.9904 | 1.920  | 0.6499 | 0.7590 | 0.8550 | 0.9635 | 1.119  | 110-120 | 0.7689  | 829.3   | 99.3,99.3 |
| 130 | 1.794                 | 1.708  | 2.426  | 1.368  | 1.316  | 1.311  | 2.526  | 1.620  | 120-130 | 1.310   | 830.6   | 99.5,99.5 |
| 140 | 2.889                 | 1.521  | 2.763  | 2.806  | 4.598  | 3.266  | 3.168  | 1.743  | 130-140 | 1.877   | 832.5   | 99.7,99.7 |
| 150 | 1.893                 | 1.364  | 1.430  | 1.065  | 3.460  | 0.8779 | 1.365  | 0.8735 | 140-150 | 1.282   | 833.7   | 99.9,99.9 |
| 160 | 1.185                 | 1.500  | 1.603  | 2.267  | 3.020  | 3.116  | 1.845  | 1.425  | 150-160 | 0.6293  | 834.4   | 99.9,99.9 |
| 170 | 0.9859                | 0.9342 | 0.9644 | 0.9694 | 0.9969 | 1.335  | 0.9684 | 1.162  | 160-170 | 0.4732  | 834.8   | 100,100   |
| 180 | 1.025                 | 1.031  | 1.020  | 1.009  | 1.025  | 1.025  | 1.014  | 1.015  | 170-180 | 0.0958  | 834.9   | 100,100   |
| DEG | LUMINOUS INTENSITY:cd |        |        |        |        |        |        |        |         | UNIT:lm |         |           |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks:

ISOCANDELA DIAGRAM


|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

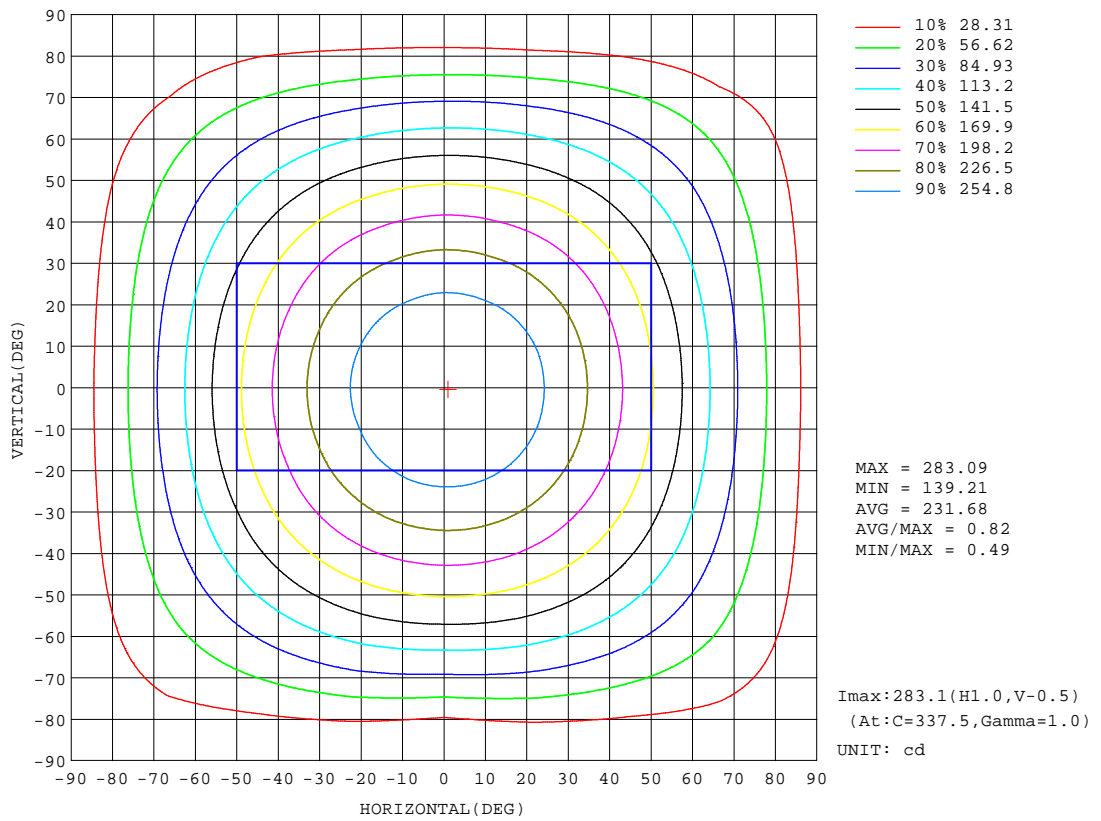

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0345]  
 Remarks:

Planar Illuminance Curve

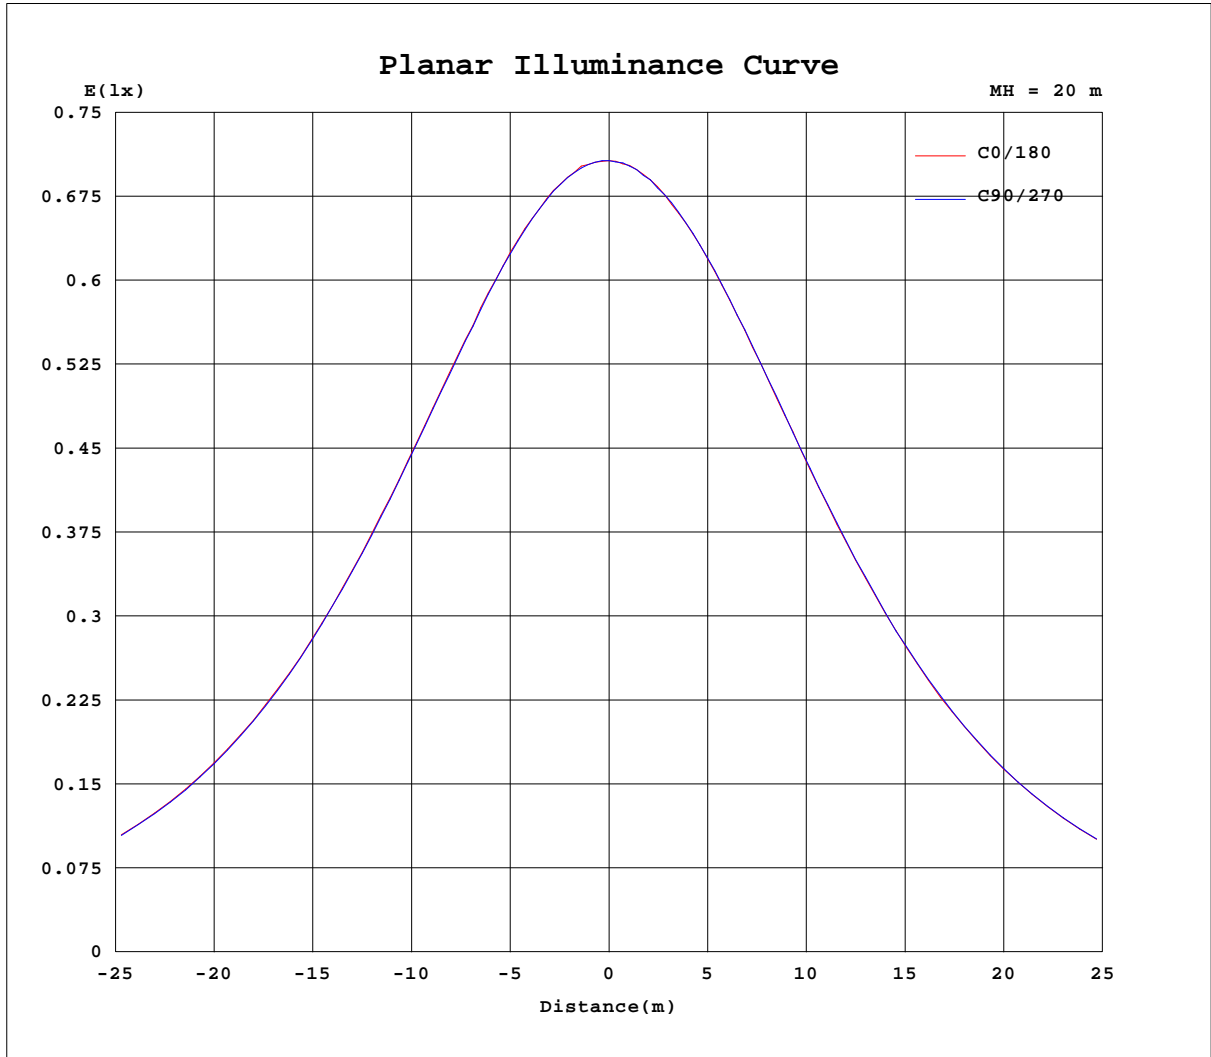


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0345]  
 Remarks:

LCS REPORT

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

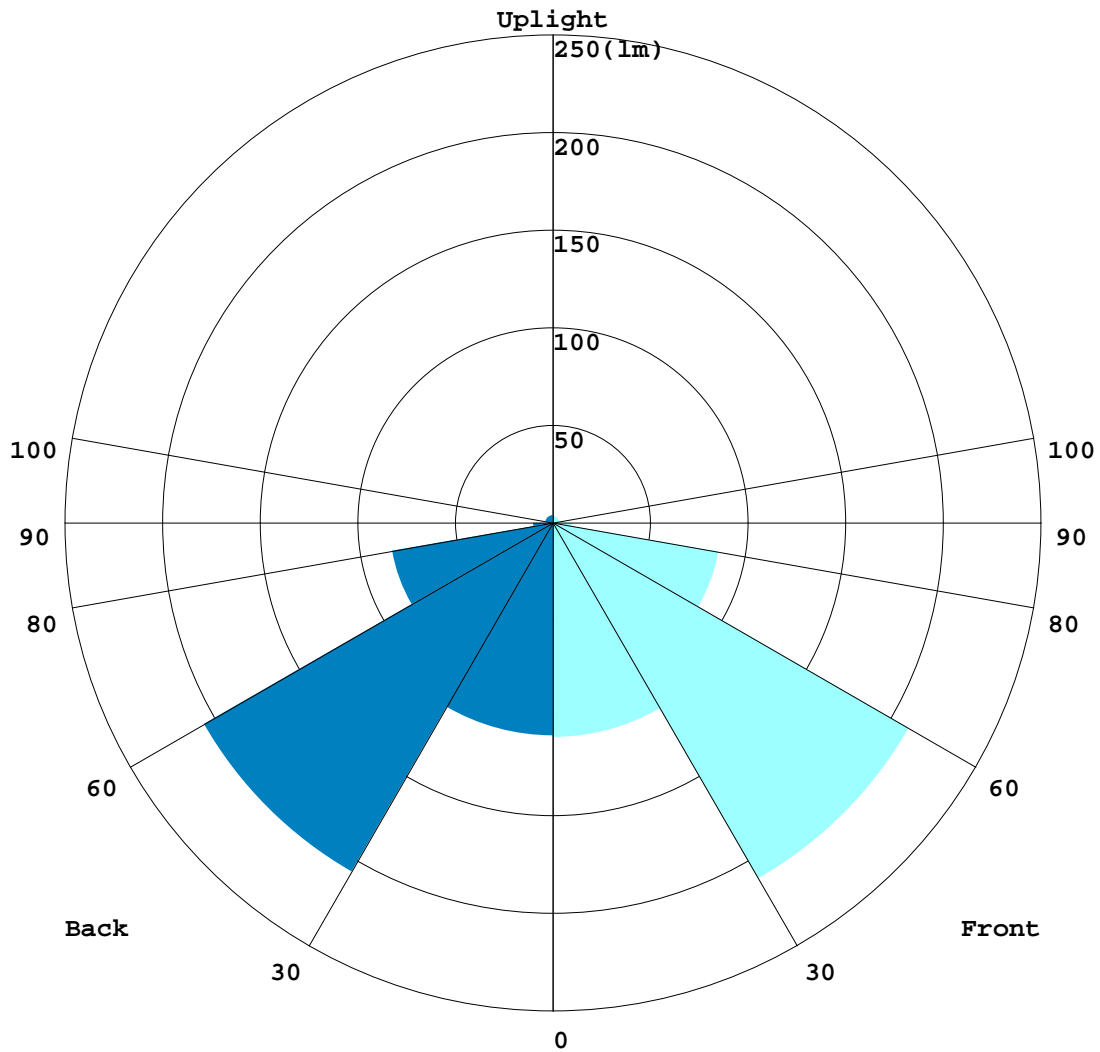

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks:

## BUG REPORT

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

## IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 109.77 | 13.1        |
| FM - Front-Medium(30-60)     | 210.58 | 25.2        |
| FH - Front-High(60-80)       | 86.177 | 10.3        |
| FVH - Front-Very High(80-90) | 10.048 | 1.2         |
| Total Forward Light          | 421.13 | 50.4        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 109.05 | 13.1 |
| BM - Back-Medium(30-60)     | 206.32 | 24.7 |
| BH - Back-High(60-80)       | 83.53  | 10.0 |
| BVH - Back-Very High(80-90) | 10.089 | 1.2  |
| Total Back Light            | 413.81 | 49.6 |

|                            |        |     |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100)   | 1.8912 | 0.2 |
| UH - Uplight-High(100-180) | 7.4893 | 0.9 |
| Total Up Light             | 9.3804 | 1.1 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B0-U1-G1 |
|---------------------------|----------|

| Zone        | Downward<br>Lumens | Upward<br>Lumens | Total<br>Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side  | 408.99             | 4.8168           | 413.81          |
| Street Side | 416.57             | 4.5636           | 421.13          |


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:16 December 2024

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:8.700m [K=1.0345]  
Remarks:

ROAD ISOCANDELA REPORT

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

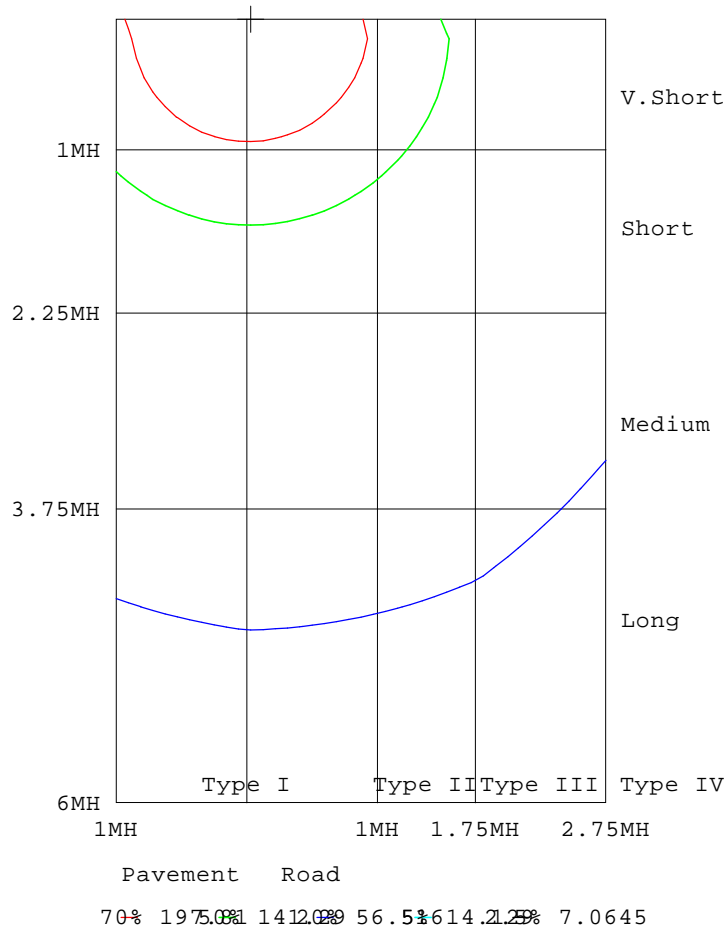

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|   |            |                  |
|---|------------|------------------|
| Test:U:120.06V I:0.0804A P:9.6110W PF:0.9960 Freq:60.00Hz Lamp Flux:834.94x1 lm |            |                  |
| NAME:   | TYPE:5000k | WEIGHT:          |
| SPEC.:  | DIM.:      | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP   | SUR.:      | Shielding Angle: |

Table--1

UNIT: cd

| C(DEG)<br>g (DEG) | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|-------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                 | 283  | 283  | 283  | 283  | 283  | 283   | 283  | 283   | 283  | 283   | 283  | 283   | 283  | 283   | 283  | 283   |  |  |  |
| 5                 | 282  | 282  | 281  | 282  | 282  | 282   | 281  | 282   | 281  | 281   | 281  | 281   | 281  | 281   | 281  | 282   |  |  |  |
| 10                | 278  | 278  | 278  | 278  | 278  | 278   | 277  | 277   | 276  | 276   | 276  | 276   | 277  | 277   | 278  | 279   |  |  |  |
| 15                | 272  | 272  | 272  | 272  | 272  | 271   | 271  | 271   | 270  | 269   | 269  | 269   | 270  | 271   | 272  | 273   |  |  |  |
| 20                | 264  | 264  | 264  | 264  | 263  | 263   | 262  | 261   | 260  | 260   | 260  | 259   | 261  | 261   | 263  | 264   |  |  |  |
| 25                | 253  | 253  | 253  | 253  | 252  | 252   | 251  | 250   | 249  | 249   | 249  | 249   | 249  | 250   | 252  | 253   |  |  |  |
| 30                | 240  | 240  | 240  | 240  | 239  | 239   | 237  | 236   | 235  | 235   | 235  | 235   | 236  | 237   | 238  | 240   |  |  |  |
| 35                | 225  | 225  | 226  | 225  | 225  | 224   | 222  | 221   | 220  | 220   | 219  | 220   | 220  | 222   | 223  | 225   |  |  |  |
| 40                | 209  | 209  | 209  | 209  | 208  | 207   | 205  | 204   | 203  | 202   | 203  | 203   | 204  | 205   | 206  | 209   |  |  |  |
| 45                | 191  | 192  | 191  | 192  | 190  | 189   | 188  | 186   | 185  | 184   | 184  | 184   | 185  | 187   | 189  | 191   |  |  |  |
| 50                | 172  | 172  | 172  | 172  | 172  | 170   | 168  | 166   | 165  | 165   | 165  | 165   | 166  | 167   | 169  | 172   |  |  |  |
| 55                | 152  | 153  | 152  | 152  | 151  | 150   | 148  | 146   | 145  | 144   | 144  | 144   | 146  | 147   | 149  | 151   |  |  |  |
| 60                | 131  | 132  | 132  | 131  | 128  | 129   | 127  | 125   | 124  | 123   | 123  | 123   | 124  | 126   | 128  | 131   |  |  |  |
| 65                | 110  | 110  | 110  | 109  | 105  | 107   | 106  | 104   | 103  | 102   | 102  | 102   | 103  | 104   | 107  | 109   |  |  |  |
| 70                | 88.7 | 89.2 | 87.3 | 85.3 | 80.6 | 84.2  | 83.5 | 82.6  | 81.6 | 80.6  | 80.4 | 79.8  | 80.7 | 82.0  | 85.1 | 88.0  |  |  |  |
| 75                | 68.3 | 68.1 | 64.8 | 61.5 | 54.7 | 60.4  | 61.2 | 62.2  | 61.4 | 60.4  | 59.3 | 58.1  | 58.5 | 59.8  | 63.3 | 67.2  |  |  |  |
| 80                | 47.9 | 47.7 | 41.2 | 36.2 | 26.0 | 35.2  | 38.2 | 42.7  | 42.5 | 39.4  | 39.2 | 37.0  | 36.8 | 37.2  | 41.0 | 43.5  |  |  |  |
| 85                | 31.8 | 25.2 | 13.9 | 10.4 | 16.9 | 9.33  | 11.5 | 24.2  | 27.0 | 18.8  | 19.0 | 16.1  | 15.1 | 14.1  | 15.4 | 22.6  |  |  |  |
| 90                | 7.97 | 0.15 | 0.49 | 5.58 | 2.42 | 2.55  | 0.34 | 0.19  | 12.6 | 0.30  | 0.49 | 1.53  | 1.29 | 2.84  | 0.50 | 0.21  |  |  |  |
| 95                | 4.48 | 0.48 | 1.65 | 1.38 | 0.75 | 1.70  | 1.30 | 0.43  | 0.96 | 0.39  | 0.91 | 0.94  | 0.83 | 1.21  | 1.28 | 0.55  |  |  |  |
| 100               | 3.60 | 1.64 | 0.53 | 0.50 | 1.27 | 0.70  | 0.27 | 0.49  | 2.37 | 0.82  | 0.60 | 0.40  | 0.41 | 0.52  | 0.68 | 1.62  |  |  |  |
| 105               | 0.91 | 0.49 | 0.50 | 1.10 | 0.94 | 1.06  | 0.44 | 1.70  | 1.32 | 2.11  | 0.42 | 0.63  | 1.05 | 1.02  | 0.39 | 0.85  |  |  |  |
| 110               | 0.77 | 0.34 | 0.34 | 1.07 | 1.67 | 1.29  | 0.34 | 0.36  | 3.25 | 0.52  | 0.46 | 0.44  | 1.04 | 0.48  | 0.44 | 0.80  |  |  |  |
| 115               | 0.43 | 0.40 | 0.65 | 1.09 | 1.97 | 1.28  | 0.56 | 0.43  | 0.62 | 0.69  | 0.53 | 0.96  | 1.24 | 1.00  | 0.49 | 0.60  |  |  |  |
| 120               | 0.50 | 0.72 | 0.99 | 1.25 | 1.92 | 1.05  | 0.65 | 0.78  | 0.76 | 0.61  | 0.86 | 0.87  | 0.96 | 1.11  | 1.12 | 0.55  |  |  |  |
| 125               | 1.36 | 1.37 | 1.53 | 2.17 | 1.46 | 2.18  | 1.14 | 0.86  | 1.05 | 0.96  | 1.24 | 2.73  | 1.95 | 1.60  | 1.43 | 1.45  |  |  |  |
| 130               | 1.79 | 1.76 | 1.71 | 2.45 | 2.43 | 2.55  | 1.37 | 1.19  | 1.32 | 1.47  | 1.31 | 3.00  | 2.53 | 2.41  | 1.62 | 1.72  |  |  |  |
| 135               | 1.94 | 2.14 | 1.62 | 2.75 | 2.61 | 2.81  | 2.71 | 1.81  | 1.51 | 1.88  | 3.58 | 3.30  | 3.03 | 2.58  | 2.25 | 1.93  |  |  |  |
| 140               | 2.89 | 1.95 | 1.52 | 2.51 | 2.76 | 2.84  | 2.81 | 3.78  | 4.60 | 4.17  | 3.27 | 3.40  | 3.17 | 2.54  | 1.74 | 2.72  |  |  |  |
| 145               | 2.01 | 1.22 | 0.67 | 1.33 | 1.73 | 1.35  | 0.67 | 3.29  | 4.73 | 3.90  | 0.82 | 3.08  | 3.01 | 2.30  | 0.80 | 1.60  |  |  |  |
| 150               | 1.89 | 0.74 | 1.36 | 0.76 | 1.43 | 0.76  | 1.07 | 0.75  | 3.46 | 0.88  | 0.88 | 0.89  | 1.36 | 0.87  | 0.87 | 0.88  |  |  |  |
| 155               | 2.06 | 0.99 | 1.99 | 1.86 | 1.28 | 1.63  | 1.35 | 0.85  | 1.39 | 1.61  | 1.36 | 1.12  | 1.37 | 1.13  | 1.73 | 1.82  |  |  |  |
| 160               | 1.19 | 1.72 | 1.50 | 1.40 | 1.60 | 2.25  | 2.27 | 1.86  | 3.02 | 1.70  | 3.12 | 1.86  | 1.85 | 2.21  | 1.43 | 1.60  |  |  |  |
| 165               | 1.38 | 1.74 | 1.12 | 1.02 | 1.40 | 1.13  | 1.07 | 2.41  | 2.83 | 1.38  | 3.20 | 2.62  | 1.33 | 1.89  | 1.60 | 1.01  |  |  |  |
| 170               | 0.99 | 0.95 | 0.93 | 0.97 | 0.96 | 0.96  | 0.97 | 0.96  | 1.00 | 1.01  | 1.33 | 0.99  | 0.97 | 1.01  | 1.16 | 1.01  |  |  |  |
| 175               | 0.99 | 0.99 | 1.02 | 1.01 | 1.00 | 1.00  | 1.00 | 1.05  | 1.08 | 1.07  | 1.05 | 1.01  | 0.98 | 1.03  | 1.03 | 1.02  |  |  |  |
| 180               | 1.03 | 1.04 | 1.03 | 1.02 | 1.02 | 1.03  | 1.01 | 1.01  | 1.03 | 1.03  | 1.03 | 1.03  | 1.01 | 1.03  | 1.02 | 1.01  |  |  |  |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:16 December 2024

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0345]  
 Remarks: