



LED OUTDOOR WALL SCNCE

OLWS-21 series

► **DESIGN** - LED OUTDOOR WALL SCNCES has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The UV resistant PMMA lens with a 120° beam angle grants you even light distribution. It is designed to operate on 120-277V circuits.

► **VARIETY** - The fixture comes in 10-inch, 18-inch, 24-inch and 36-inch and available in Black, Bronze, Nickel, Brushed Nickel finishes. Fixtures with grid are available.

► **COLOR SELECTABLE** - You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.

► **APPLICATION** - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

► **ADVANTAGES** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

► OPTIONS

► **MODELS WITH MOTION SENSOR** - The built-in infrared motion sensor will turn off the fixture automatically when no motion is detected.

► **MODELS WITH PHOTOCELL** - The built-in Dusk to Dawn Photocell will automatically turn the fixture on/off depending on the time of day.




OLWS-21

OLWS-21GR
with grid

OLWS-21-MS
with motion sensor

OLWS-21-PC
with photocell

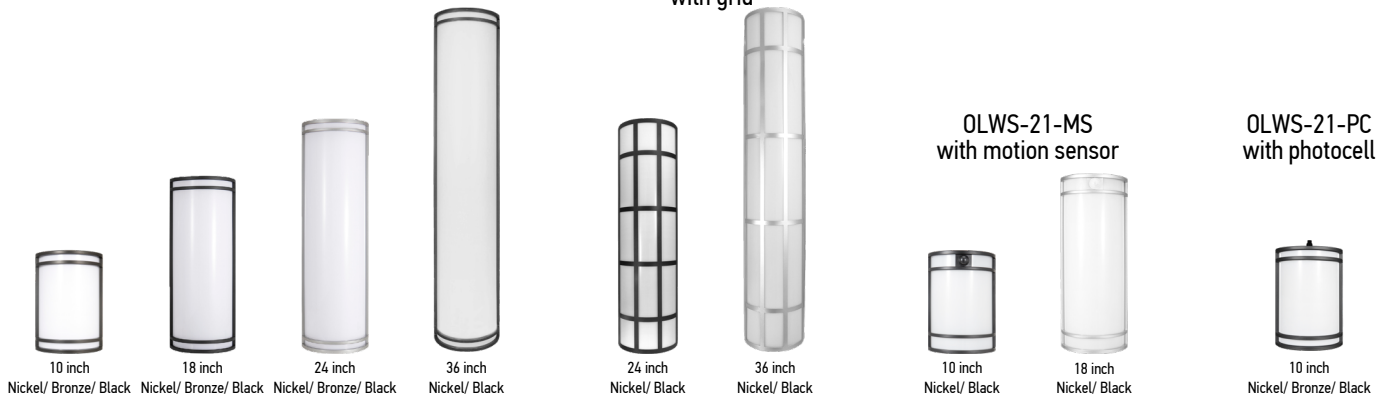

PRODUCT PRESENTATION:

Model	Size	Power	Voltage	Dimmable	Lumens	CCT	Finish	Dimensions	Pre-installed	Certification
OLWS-21										
ASD-OLWS-21-D15CC-NK	10 inch	15 W	120 V	Triac	1,098 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 9-15/16"	-	ETL(5032534)
ASD-OLWS-21-10D15CC-NK-2PACK	10 inch	15 W	120 V	Triac	1,098 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 9-15/16"	-	ETL(5032534)
ASD-OLWS-21-D15CC-BZ	10 inch	15 W	120 V	Triac	1,098 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 9-15/16"	-	ETL(5032534)
ASD-OLWS-21-10D15CC-BZ-2PACK	10 inch	15 W	120 V	Triac	1,098 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 9-15/16"	-	ETL(5032534)
ASD-OLWS-21-MV-10D15CC-NK	10 inch	15 W	120-277 V	Triac	1,361 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 10"	-	ETL(5032534)
ASD-OLWS-21-MV-10D15CC-BZ	10 inch	15 W	120-277 V	Triac	1,361 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 10"	-	ETL(5032534)
ASD-OLWS-21-MV-10D15CC-BK	10 inch	15 W	120-277 V	Triac	1,361 lm	3,000/4,000/5,000 K	Black	7" x 3-1/4" x 10"	-	ETL(5032534)
ASD-OLWS-21-MV-18D20CC-NK	18 inch	20 W	120-277 V	Triac	2,457 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 17-15/16"	-	ETL(5032534)
ASD-OLWS-21-MV-18D20CC-BZ	18 inch	20 W	120-277 V	Triac	2,457 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 17-15/16"	-	ETL(5032534)
ASD-OLWS-21-MV-18D20CC-BK	18 inch	20 W	120-277 V	Triac	2,457 lm	3,000/4,000/5,000 K	Black	7" x 3-1/4" x 17-15/16"	-	ETL(5032534)

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED OUTDOOR WALL SCONCE

OLWS-21 series

Model	Size	Power	Voltage	Dimmable	Lumens	CCT	Finish	Dimensions	Pre-installed	Certification
ASD-OLWS-21-MV-24D25CC-NK	24 inch	25 W	120-277 V	Triac	3,017 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 23-13/16"	-	ETL(5032534)
ASD-OLWS-21-MV-24D25CC-BZ	24 inch	25 W	120-277 V	Triac	3,017 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 23-13/16"	-	ETL(5032534)
ASD-OLWS-21-MV-24D25CC-BK	24 inch	25 W	120-277 V	Triac	3,017 lm	3,000/4,000/5,000 K	Black	7" x 3-1/4" x 23-13/16"	-	ETL(5032534)
ASD-OLWS-21-MV-36D30CC-NK	36 inch	30 W	120-277 V	Triac	3,268 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 36"	-	ETL(5032534)
ASD-OLWS-21-MV-36D30CC-BK	36 inch	30 W	120-277 V	Triac	3,268 lm	3,000/4,000/5,000 K	Black	7" x 3-1/4" x 36"	-	ETL(5032534)
OLWS-21GR WITH GRID										
ASD-OLWS-21GR-MV-24D25NK	24 inch	25 W	120-277 V	Triac	2,183 lm	3,000/4,000/5,000 K	Nickel	6-1/2" x 3" x 23-11/16"	-	ETL(5032534)
ASD-OLWS-21GR-MV-24D25BK	24 inch	25 W	120-277 V	Triac	2,183 lm	3,000/4,000/5,000 K	Black	6-1/2" x 3" x 23-11/16"	-	ETL(5032534)
ASD-OLWS-21GR-MV-36D30NK	36 inch	30 W	120-277 V	Triac	2,465 lm	3,000/4,000/5,000 K	Nickel	6-1/2" x 3" x 35-7/8"	-	ETL(5032534)
ASD-OLWS-21GR-MV-36D30BK	36 inch	30 W	120-277 V	Triac	2,465 lm	3,000/4,000/5,000 K	Black	6-1/2" x 3" x 35-7/8"	-	ETL(5032534)
OLWS-21-MS WITH MOTION SENSOR										
ASD-OLWS-21-10N15NK-MS	10 inch	15 W	120-277 V	-	1,172 lm	3,000/4,000/5,000 K	Nickel	7" x 3-9/16" x 9-15/16"	Motion sensor	ETL(5032534)
ASD-OLWS-21-10N15BK-MS	10 inch	15 W	120-277 V	-	1,172 lm	3,000/4,000/5,000 K	Black	7" x 3-9/16" x 9-15/16"	Motion sensor	ETL(5032534)
ASD-OLWS-21-18N20NK-MS	18 inch	20 W	120-277 V	-	2,002 lm	3,000/4,000/5,000 K	Nickel	7" x 3-9/16" x 17-15/16"	Motion sensor	ETL(5032534)
ASD-OLWS-21-18N20BK-MS	18 inch	20 W	120-277 V	-	2,002 lm	3,000/4,000/5,000 K	Black	7" x 3-9/16" x 17-15/16"	Motion sensor	ETL(5032534)
OLWS-21-PC WITH PHOTOCELL										
ASD-OLWS-21-N15CC-PC-NK	10 inch	15 W	120 V	-	1,098 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)
ASD-OLWS-21-10N15CC-PC-NK-2PACK	10 inch	15 W	120 V	-	1,098 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)
ASD-OLWS-21-N15CC-PC-BZ	10 inch	15 W	120 V	-	1,098 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)
ASD-OLWS-21-10N15CC-PC-BZ-2PACK	10 inch	15 W	120 V	-	1,098 lm	3,000/4,000/5,000 K	Bronze	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)
ASD-OLWS-21-MV-10N15NK-PC	10 inch	15 W	120-277 V	-	1,281 lm	3,000/4,000/5,000 K	Nickel	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)
ASD-OLWS-21-MV-10N15BK-PC	10 inch	15 W	120-277 V	-	1,281 lm	3,000/4,000/5,000 K	Black	7" x 3-1/4" x 10-7/16"	Photocell	ETL(5032534)

TECHNICAL PARAMETERS:

Model	Work environment	Operating temperature	Power factor	Beam Angle	Surge protection	Housing	Lens	CRI
OLWS-21								
ASD-OLWS-21-D15CC-NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	120°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-10D15CC-NK-2PACK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	120°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-D15CC-BZ	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	120°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-10D15CC-BZ-2PACK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	120°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-MV-10D15CC-NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-10D15CC-BZ	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-10D15CC-BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-18D20CC-NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-18D20CC-BZ	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-18D20CC-BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-24D25CC-NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-24D25CC-BZ	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-24D25CC-BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-36D30CC-NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-36D30CC-BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
OLWS-21GR WITH GRID								
ASD-OLWS-21GR-MV-24D25NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	127°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21GR-MV-24D25BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	127°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21GR-MV-36D30NK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	127°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21GR-MV-36D30BK	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	127°	1 kV	Steel	Acrylic	> 80
OLWS-21-MS WITH MOTION SENSOR								
ASD-OLWS-21-10N15NK-MS	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	126°	2 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-10N15BK-MS	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	126°	2 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-18N20NK-MS	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	126°	2 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-18N20BK-MS	Wet locations	-40°F to 113°F (-40°C to 45°C)	> 0.9	126°	2 kV	Aluminum	PMMA	> 80
OLWS-21-PC WITH PHOTOCELL								
ASD-OLWS-21-N15CC-PC-NK	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-10N15CC-PC-NK-2PACK	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-N15CC-PC-BZ	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-10N15CC-PC-BZ-2PACK	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Aluminum	PMMA	> 80
ASD-OLWS-21-MV-10N15NK-PC	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80
ASD-OLWS-21-MV-10N15BK-PC	Wet locations	-4°F to 113°F (-20°C to 45°C)	> 0.9	131°	1 kV	Steel	Acrylic	> 80

DIMMING COMPATIBLE CONTROLS:

Brand	Lutron					Leviton			
Models	MACL-153MLH-WH	STCL-153PH-WH	PD-6WCL-WH-R	DVCL-153PR	P-PKG1W	R02-DW6HD-2RW	R00-RNL06-0TW	R68-06674-P0T	DSL06

* The list of dimmers is relevant for models without a motion sensor.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED OUTDOOR WALL SCENCE

OLWS-21 series

PACKAGE CONTENTS FOR 10" MODELS:

Description	Quantity
LED Outdoor Wall Sconce	1 (2 for 2pack)
Mounting plate (A) for regular models	1
Mounting plate (B) for MV models	1
Fixture screw (C)	2
Decorative screw (D) for MV models	2
Mounting screw (E)	2
Wire nut (F)	3
Photocell cap (G) for PC models	1
Box	1



BUILT-IN MOTION SENSOR INFORMATION

Specifications	
Operating voltage	12 Vdc $\pm$ 1 V
Standby power	max 0.5W
Warm-up time	15 $\pm$ 5 s
Hold-time	60 $\pm$ 10 s
Daylight threshold	OFF $\rightarrow$ ON: 10-60 lux (0.9-5.5 fc); ON $\rightarrow$ OFF: max 300 lux (27.8 fc)
Mounting height	max 3.2-6.5 ft (1.8-2.2 m) wall mounted
Detection range	min 26.2 x 393.7 ft (8 x 120 m) wall mounted
Operating temperature	-22 to 122°F (-30 to 50°C)

PACKAGE CONTENTS FOR 18-36" MODELS:

Description	Quantity
LED Outdoor Wall Sconce	1
Mounting plate (A)	1
Mounting screw (B)	2
Self-tapping screw (C)	2 (4 for 24-36")
Fixture screw (D)	2
Decorative screw (E)	2
Wire nut (F)	3
Anchor (G)	2 (4 for 24-36")
Photocell cap (H) for PC models	1
Box	1



BUILT-IN PHOTOCELL INFORMATION

Specifications	
Input power	120 Vac, 60 Hz
Light level to turn ON	30 ~ 150 lux (2.8 - 14 fc)
Light level to turn OFF	200 ~ 800 lux (18.6-74.4 fc)
Operating temperature	-4°F to 122°F (-20°C to 50°C)

The dusk-to-dawn sensor automatically turns the fixture off during daylight hours.

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

For most up-to-date spec sheets please refer to asd-lighting.com




LED OUTDOOR WALL SCONCE

OLWS-21 series


INSTALLATION STEPS FOR 10" MODELS:

1. Unscrew the two fixture screws from the top and the bottom of the wall sconce. Remove the wall plate and attach it to the outlet box using two mounting screws. Choose preferred color temperature by adjusting the switch position inside the fixture. Remove the photocell cap to make the dusk-to-dawn sensor operate.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Attach the LED panel to the wall plate and secure it with two screws on the top and on the bottom (for models with Motion Sensor or Photocell before attach the cover to the LED panel, please put the wire into the hole).

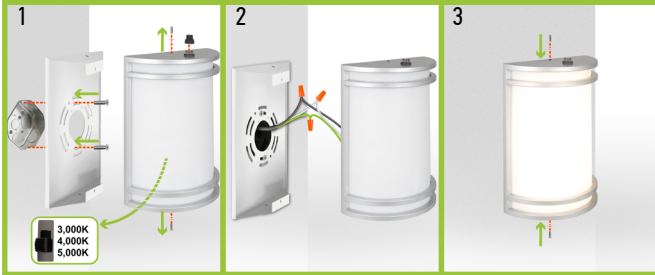

INSTALLATION STEPS FOR 18-36" MODELS:

1. Unscrew the two fixture screws from the top and the bottom of the wall sconce. Remove the cover and bottom perforated plate, then unscrew two screws from LED panel, and detach it from the wall plate. Attach wall plate to the outlet box using two mounting screws and fit it on a wall with two or four additional screws (depending on model). For models with Photocell remove the photocell cap to make the dusk-to-dawn sensor operate. Choose preferred color temperature by adjusting the switch position inside the fixture.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts.
3. Attach the LED panel to the wall plate and secure it with two screws on the top and on the bottom (for models with Motion Sensor or Photocell before attach the cover to the LED panel, please put the wire into the hole).

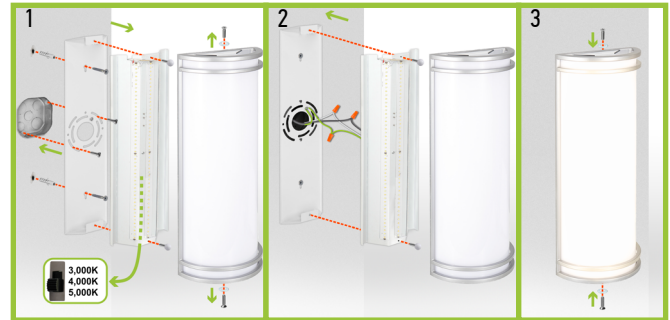

* This fixture is not rated for heavy salt water exposure or high salt content in the air. It may cause parts of the fixture to Rust. Will void the warranty of the fixture if installed in a coastal area.

ORDERING INFORMATION:

Model	Product dimensions	Weight	Pcs. (pack) per carton	Carton size	Carton weight	UPC	GTIN 14
OLWS-21							
ASD-OLWS-21-D15CC-NK	7" x 3-1/4" x 9-15/16"	1.8 lbs (0.8 kg)	4	12.4" x 18.9" x 10"	11.9 lbs	810050731379	30810050731370
ASD-OLWS-21-10D15CC-NK-2PACK	7" x 3-1/4" x 9-15/16"	4.4 lbs (2 kg)	4 (2)	18.9" x 9.7" x 12.4"	11.3 lbs	810128112383	10810128112380
ASD-OLWS-21-D15CC-BZ	7" x 3-1/4" x 9-15/16"	1.8 lbs (0.8 kg)	4	12.4" x 18.9" x 10"	11.9 lbs	810050731386	30810050731387
ASD-OLWS-21-10D15CC-BZ-2PACK	7" x 3-1/4" x 9-15/16"	4.4 lbs (2 kg)	4 (2)	18.9" x 9.7" x 12.4"	11.3 lbs	810128112390	10810128112397
ASD-OLWS-21-MV-10D15CC-NK	7" x 3-1/4" x 10"	2.2 lbs (1 kg)	2	10.2" x 9.7" x 12.4"	6 lbs	810128117333	10810128117330
ASD-OLWS-21-MV-10D15CC-BZ	7" x 3-1/4" x 10"		2	10.2" x 9.7" x 12.4"	6 lbs	810128117326	10810128117323
ASD-OLWS-21-MV-10D15CC-BK	7" x 3-1/4" x 10"	3.7 lbs (1.7 kg)	2	10.2" x 9.7" x 12.4"	6 lbs	810128116992	10810128116999
ASD-OLWS-21-MV-18D20CC-NK	7" x 3-1/4" x 17-15/16"		2	20.3" x 9.7" x 10.4"	10.4 lbs	810128112789	10810128112786
ASD-OLWS-21-MV-18D20CC-BZ	7" x 3-1/4" x 17-15/16"	4.5 lbs (2 kg)	2	20.3" x 9.7" x 10.4"	10.4 lbs	810128112772	10810128112779
ASD-OLWS-21-MV-18D20CC-BK	7" x 3-1/4" x 17-15/16"		2	20.3" x 9.7" x 10.4"	10.4 lbs	810128117340	10810128117347
ASD-OLWS-21-MV-24D25CC-NK	7" x 3-1/4" x 23-13/16"	6.2 lbs (2.8 kg)	2	26.2" x 9.7" x 10.4"	12.4 lbs	810128112802	10810128112809
ASD-OLWS-21-MV-24D25CC-BZ	7" x 3-1/4" x 23-13/16"		2	26.2" x 9.7" x 10.4"	12.4 lbs	810128112796	10810128112793
ASD-OLWS-21-MV-24D25CC-BK	7" x 3-1/4" x 23-13/16"	6.2 lbs (2.8 kg)	2	26.2" x 9.7" x 10.4"	12.4 lbs	810128117357	10810128117354
ASD-OLWS-21-MV-36D30CC-NK	7" x 3-1/4" x 36"		2	38.2" x 9.7" x 10.4"	18.6 lbs	810128115711	10810128115718
ASD-OLWS-21-MV-36D30CC-BK	7" x 3-1/4" x 36"		2	38.2" x 9.7" x 10.4"	18.6 lbs	810128115728	10810128115725
OLWS-21GR WITH GRID							
ASD-OLWS-21GR-MV-24D25NK	6-1/2" x 3" x 23-11/16"	4.7 lbs (2.1 kg)	2	26.8" x 8.7" x 11.8"	12.8 lbs	810128117746	10810128117743
ASD-OLWS-21GR-MV-24D25BK	6-1/2" x 3" x 23-11/16"		2	26.8" x 8.7" x 11.8"	12.8 lbs	810128117739	10810128117736
ASD-OLWS-21GR-MV-36D30NK	6-1/2" x 3" x 35-7/8"	6.4 lbs (2.9 kg)	2	39" x 8.7" x 11.8"	17.4 lbs	810128117760	10810128117767
ASD-OLWS-21GR-MV-36D30BK	6-1/2" x 3" x 35-7/8"		2	39" x 8.7" x 11.8"	17.4 lbs	810128117753	10810128117750
OLWS-21-MS WITH MOTION SENSOR							
ASD-OLWS-21-10N15NK-MS	7" x 3-9/16" x 9-15/16"	2.7 lbs (1.2 kg)	4	18.9" x 12.4" x 12"	14.6 lbs	810128118231	10810128118238
ASD-OLWS-21-10N15BK-MS	7" x 3-9/16" x 9-15/16"		4	18.9" x 12.4" x 12"	14.6 lbs	810128118224	10810128118221
ASD-OLWS-21-18N20NK-MS	7" x 3-9/16" x 17-15/16"	4 lbs (1.8 kg)	2	20.3" x 9.7" x 12"	11.4 lbs	810128118255	10810128118252
ASD-OLWS-21-18N20BK-MS	7" x 3-9/16" x 17-15/16"		2	20.3" x 9.7" x 12"	11.4 lbs	810128118248	10810128118245
OLWS-21-PC WITH PHOTOCELL							
ASD-OLWS-21-N15CC-PC-NK	7" x 3-1/4" x 10-7/16"	2.2 lbs (1 kg)	4	12.4" x 18.9" x 10"	11.9 lbs	810050737760	10810050737767
ASD-OLWS-21-10N15CC-PC-NK-2PACK	7" x 3-1/4" x 10-7/16"	4.4 lbs (2 kg)	4 (2)	12.4" x 18.9" x 9.7"	11.3 lbs	810128113502	10810128113509
ASD-OLWS-21-N15CC-PC-BZ	7" x 3-1/4" x 10-7/16"	2.2 lbs (1 kg)	4	12.4" x 18.9" x 10"	11.9 lbs	810050737753	10810050737750
ASD-OLWS-21-10N15CC-PC-BZ-2PACK	7" x 3-1/4" x 10-7/16"	4.4 lbs (2 kg)	4 (2)	12.4" x 18.9" x 9.7"	11.3 lbs	810128111195	10810128111192
ASD-OLWS-21-MV-10N15NK-PC	7" x 3-1/4" x 10-7/16"	2.2 lbs (1 kg)	2	10.2" x 9.7" x 12.4"	6 lbs	810128117319	10810128117316
ASD-OLWS-21-MV-10N15BK-PC	7" x 3-1/4" x 10-7/16"		2	10.2" x 9.7" x 12.4"	6 lbs	810128117302	10810128117309

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

