
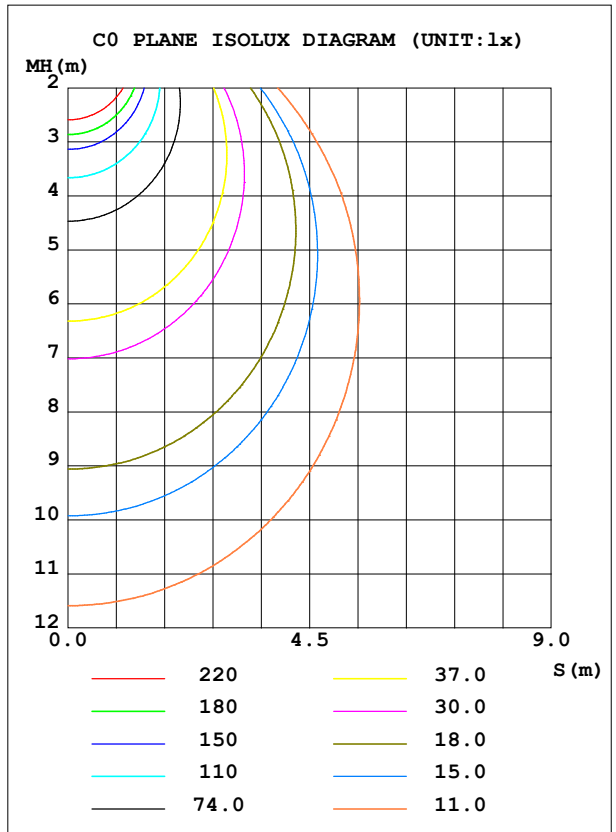


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ASD-CDL7S-8A35WH	Imax (cd)	1477	S/MH (C0/180)	1.22
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	277	TOTAL FLUX (lm)	3711.8	<input type="checkbox"/> UP, DN (C0-180)	0.1,50.9
NOMINAL FLUX (lm)	3711.78	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.2,48.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	277	<input type="checkbox"/> down (%)	99.7	CIBSE SHR MAX	1.35

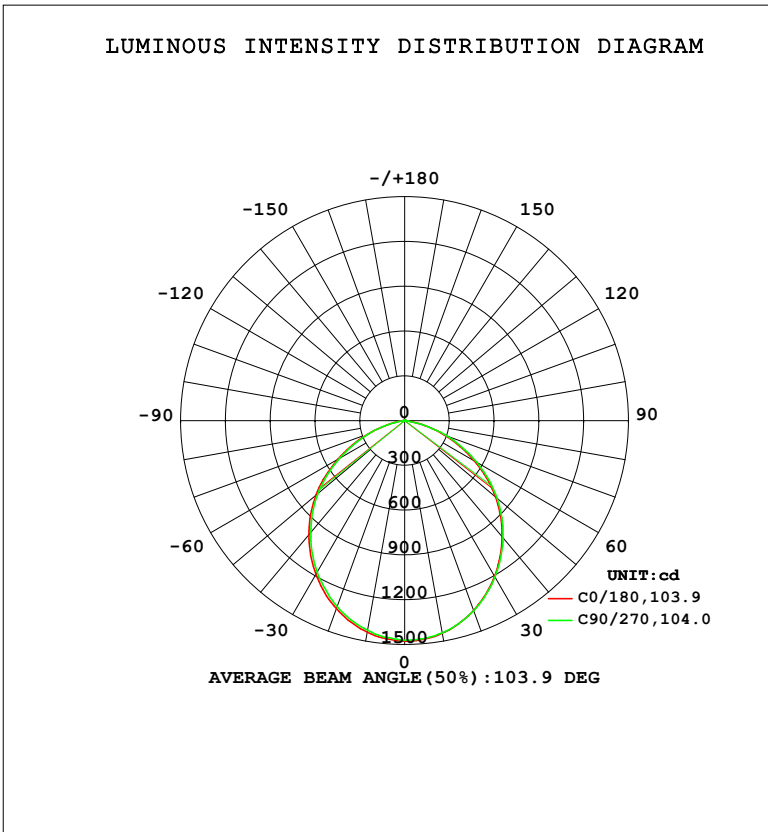

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1446	1445	1444	1438	1440	1429	1426	1430	0- 10	138.7	138.7	3.74,3.74
20	1352	1356	1354	1346	1340	1325	1325	1331	10- 20	393.5	532.2	14.3,14.3
30	1205	1213	1210	1200	1190	1176	1173	1183	20- 30	585.9	1118	30.1,30.1
40	1016	1031	1025	1016	998.5	987.2	979.8	996.7	30- 40	689.9	1808	48.7,48.7
50	795.3	820.6	809.0	805.8	776.3	774.6	757.9	785.1	40- 50	694.8	2503	67.4,67.4
60	540.9	587.0	557.0	571.3	515.0	538.2	500.0	549.4	50- 60	598.6	3101	83.6,83.6
70	283.5	322.7	300.1	306.1	258.2	272.6	252.8	287.7	60- 70	410.3	3512	94.6,94.6
80	61.92	66.09	40.89	57.69	48.04	49.30	34.18	59.35	70- 80	174.8	3687	99.3,99.3
90	1.368	1.441	1.264	1.625	2.109	2.423	2.102	2.693	80- 90	14.80	3701	99.7,99.7
100	1.992	1.953	1.946	1.966	3.193	3.277	3.245	3.372	90-100	2.327	3704	99.8,99.8
110	3.127	3.068	3.023	3.068	4.603	4.662	4.631	4.656	100-110	3.397	3707	99.9,99.9
120	4.410	4.313	4.300	4.320	5.983	6.002	6.015	6.002	110-120	4.474	3712	100,100
130	0	0	0	0	0	0	0	0	120-130	0.2439	3712	100,100
140	0	0	0	0	0	0	0	0	130-140	0	3712	100,100
150	0	0	0	0	0	0	0	0	140-150	0	3712	100,100
160	0	0	0	0	0	0	0	0	150-160	0	3712	100,100
170	0	0	0	0	0	0	0	0	160-170	0	3712	100,100
180	0	0	0	0	0	0	0	0	170-180	0	3712	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2161.1 lm

%lum = 58.2%

%lamp = 58.2%

Conical surface Flux(130deg): 3334.2 lm

%lum = 89.8%


%lamp = 89.8%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

□ Range: 0 - 120DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

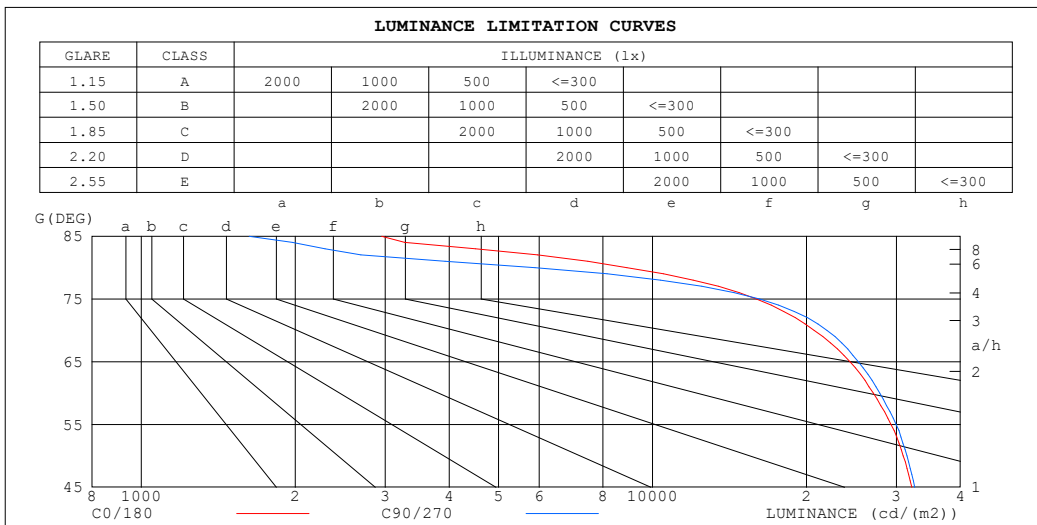

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2951	1626
80	8915	5887
75	15986	16201
70	20724	21937
65	24329	25268
60	27047	27851
55	29281	29949
50	30932	31466
45	32163	32578


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz		
UTHDI:0.00% ITHDI:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.02	.98	1.03	.00	.96	.99	.96	.93	.95	.93	.90	.91	.90	.88	.86
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.78	.75	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.75	.69	.65	.72	.68	.64	.62
4.0	.73	.64	.58	.71	.64	.58	.69	.62	.57	.67	.61	.56	.64	.59	.55	.53
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.49	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.53	.47	.43	.41
7.0	.53	.45	.39	.53	.45	.39	.51	.44	.38	.50	.43	.38	.48	.42	.38	.36
8.0	.49	.40	.35	.48	.40	.35	.47	.40	.34	.46	.39	.34	.44	.38	.34	.32
9.0	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.41	.34	.28	.41	.33	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26

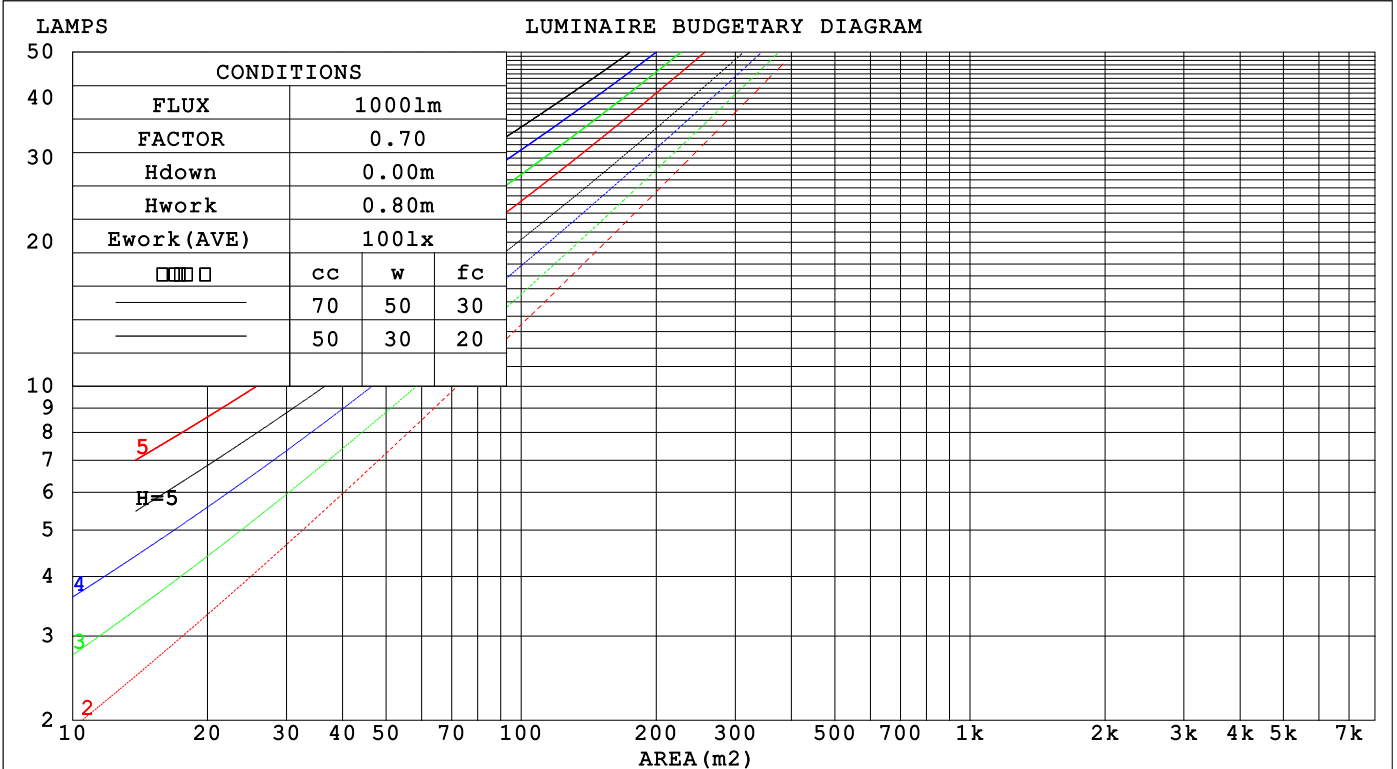

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

□ Range: 0 - 120DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.278 .158 .050	.271 .155 .049	.258 .148 .047	.246 .142 .046	.235 .136 .044	
2.0	.270 .148 .045	.264 .145 .045	.252 .140 .044	.241 .135 .042	.231 .131 .041	
3.0	.254 .135 .040	.248 .133 .040	.238 .129 .039	.228 .125 .038	.220 .122 .038	
4.0	.237 .123 .036	.232 .121 .036	.223 .118 .035	.214 .115 .035	.206 .112 .034	
5.0	.221 .112 .033	.216 .111 .032	.208 .108 .032	.201 .106 .031	.194 .103 .031	
6.0	.206 .103 .030	.202 .102 .029	.195 .100 .029	.188 .098 .029	.182 .096 .028	
7.0	.192 .095 .027	.189 .094 .027	.183 .092 .027	.177 .090 .026	.171 .089 .026	
8.0	.180 .088 .025	.177 .087 .025	.172 .086 .024	.166 .084 .024	.161 .083 .024	
9.0	.170 .082 .023	.167 .081 .023	.162 .080 .023	.157 .079 .022	.152 .077 .022	
10.0	.160 .077 .021	.157 .076 .021	.153 .075 .021	.148 .074 .021	.144 .072 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.193 .193 .193	.165 .165 .165	.112 .112 .112	.065 .065 .065	.021 .021 .021	
1.0	.180 .159 .139	.154 .136 .120	.106 .094 .083	.061 .054 .048	.019 .017 .016	
2.0	.171 .134 .103	.147 .116 .089	.101 .080 .062	.058 .046 .036	.019 .015 .012	
3.0	.164 .116 .079	.140 .100 .068	.096 .070 .048	.056 .041 .028	.018 .013 .009	
4.0	.156 .103 .062	.134 .089 .054	.092 .062 .038	.053 .036 .023	.017 .012 .007	
5.0	.149 .092 .051	.128 .080 .044	.088 .056 .031	.051 .033 .019	.016 .011 .006	
6.0	.142 .084 .042	.122 .073 .037	.084 .051 .026	.049 .030 .016	.016 .010 .005	
7.0	.135 .077 .036	.116 .067 .032	.080 .047 .022	.047 .028 .013	.015 .009 .004	
8.0	.129 .071 .032	.111 .062 .028	.077 .043 .020	.045 .026 .012	.014 .008 .004	
9.0	.123 .066 .028	.106 .058 .024	.073 .040 .017	.043 .024 .010	.014 .008 .003	
10.0	.118 .062 .025	.101 .054 .022	.070 .038 .016	.041 .022 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.0	26.4	26.6	24.8	26.2	25.1	26.4	26.7
3H	25.8	27.2	26.1	27.4	27.7	26.0	27.3	26.3	27.5	27.8
4H	26.2	27.4	26.5	27.7	28.0	26.3	27.6	26.6	27.8	28.1
6H	26.3	27.5	26.6	27.7	28.0	26.3	27.5	26.6	27.8	28.1
8H	26.2	27.4	26.6	27.7	28.0	26.3	27.4	26.6	27.7	28.0
12H	26.2	27.3	26.5	27.6	27.9	26.2	27.3	26.6	27.6	27.9
4H 2H	25.3	26.6	25.6	26.8	27.1	25.4	26.6	25.7	26.9	27.1
3H	26.6	27.7	27.0	28.0	28.3	26.7	27.8	27.0	28.1	28.4
4H	27.0	28.0	27.4	28.4	28.7	27.1	28.1	27.5	28.4	28.8
6H	27.2	28.1	27.6	28.4	28.8	27.2	28.0	27.6	28.4	28.8
8H	27.2	28.0	27.6	28.4	28.8	27.1	27.9	27.5	28.3	28.7
12H	27.2	27.9	27.6	28.3	28.7	27.1	27.8	27.5	28.2	28.6
8H 4H	27.2	28.0	27.6	28.4	28.7	27.2	28.0	27.6	28.4	28.8
6H	27.4	28.1	27.8	28.5	28.9	27.3	28.0	27.8	28.4	28.8
8H	27.4	28.0	27.9	28.4	28.9	27.3	27.9	27.7	28.3	28.8
12H	27.4	27.9	27.9	28.4	28.8	27.3	27.8	27.7	28.2	28.7
12H 4H	27.1	27.9	27.6	28.3	28.7	27.2	27.9	27.6	28.3	28.7
6H	27.4	28.0	27.8	28.4	28.9	27.3	27.9	27.8	28.3	28.8
8H	27.4	27.9	27.9	28.4	28.8	27.3	27.8	27.8	28.2	28.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
1.5H	+ 0.2 / - 0.5	+ 0.2 / - 0.5
2.0H	+ 0.3 / - 0.5	+ 0.4 / - 0.5

CIE Pub.117, 3712 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)
 Area: 0.04 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	48	42	59	48	42	58	48	41	35
0.80	70	59	52	69	58	52	67	58	51	45
1.00	78	68	61	77	67	61	75	69	60	53
1.25	85	76	69	84	75	69	81	74	68	61
1.50	90	81	75	89	80	74	86	79	73	66
2.00	97	89	83	95	88	82	92	86	81	73
2.50	101	94	88	99	92	87	95	90	85	77
3.00	104	98	93	102	96	91	98	93	89	81
4.00	108	102	98	105	101	97	101	97	94	86
5.00	110	105	102	107	104	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

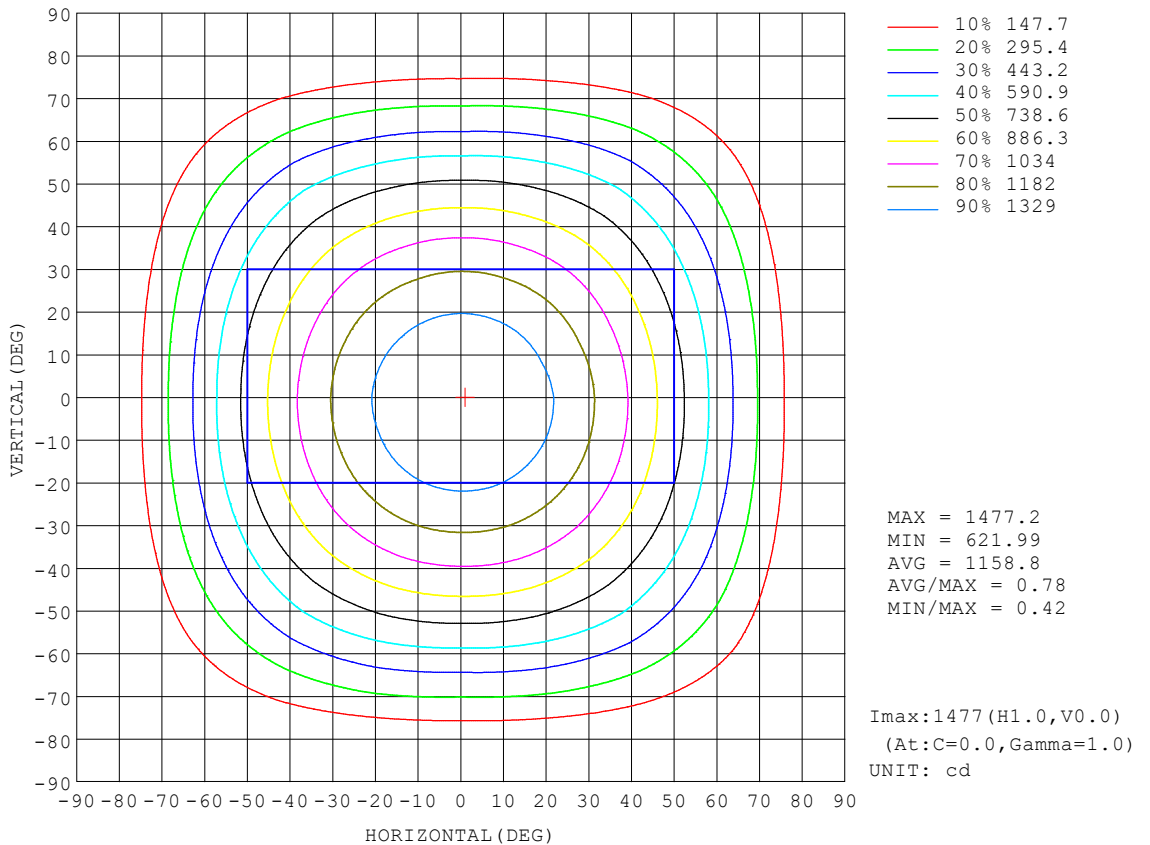


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

AAI Figure

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

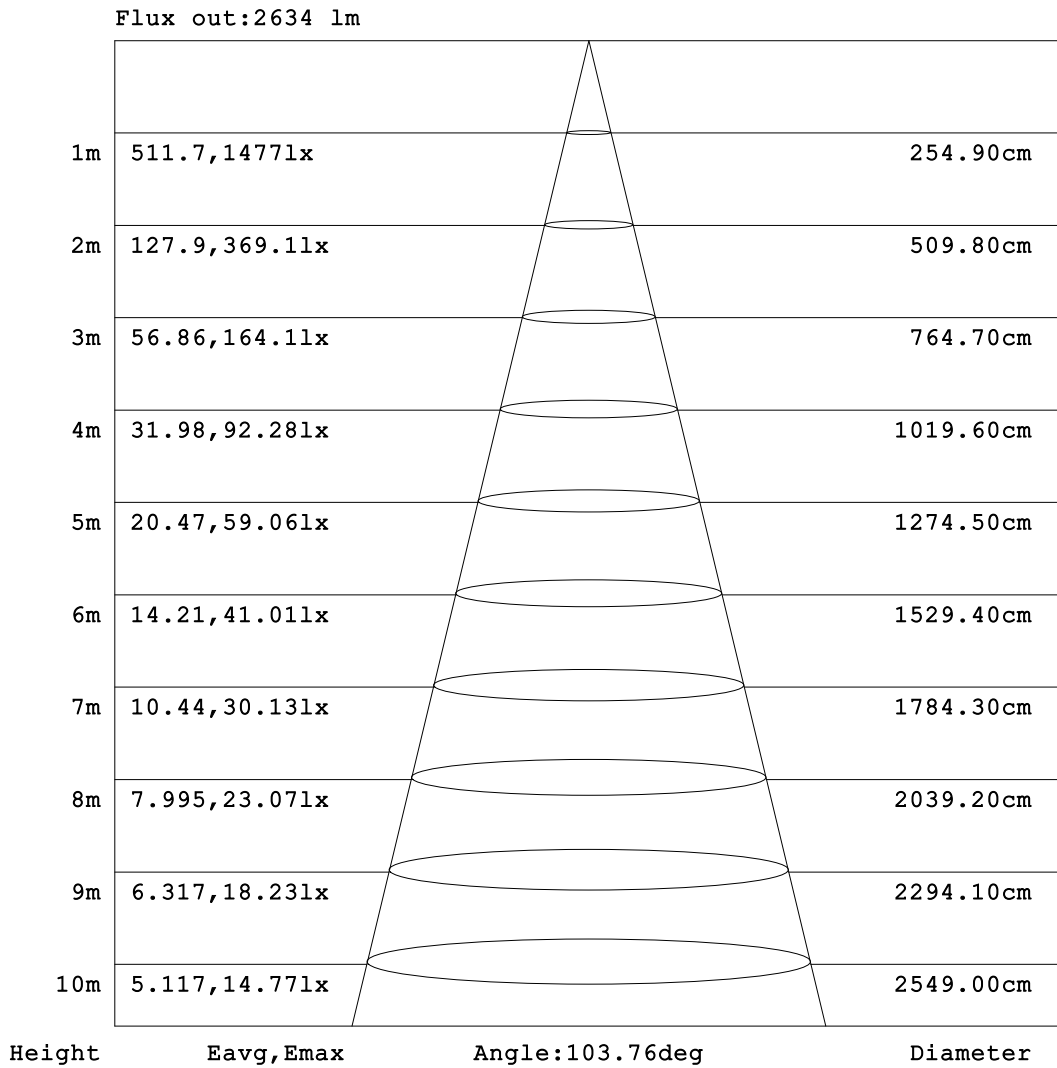


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

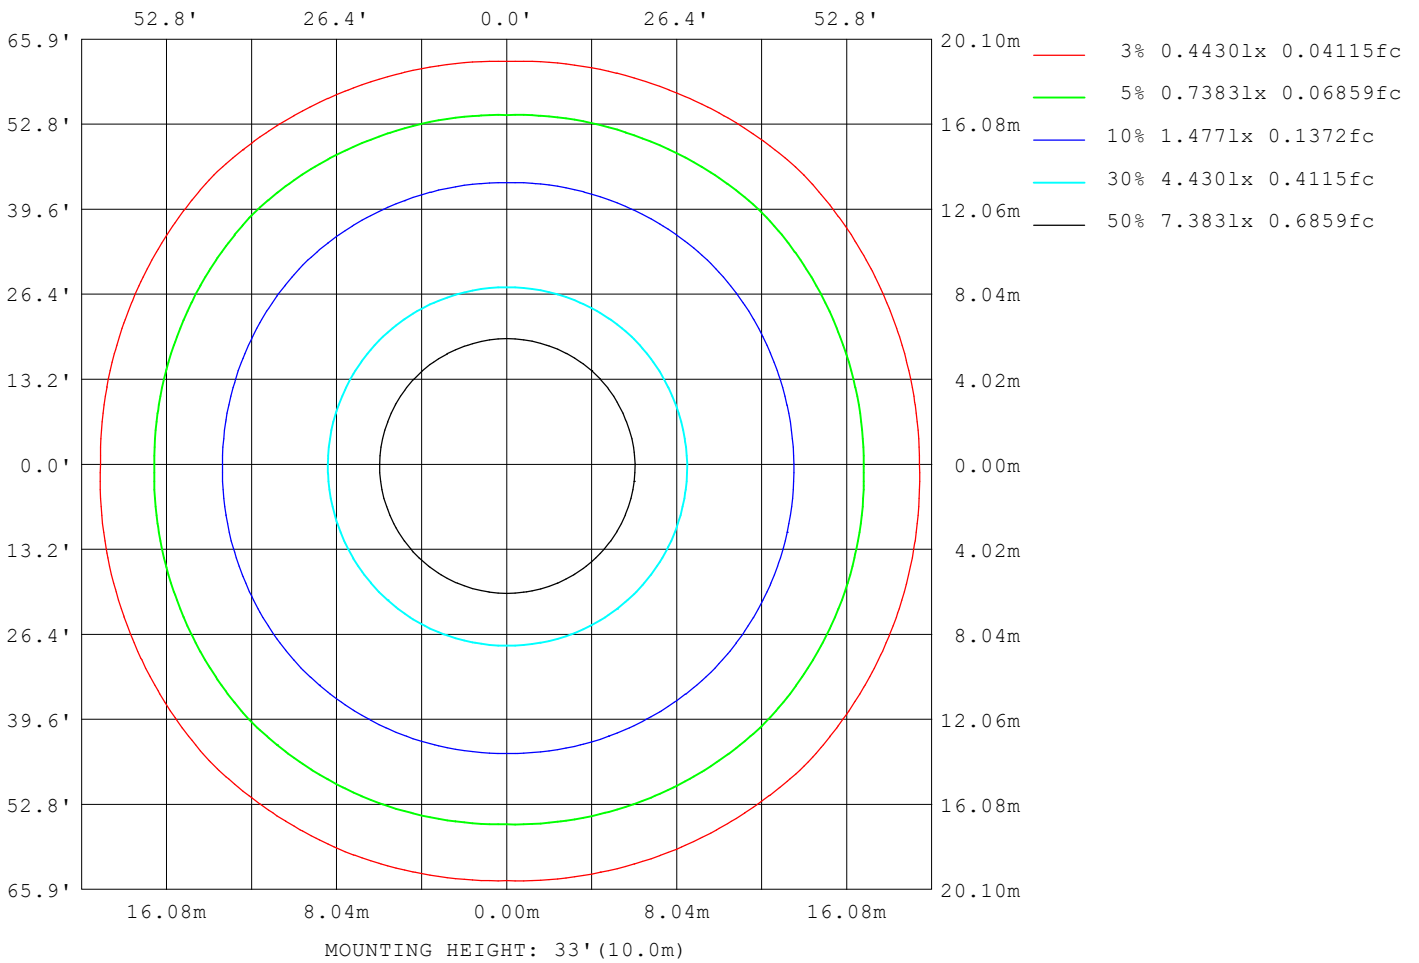

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23559
L_0~180 (75) av	14848
L_0~180 (85) av	2736
L_90~270 (65) av	23660
L_90~270 (75) av	14817
L_90~270 (85) av	1681
L_45 (65) av	25408
L_45 (75) av	16656
L_45 (85) av	2074

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

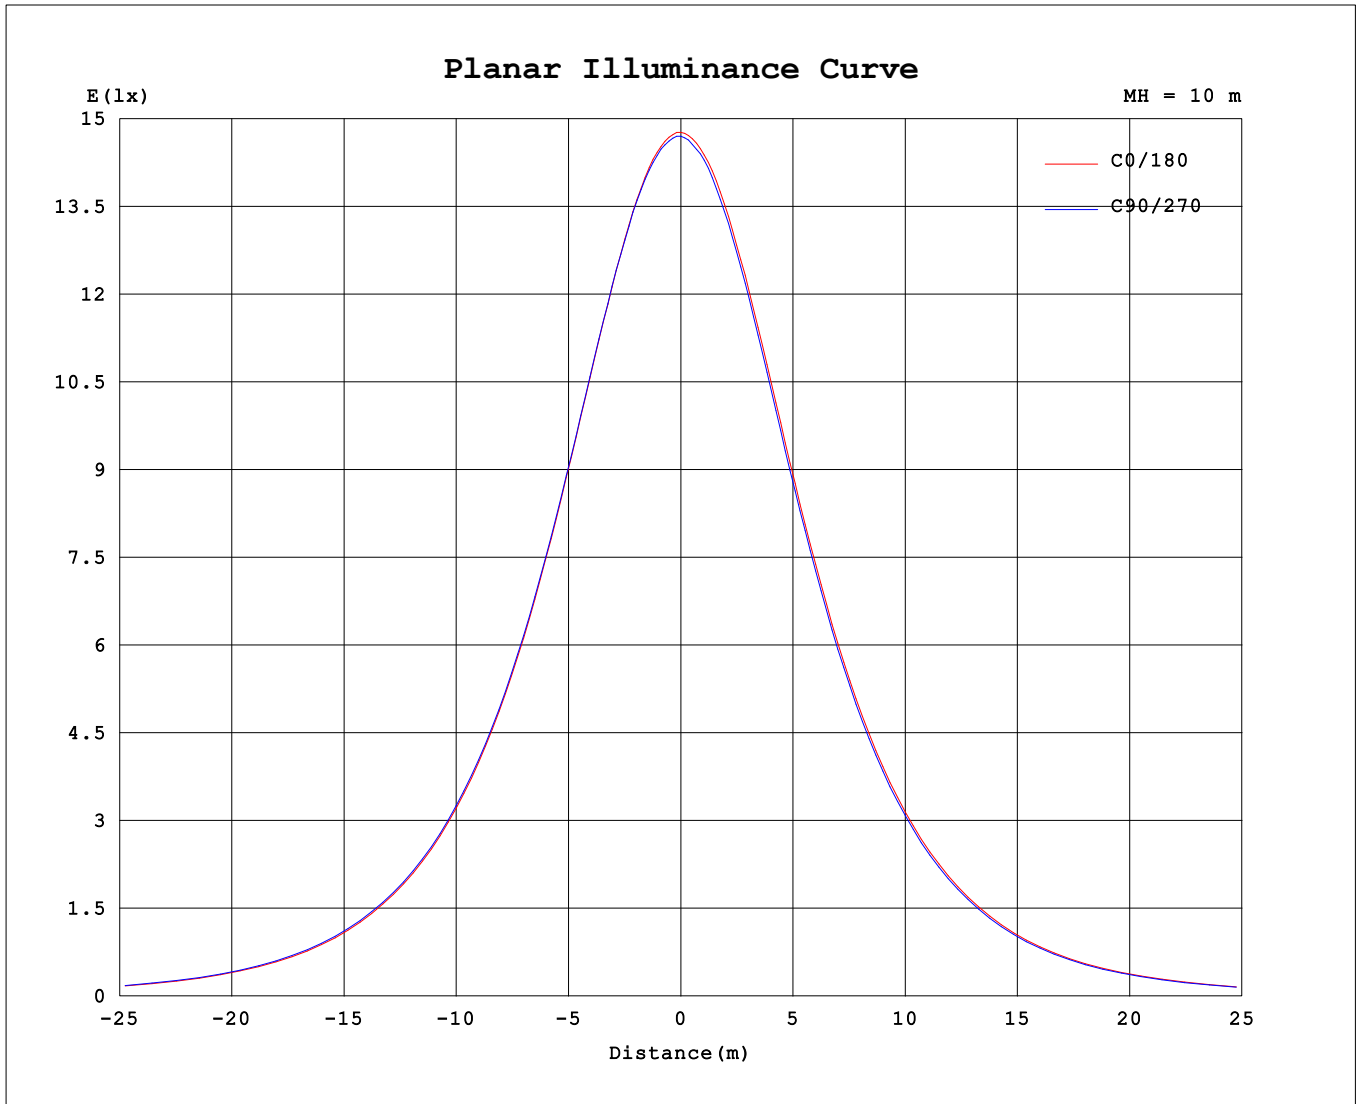

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-3-12

Range: 0 - 120DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.36V I:0.1309A P:32.673W PF:0.8998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3711.78x1 lm		
NAME: ASD-CDL7S-8A35WH	TYPE: 35W	WEIGHT:
SPEC.: N/A	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting Corp	SUR.: 0.2*0.2	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1477	1473	1470	1468	1470	1468	1467	1467	1477	1473	1470	1468	1470	1468	1467	1467			
5	1470	1468	1467	1465	1465	1463	1461	1459	1466	1461	1459	1454	1457	1455	1457	1459			
10	1446	1446	1445	1444	1444	1441	1438	1434	1440	1434	1429	1426	1426	1429	1430	1432			
15	1407	1408	1408	1407	1407	1402	1400	1395	1397	1390	1385	1382	1384	1383	1388	1391			
20	1352	1356	1356	1356	1354	1351	1346	1340	1340	1332	1325	1324	1325	1326	1331	1336			
25	1284	1289	1290	1290	1288	1284	1279	1272	1270	1262	1256	1252	1252	1256	1262	1267			
30	1205	1211	1213	1213	1210	1207	1200	1193	1190	1180	1176	1170	1173	1175	1183	1188			
35	1114	1123	1126	1125	1122	1119	1112	1102	1098	1089	1085	1079	1080	1084	1093	1098			
40	1016	1026	1031	1031	1025	1024	1016	1006	998	990	987	981	980	985	997	1001			
45	910	922	928	928	921	920	913	900	891	884	884	875	873	880	893	897			
50	795	811	821	818	809	812	806	790	776	773	775	763	758	769	785	787			
55	672	693	707	700	687	694	692	669	649	652	661	642	631	649	671	668			
60	541	566	587	574	557	568	571	538	515	522	538	513	500	520	549	541			
65	411	439	457	445	427	441	440	409	385	394	404	386	373	392	418	415			
70	284	313	323	315	300	314	306	283	258	268	273	264	253	270	288	290			
75	165	191	189	179	168	174	177	164	142	151	154	145	139	152	169	172			
80	61.9	83.3	66.1	45.3	40.9	43.9	57.7	62.8	48.0	55.1	49.3	32.9	34.2	40.2	59.3	71.4			
85	10.3	10.7	7.51	6.14	5.67	5.96	6.39	8.45	8.79	8.37	6.91	5.97	6.05	6.62	8.12	10.4			
90	1.37	1.41	1.44	1.33	1.26	1.30	1.62	1.37	2.11	2.48	2.42	2.17	2.10	2.39	2.69	2.49			
95	1.53	1.57	1.52	1.57	1.51	1.64	1.52	1.60	2.57	2.56	2.65	2.57	2.61	2.64	2.64	2.51			
100	1.99	2.01	1.95	2.02	1.95	2.06	1.97	2.06	3.19	3.19	3.28	3.24	3.24	3.37	3.37	3.13			
105	2.53	2.54	2.48	2.52	2.44	2.53	2.49	2.57	3.86	3.85	3.95	3.89	3.91	3.93	3.98	3.79			
110	3.13	3.12	3.07	3.10	3.02	3.08	3.07	3.17	4.60	4.56	4.66	4.60	4.63	4.62	4.66	4.50			
115	3.76	3.76	3.67	3.71	3.66	3.72	3.69	3.80	5.33	5.28	5.37	5.31	5.35	5.31	5.35	5.21			
120	4.41	4.38	4.31	4.33	4.30	4.31	4.32	4.40	5.98	5.98	6.00	6.00	6.02	5.98	6.00	5.89			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-3-12

□ Range: 0 - 120DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.600m [K=1.0000]
 Remarks: