
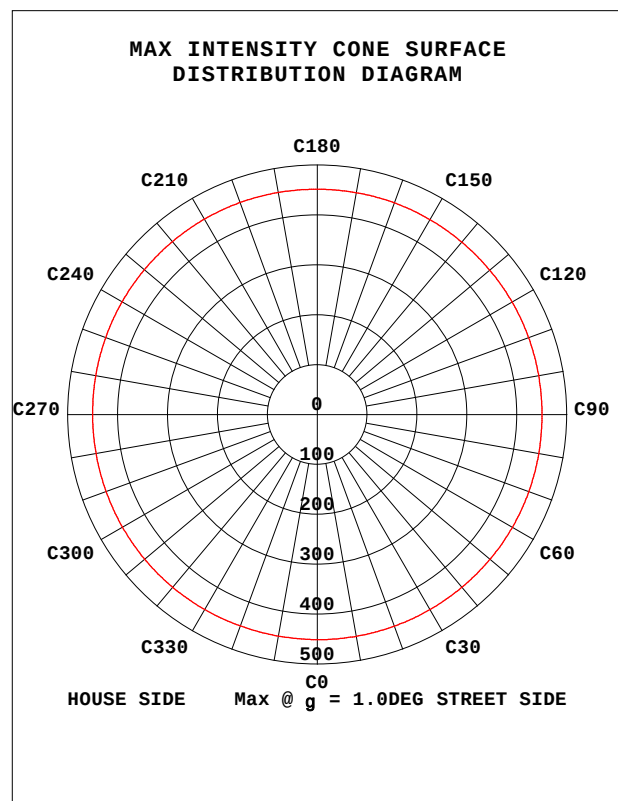


## STREETLIGHT PHOTOMETRIC TEST REPORT

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

| DATA OF LAMP                |         | PHOTOMETRIC DATA Eff: 86.41 lm/W |         |                  |         |
|-----------------------------|---------|----------------------------------|---------|------------------|---------|
| MODEL: JBR-6D15AC-XX(5000K) |         | Imax(cd)                         | 452.4   | h street_up(%)   | 0.2     |
| NOMINAL POWER(W)            | 15      | LOR(%)                           | 100.0   | h street_down(%) | 48.5    |
| RATED VOLTAGE(V)            | 120     | TOTAL FLUX(lm)                   | 1287    | h house_up(%)    | 0.2     |
| NOMINAL FLUX(lm)            | 1287.25 | MAXIMUM @(C, g )                 | 203,1.0 | h house_down(%)  | 51.1    |
| LAMPS INSIDE                | 1       | h up(%)                          | 0.4     | 76 FLASHAREA(m2) | 0.00100 |
| TEST VOLTAGE(V)             | 120     | h down(%)                        | 99.6    | SLI              | 17.175  |

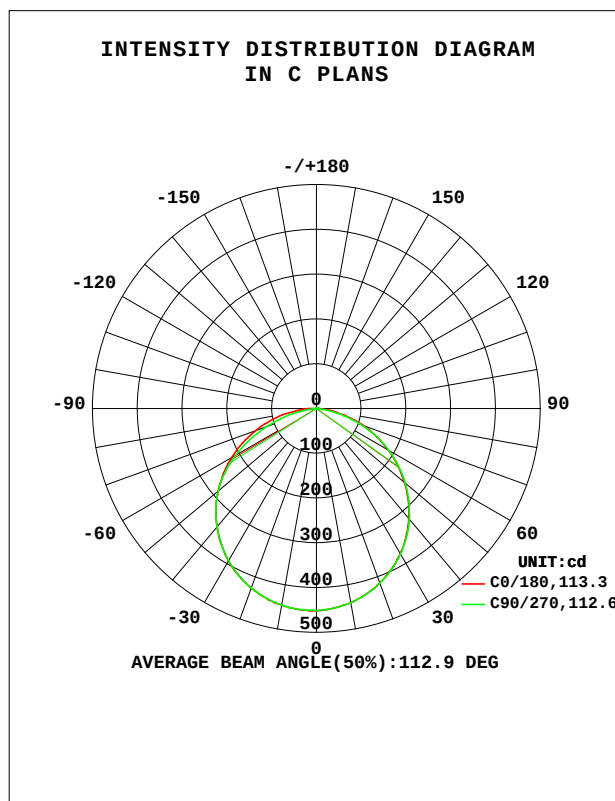


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 18 January 2025

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0115]  
 Remarks:

## STREETLIGHT ISOCANDELA DIAGRAM

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

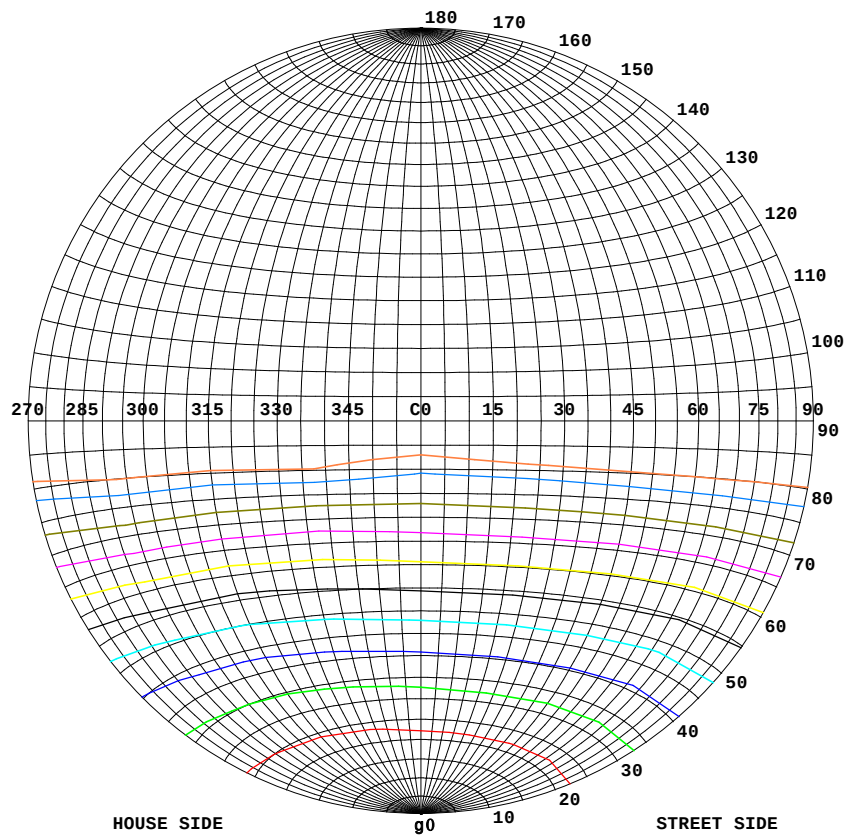


## Classification:

IES:Type V - Very Short  
CIE:Narrow - Short  
IES:Cut-off  
CIE:Semi-cut-off  
Max.At80:54.04cd/klm  
Max.At90:7.007cd/klm  
Max.80-90:54.04cd/klm

| ISOCANDELA DIAGRAM     |     |
|------------------------|-----|
| UNIT                   | cd  |
| I <sub>max</sub> =100% | 452 |
| 90%                    | 407 |
| 80%                    | 362 |
| 70%                    | 317 |
| 60%                    | 271 |
| 50%                    | 226 |
| 40%                    | 181 |
| 30%                    | 136 |
| 20%                    | 90  |
| 10%                    | 45  |
| 5%                     | 23  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:8.700m [K=1.0115]  
Remarks:

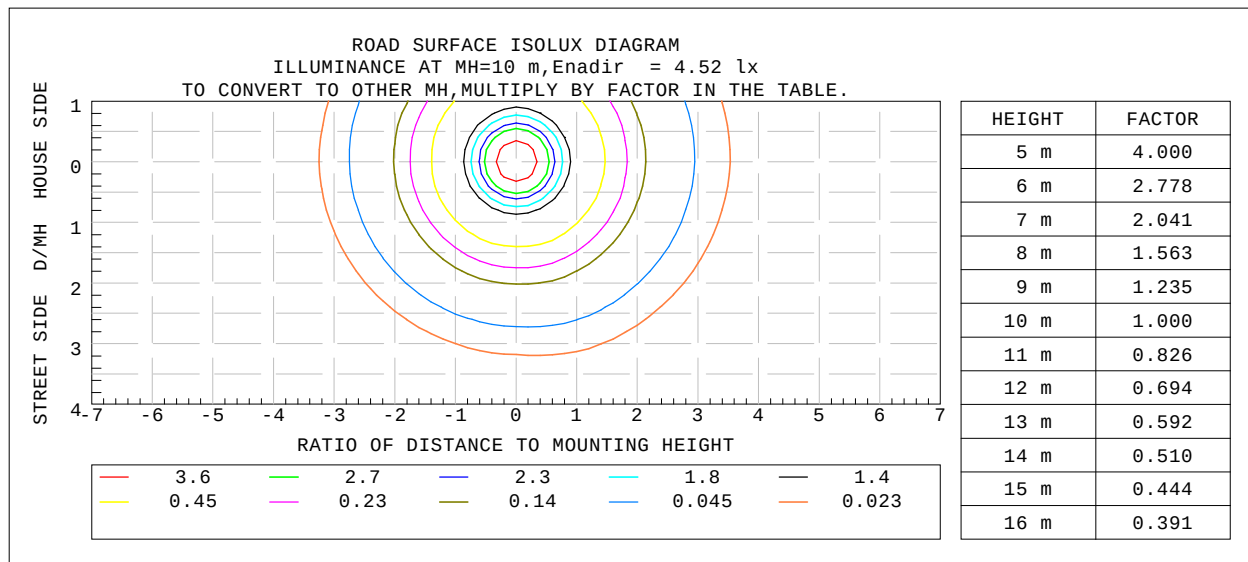**COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM**

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity: 65.0%  
Test Distance: 8.700m [K=1.0115]  
Remarks:

## ZONAL FLUX DIAGRAM

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |


| g   | C0                    | C45    | C90    | C135   | C180   | C225   | C270   | C315   | g       | F zone   | F total | %lum, lamp |
|-----|-----------------------|--------|--------|--------|--------|--------|--------|--------|---------|----------|---------|------------|
| 10  | 440.7                 | 439.8  | 440.6  | 443.6  | 445.6  | 447.5  | 445.9  | 443.5  | 0- 10   | 42.71    | 42.71   | 3.32, 3.32 |
| 20  | 414.3                 | 414.4  | 414.7  | 421.5  | 426.6  | 429.3  | 426.3  | 420.7  | 10- 20  | 122.6    | 165.3   | 12.8, 12.8 |
| 30  | 374.4                 | 374.1  | 375.4  | 384.9  | 393.9  | 395.6  | 392.4  | 383.6  | 20- 30  | 186.5    | 351.8   | 27.3, 27.3 |
| 40  | 321.1                 | 319.8  | 323.0  | 334.6  | 345.4  | 349.0  | 344.6  | 332.6  | 30- 40  | 225.6    | 577.4   | 44.9, 44.9 |
| 50  | 257.1                 | 255.0  | 258.7  | 272.8  | 286.8  | 291.7  | 286.2  | 270.9  | 40- 50  | 235.0    | 812.4   | 63.1, 63.1 |
| 60  | 185.0                 | 183.2  | 186.5  | 202.8  | 218.2  | 221.6  | 207.7  | 196.8  | 50- 60  | 212.1    | 1025    | 79.6, 79.6 |
| 70  | 111.7                 | 105.2  | 106.0  | 127.5  | 144.2  | 139.0  | 118.0  | 111.6  | 60- 70  | 159.1    | 1184    | 92, 92     |
| 80  | 40.66                 | 24.57  | 24.29  | 51.51  | 69.56  | 53.98  | 30.84  | 26.35  | 70- 80  | 83.85    | 1268    | 98.5, 98.5 |
| 90  | 0.1090                | 0.1314 | 0.2203 | 0.7489 | 9.020  | 1.458  | 0.0876 | 0.1527 | 80- 90  | 14.53    | 1282    | 99.6, 99.6 |
| 100 | 0.3322                | 0.4988 | 1.120  | 0.3430 | 0.3055 | 0.2785 | 0.2723 | 0.4467 | 90-100  | 0.5081   | 1283    | 99.6, 99.6 |
| 110 | 0.5719                | 0.5561 | 0.5334 | 0.4683 | 0.5452 | 0.5347 | 0.5554 | 0.6049 | 100-110 | 0.4752   | 1283    | 99.7, 99.7 |
| 120 | 0.8062                | 0.7850 | 0.7618 | 0.7024 | 0.8013 | 0.7637 | 0.7895 | 0.8555 | 110-120 | 0.6539   | 1284    | 99.7, 99.7 |
| 130 | 1.024                 | 1.003  | 0.9959 | 0.9150 | 1.014  | 0.9656 | 1.007  | 1.035  | 120-130 | 0.7968   | 1284    | 99.8, 99.8 |
| 140 | 1.144                 | 1.145  | 1.148  | 1.084  | 1.177  | 1.156  | 1.176  | 1.188  | 130-140 | 0.8290   | 1285    | 99.8, 99.8 |
| 150 | 1.237                 | 1.249  | 1.284  | 1.220  | 1.330  | 1.304  | 1.317  | 1.329  | 140-150 | 0.7647   | 1286    | 99.9, 99.9 |
| 160 | 1.362                 | 1.396  | 1.426  | 1.422  | 1.417  | 1.412  | 1.410  | 1.411  | 150-160 | 0.6214   | 1287    | 100, 100   |
| 170 | 1.488                 | 1.516  | 1.546  | 1.536  | 1.608  | 1.576  | 1.546  | 1.574  | 160-170 | 0.4164   | 1287    | 100, 100   |
| 180 | 1.667                 | 1.641  | 1.622  | 1.667  | 1.678  | 1.647  | 1.627  | 1.672  | 170-180 | 0.1518   | 1287    | 100, 100   |
| DEG | LUMINOUS INTENSITY:cd |        |        |        |        |        |        |        |         | UNIT: lm |         |            |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 18 January 2025

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0115]  
 Remarks:

## ISOCANDELA DIAGRAM


|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

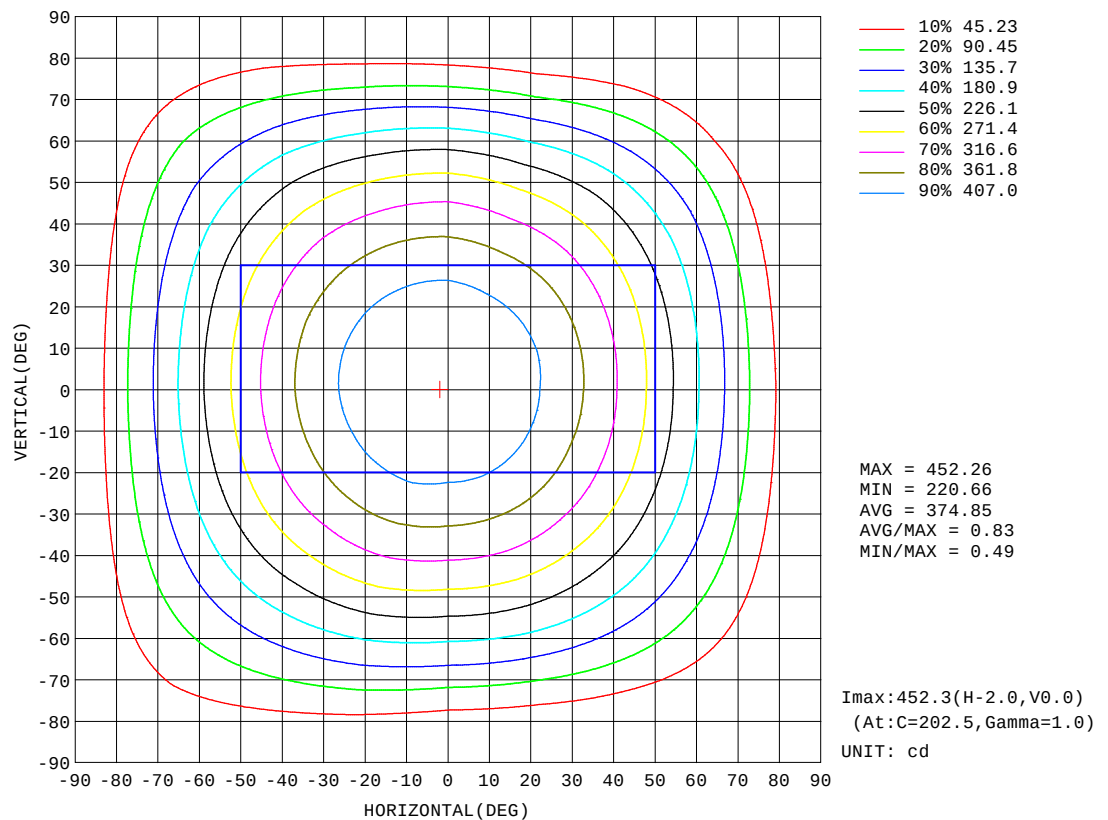

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity: 65.0%  
Test Distance: 8.700m [K=1.0115]  
Remarks:

## Planar Illuminance Curve

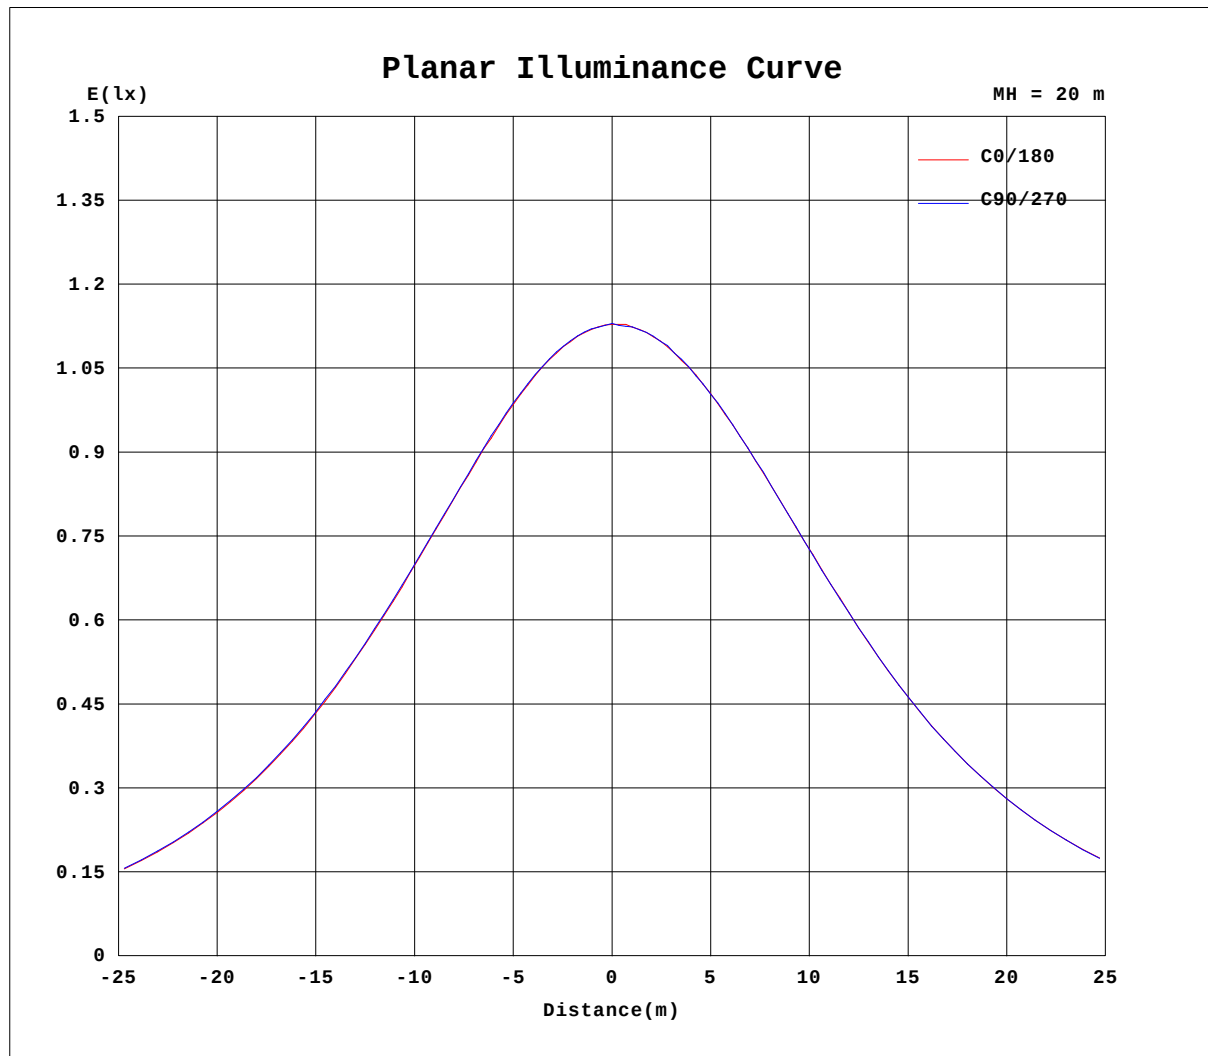


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity: 65.0%  
Test Distance: 8.700m [K=1.0115]  
Remarks:

## LCS REPORT

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

## LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

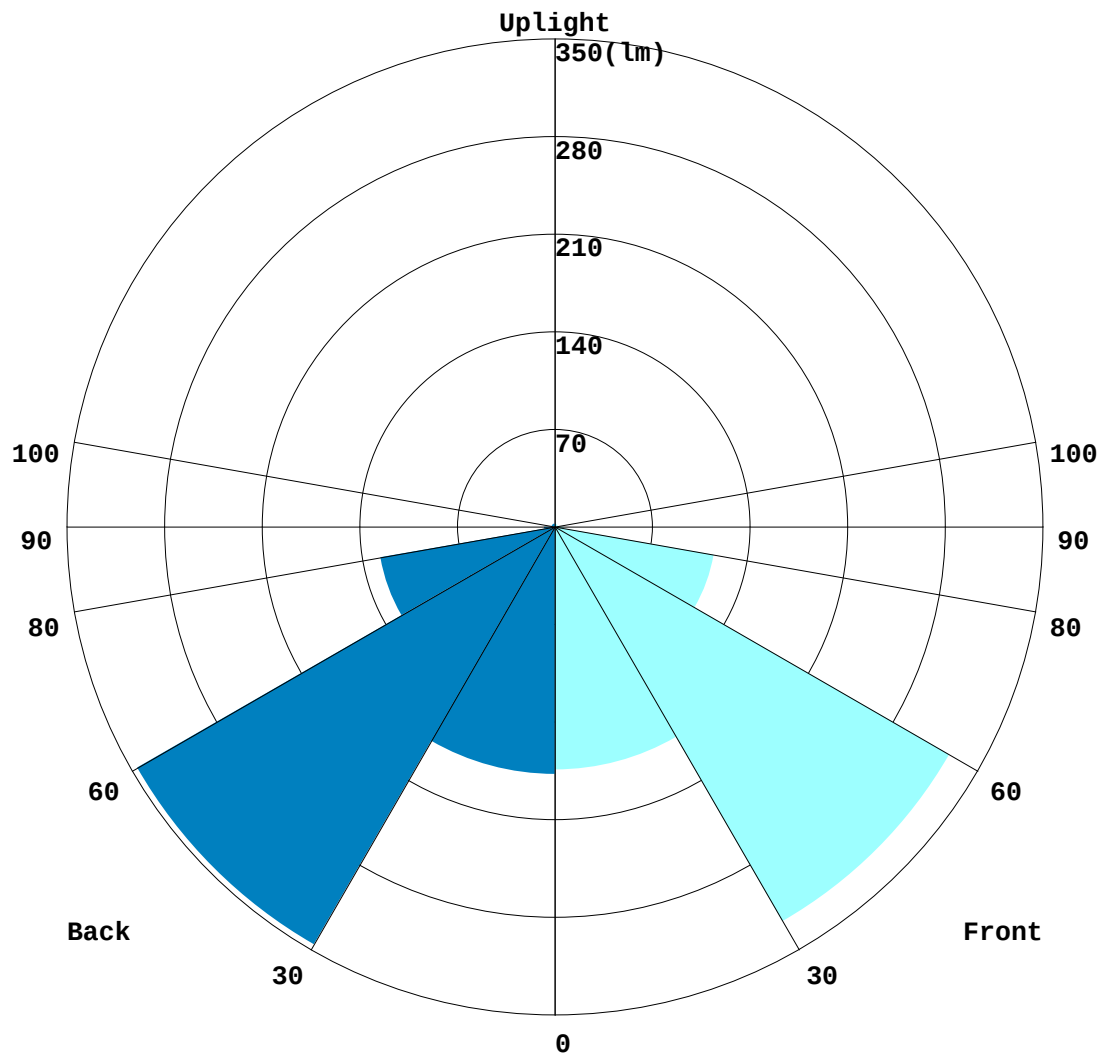

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:8.700m [K=1.0115]  
Remarks:

## BUG REPORT

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

## IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 174.26 | 13.5        |
| FM - Front-Medium(30-60)     | 326.88 | 25.4        |
| FH - Front-High(60-80)       | 115.95 | 9.0         |
| FVH - Front-Very High(80-90) | 6.6429 | 0.5         |
| Total Forward Light          | 626.32 | 48.7        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 177.49 | 13.8 |
| BM - Back-Medium(30-60)     | 345.86 | 26.9 |
| BH - Back-High(60-80)       | 127.04 | 9.9  |
| BVH - Back-Very High(80-90) | 7.8847 | 0.6  |
| Total Back Light            | 660.93 | 51.3 |

|                            |         |     |
|----------------------------|---------|-----|
| UL - Uplight-Low(90-100)   | 0.50812 | 0.0 |
| UH - Uplight-High(100-180) | 4.7092  | 0.4 |
| Total Up Light             | 5.2174  | 0.4 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B1-U1-G0 |
|---------------------------|----------|

| Zone        | Downward<br>Lumens | Upward<br>Lumens | Total<br>Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side  | 658.29             | 2.6397           | 660.93          |
| Street Side | 623.75             | 2.5777           | 626.32          |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:18 January 2025


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0115]  
 Remarks:



ROAD ISOCANDELA REPORT

|                                                                                  |       |                  |
|----------------------------------------------------------------------------------|-------|------------------|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |       |                  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   | TYPE: | WEIGHT:          |
| SPEC.:                                                                           | DIM.: | SERIAL No.:      |
| MFR.: ASD LIGHTING CORP                                                          | SUR.: | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

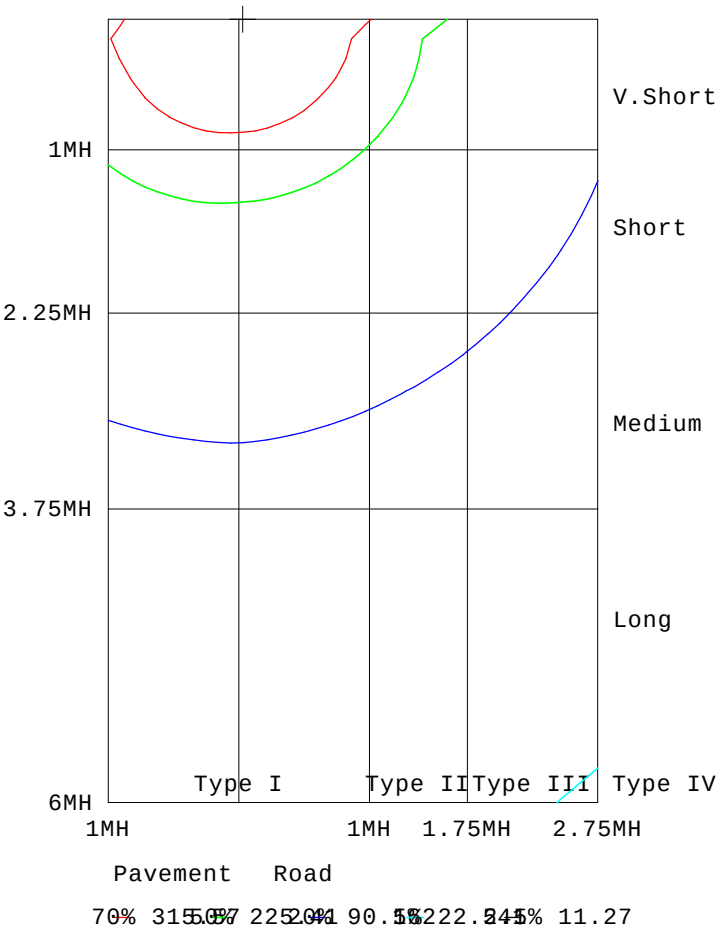

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:18 January 2025

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:8.700m [K=1.0115]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                                  |  |  |  |  |  |  |  |  |       |  |  |                  |  |  |  |  |  |
|----------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|-------|--|--|------------------|--|--|--|--|--|
| Test:U:120.05V I:0.1255A P:14.896W PF:0.9887 Freq:60.00Hz Lamp Flux:1287.25x1 lm |  |  |  |  |  |  |  |  |       |  |  |                  |  |  |  |  |  |
| NAME: ASD-JBR-6D15AC-XX(5000K)                                                   |  |  |  |  |  |  |  |  | TYPE: |  |  | WEIGHT:          |  |  |  |  |  |
| SPEC.:                                                                           |  |  |  |  |  |  |  |  | DIM.: |  |  | SERIAL No.:      |  |  |  |  |  |
| MFR.: ASD LIGHTING CORP                                                          |  |  |  |  |  |  |  |  | SUR.: |  |  | Shielding Angle: |  |  |  |  |  |

Table--1

UNIT: cd

| C(DEG)<br>g (DEG) | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|-------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                 | 451  | 451  | 451  | 451  | 451  | 451   | 451  | 451   | 451  | 451   | 451  | 451   | 451  | 451   | 451  | 451   |  |  |  |
| 5                 | 448  | 447  | 448  | 448  | 448  | 449   | 449  | 451   | 451  | 452   | 452  | 452   | 450  | 449   | 449  | 448   |  |  |  |
| 10                | 441  | 440  | 440  | 442  | 441  | 443   | 444  | 445   | 446  | 448   | 447  | 448   | 446  | 444   | 443  | 442   |  |  |  |
| 15                | 430  | 429  | 429  | 431  | 430  | 433   | 434  | 436   | 438  | 440   | 440  | 440   | 438  | 435   | 434  | 432   |  |  |  |
| 20                | 414  | 414  | 414  | 416  | 415  | 420   | 422  | 424   | 427  | 429   | 429  | 428   | 426  | 423   | 421  | 418   |  |  |  |
| 25                | 396  | 395  | 396  | 397  | 397  | 402   | 405  | 408   | 411  | 414   | 414  | 414   | 411  | 406   | 403  | 400   |  |  |  |
| 30                | 374  | 373  | 374  | 376  | 375  | 382   | 385  | 389   | 394  | 396   | 396  | 395   | 392  | 386   | 384  | 380   |  |  |  |
| 35                | 350  | 348  | 349  | 350  | 351  | 358   | 361  | 366   | 371  | 374   | 374  | 374   | 371  | 363   | 360  | 355   |  |  |  |
| 40                | 321  | 320  | 320  | 323  | 323  | 331   | 335  | 340   | 345  | 349   | 349  | 349   | 345  | 336   | 333  | 327   |  |  |  |
| 45                | 290  | 289  | 289  | 292  | 292  | 302   | 305  | 311   | 318  | 321   | 322  | 320   | 318  | 307   | 303  | 296   |  |  |  |
| 50                | 257  | 255  | 255  | 259  | 259  | 270   | 273  | 280   | 287  | 291   | 292  | 289   | 286  | 275   | 271  | 264   |  |  |  |
| 55                | 221  | 219  | 220  | 224  | 224  | 235   | 238  | 246   | 254  | 258   | 259  | 253   | 249  | 237   | 236  | 229   |  |  |  |
| 60                | 185  | 183  | 183  | 186  | 187  | 198   | 203  | 210   | 218  | 222   | 222  | 213   | 208  | 195   | 197  | 193   |  |  |  |
| 65                | 149  | 145  | 146  | 146  | 148  | 160   | 166  | 173   | 182  | 185   | 181  | 171   | 163  | 152   | 155  | 156   |  |  |  |
| 70                | 112  | 107  | 105  | 104  | 106  | 121   | 128  | 136   | 144  | 147   | 139  | 127   | 118  | 108   | 112  | 116   |  |  |  |
| 75                | 72.9 | 69.9 | 65.0 | 62.0 | 64.2 | 79.7  | 89.5 | 99.1  | 107  | 108   | 95.8 | 82.5  | 73.5 | 63.5  | 68.0 | 68.4  |  |  |  |
| 80                | 40.7 | 31.8 | 24.6 | 21.8 | 24.3 | 39.9  | 51.5 | 63.2  | 69.6 | 64.9  | 54.0 | 40.1  | 30.8 | 21.7  | 26.4 | 23.7  |  |  |  |
| 85                | 7.40 | 1.68 | 3.95 | 5.14 | 5.16 | 5.13  | 15.4 | 29.5  | 34.3 | 20.8  | 15.5 | 5.61  | 1.16 | 0.35  | 0.35 | 4.83  |  |  |  |
| 90                | 0.11 | 0.17 | 0.13 | 0.24 | 0.22 | 0.62  | 0.75 | 1.83  | 9.02 | 2.55  | 1.46 | 0.16  | 0.09 | 0.59  | 0.15 | 0.16  |  |  |  |
| 95                | 0.21 | 0.40 | 0.79 | 0.35 | 0.21 | 0.26  | 0.16 | 0.21  | 0.16 | 0.19  | 0.18 | 0.76  | 0.67 | 1.21  | 0.24 | 0.28  |  |  |  |
| 100               | 0.33 | 0.43 | 0.50 | 0.39 | 1.12 | 1.37  | 0.34 | 0.35  | 0.31 | 0.31  | 0.28 | 0.29  | 0.27 | 0.27  | 0.45 | 0.36  |  |  |  |
| 105               | 0.44 | 0.51 | 0.48 | 0.56 | 0.35 | 0.34  | 0.35 | 0.41  | 0.41 | 0.37  | 0.41 | 0.40  | 0.56 | 0.51  | 0.50 | 0.45  |  |  |  |
| 110               | 0.57 | 0.62 | 0.56 | 0.58 | 0.53 | 0.52  | 0.47 | 0.52  | 0.55 | 0.48  | 0.53 | 0.48  | 0.56 | 0.52  | 0.60 | 0.57  |  |  |  |
| 115               | 0.69 | 0.74 | 0.68 | 0.69 | 0.64 | 0.64  | 0.57 | 0.63  | 0.68 | 0.59  | 0.65 | 0.61  | 0.67 | 0.66  | 0.73 | 0.71  |  |  |  |
| 120               | 0.81 | 0.86 | 0.78 | 0.82 | 0.76 | 0.77  | 0.70 | 0.74  | 0.80 | 0.71  | 0.76 | 0.74  | 0.79 | 0.79  | 0.86 | 0.82  |  |  |  |
| 125               | 0.93 | 0.95 | 0.91 | 0.92 | 0.89 | 0.86  | 0.82 | 0.85  | 0.92 | 0.82  | 0.88 | 0.85  | 0.92 | 0.88  | 0.95 | 0.94  |  |  |  |
| 130               | 1.02 | 1.03 | 1.00 | 1.04 | 1.00 | 0.97  | 0.92 | 0.94  | 1.01 | 0.92  | 0.97 | 0.96  | 1.01 | 0.97  | 1.04 | 1.04  |  |  |  |
| 135               | 1.08 | 1.11 | 1.07 | 1.11 | 1.09 | 1.05  | 1.00 | 1.01  | 1.10 | 1.02  | 1.07 | 1.06  | 1.09 | 1.08  | 1.13 | 1.10  |  |  |  |
| 140               | 1.14 | 1.17 | 1.15 | 1.18 | 1.15 | 1.12  | 1.08 | 1.10  | 1.18 | 1.12  | 1.16 | 1.14  | 1.18 | 1.17  | 1.19 | 1.17  |  |  |  |
| 145               | 1.21 | 1.23 | 1.19 | 1.24 | 1.22 | 1.19  | 1.15 | 1.18  | 1.25 | 1.19  | 1.21 | 1.23  | 1.26 | 1.24  | 1.28 | 1.26  |  |  |  |
| 150               | 1.24 | 1.28 | 1.25 | 1.31 | 1.28 | 1.26  | 1.22 | 1.30  | 1.33 | 1.29  | 1.30 | 1.32  | 1.32 | 1.32  | 1.33 | 1.31  |  |  |  |
| 155               | 1.31 | 1.33 | 1.31 | 1.38 | 1.36 | 1.33  | 1.31 | 1.33  | 1.38 | 1.32  | 1.37 | 1.36  | 1.36 | 1.34  | 1.38 | 1.36  |  |  |  |
| 160               | 1.36 | 1.38 | 1.40 | 1.43 | 1.43 | 1.40  | 1.42 | 1.42  | 1.42 | 1.40  | 1.41 | 1.41  | 1.41 | 1.39  | 1.41 | 1.39  |  |  |  |
| 165               | 1.42 | 1.42 | 1.43 | 1.51 | 1.49 | 1.48  | 1.49 | 1.48  | 1.50 | 1.46  | 1.46 | 1.50  | 1.50 | 1.48  | 1.50 | 1.48  |  |  |  |
| 170               | 1.49 | 1.52 | 1.52 | 1.57 | 1.55 | 1.55  | 1.54 | 1.58  | 1.61 | 1.59  | 1.58 | 1.55  | 1.55 | 1.55  | 1.57 | 1.52  |  |  |  |
| 175               | 1.58 | 1.61 | 1.61 | 1.60 | 1.58 | 1.61  | 1.63 | 1.64  | 1.65 | 1.66  | 1.63 | 1.60  | 1.61 | 1.59  | 1.62 | 1.57  |  |  |  |
| 180               | 1.67 | 1.68 | 1.64 | 1.66 | 1.62 | 1.61  | 1.67 | 1.65  | 1.68 | 1.67  | 1.65 | 1.66  | 1.63 | 1.65  | 1.67 | 1.62  |  |  |  |

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:18 January 2025

g Range: 0 - 180DEG

g Interval: 1.0DEG

Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.00.421

Humidity:65.0%

Test Distance:8.700m [K=1.0115]

Remarks: