

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1980.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-2.0 degrees horizontal

Beam Spread	At 10% of Imax	69.2V x 67.6H
	At 50% of Imax	36.3V x 38.4H
	At 90% of Imax	7.9V x 12.8H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	839.5 lumens per klm.
	To 50% of Imax	455.6 lumens per klm.
	To 90% of Imax	44.7 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

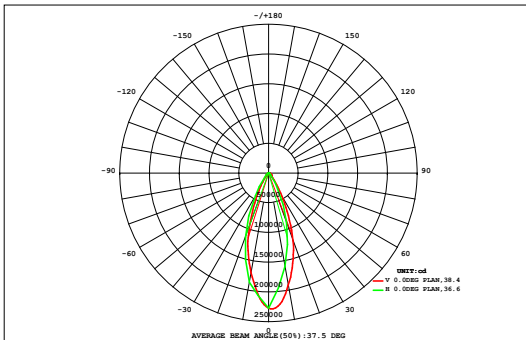

DATA OF LAMP		Eff:152.94lm/W	
MODEL	ASD-SPFL7-HV-A750D50-BA	Imax (cd)	228211
NOMINAL POWER (W)	750	AVAILABILITY (%)	84.6
RATED VOLTAGE (V)	277	Avai. FLUX (lm)	97501
NOMINAL FLUX (lm)	115224	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	115224
TEST VOLTAGE (V)	277	θ @50% (H,V)	38,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.06	0.85	3.19	7.33	13.4	20.9	26.1	29.9	32.8	33.0	30.4	26.6	22.1	14.5	8.27	3.77	1.09	0.11	274	0.00
70	0.15	1.89	6.72	15.5	27.9	43.6	56.9	61.2	66.3	66.6	61.5	57.1	45.6	28.7	16.6	7.47	2.19	0.22	566	0.00
60	0.28	3.11	11.0	25.3	45.1	73.1	109	109	115	115	108	112	76.0	45.9	26.3	11.8	3.46	0.36	990	0.00
50	0.41	4.39	15.3	34.9	63.2	107	183	195	220	225	202	193	109	64.4	36.1	16.1	4.84	0.50	1675	0.00
40	0.55	5.75	19.4	44.2	84.0	151	296	497	696	717	550	337	156	85.5	45.3	20.0	6.22	0.64	3711	1594
30	0.66	6.98	23.0	52.2	107	226	659	1466	2147	2176	1545	733	255	109	53.5	23.9	7.58	0.78	9592	8289
	0.75	8.07	26.5	60.7	128	370	1343	3029	4327	4351	3088	1406	410	129	61.5	27.4	8.64	0.88	18776	17701
	0.79	8.62	28.8	67.4	144	501	1844	4193	5973	6061	4224	1871	525	144	68.6	29.9	9.23	0.94	25694	24703
	0.78	8.62	28.8	67.4	146	513	1826	4032	5889	5815	3976	1753	496	139	66.9	29.1	9.00	0.91	24796	23807
	0.65	7.77	25.7	58.3	124	377	1240	2696	3667	3636	2636	1157	344	117	58.0	26.0	8.18	0.76	16181	15121
	0.51	6.50	22.2	50.3	102	228	607	1186	1680	1653	1089	519	182	95.8	49.6	22.2	6.81	0.55	7501	6104
-30	0.37	4.90	18.2	41.9	78.6	135	258	367	444	423	316	220	124	76.7	41.9	18.6	5.24	0.38	2573	183
-40	0.28	3.59	14.2	33.3	58.5	102	188	132	119	115	122	181	97.6	57.2	32.9	14.5	3.62	0.27	1275	0.00
-50	0.21	2.45	10.0	23.7	41.5	69.1	89.5	90.3	95.9	95.2	91.9	89.1	65.5	41.1	23.9	10.2	2.40	0.21	842	0.00
-60	0.19	1.67	6.45	15.0	26.2	40.4	47.1	54.3	59.3	59.1	54.2	47.5	38.6	25.7	14.7	6.14	1.53	0.17	498	0.00
-70	0.18	1.07	3.42	7.34	12.7	18.9	22.4	26.1	28.6	28.6	26.0	22.6	18.8	12.4	6.91	3.09	0.91	0.15	240	0.00
-80	0.10	0.42	0.95	1.59	2.46	3.17	3.42	4.07	4.57	4.37	3.75	3.36	2.67	1.57	0.95	0.49	0.20	0.06	38.2	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	6.93	76.6	264	606	1204	2980	8798	18169	25564	25575	18123	8728	2969	1188	612	271	81.1	7.89	15224	---
Φ a	0.00	0.00	0.00	0.00	0.00	829	6921	16714	24260	24307	16836	6829	804	0.00	0.00	0.00	0.00	0.00	---	97501

one-half-peak spread: U:16.3,D:20.3 , L:18.9,R:19.8


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

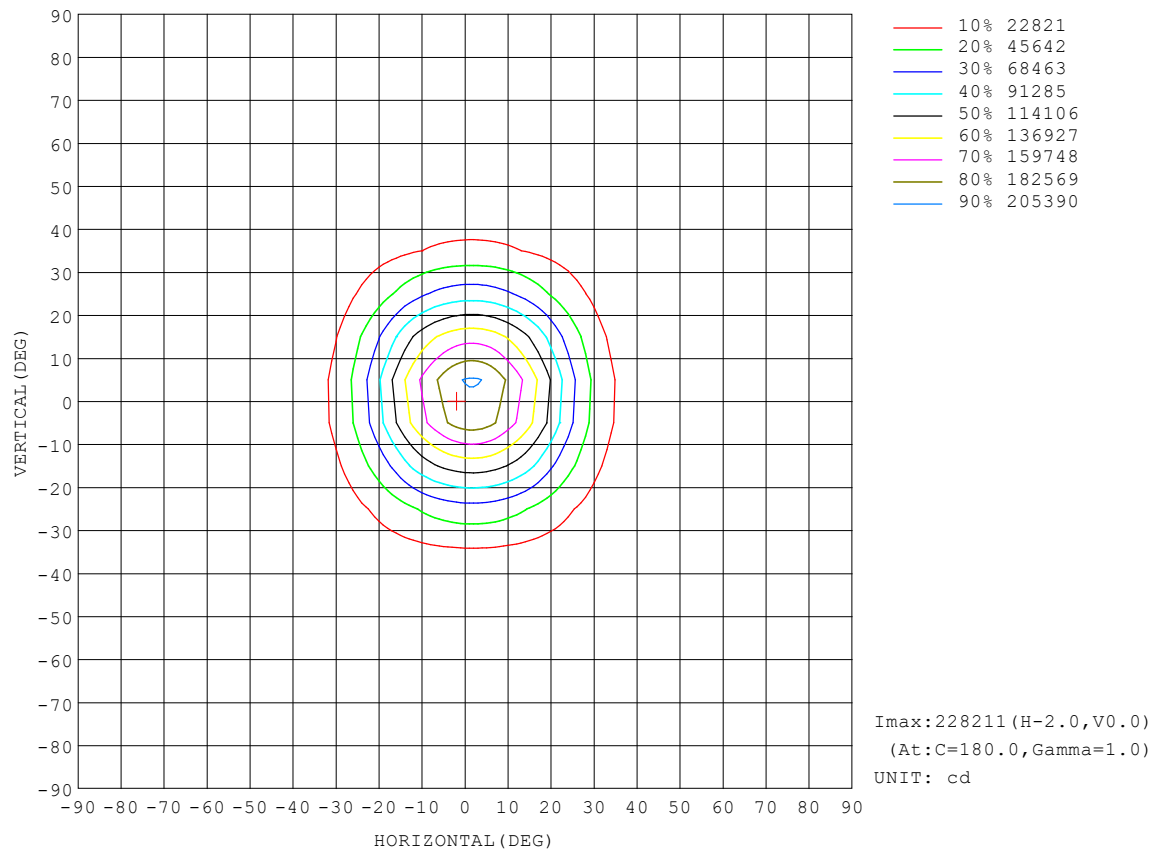


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

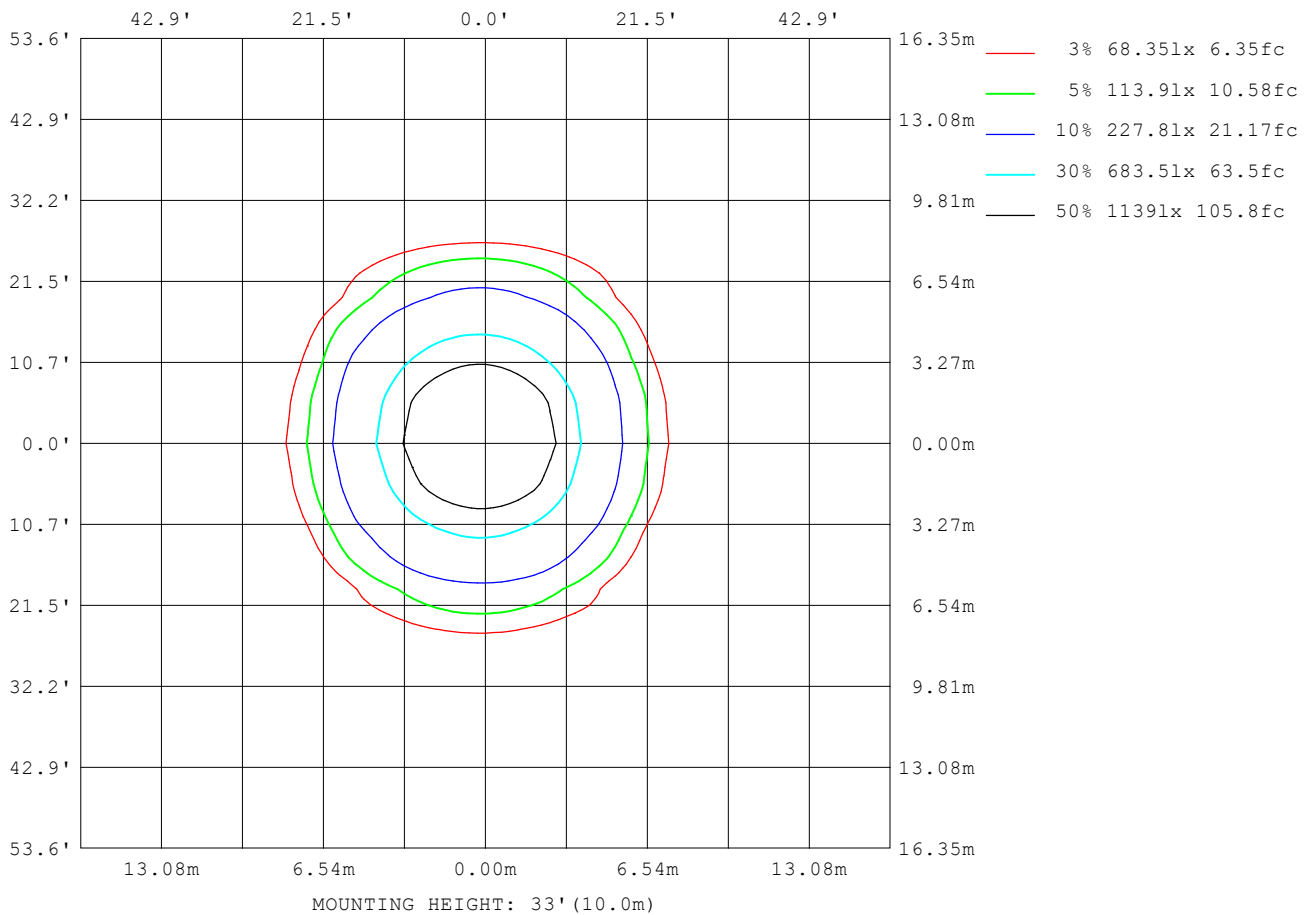

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

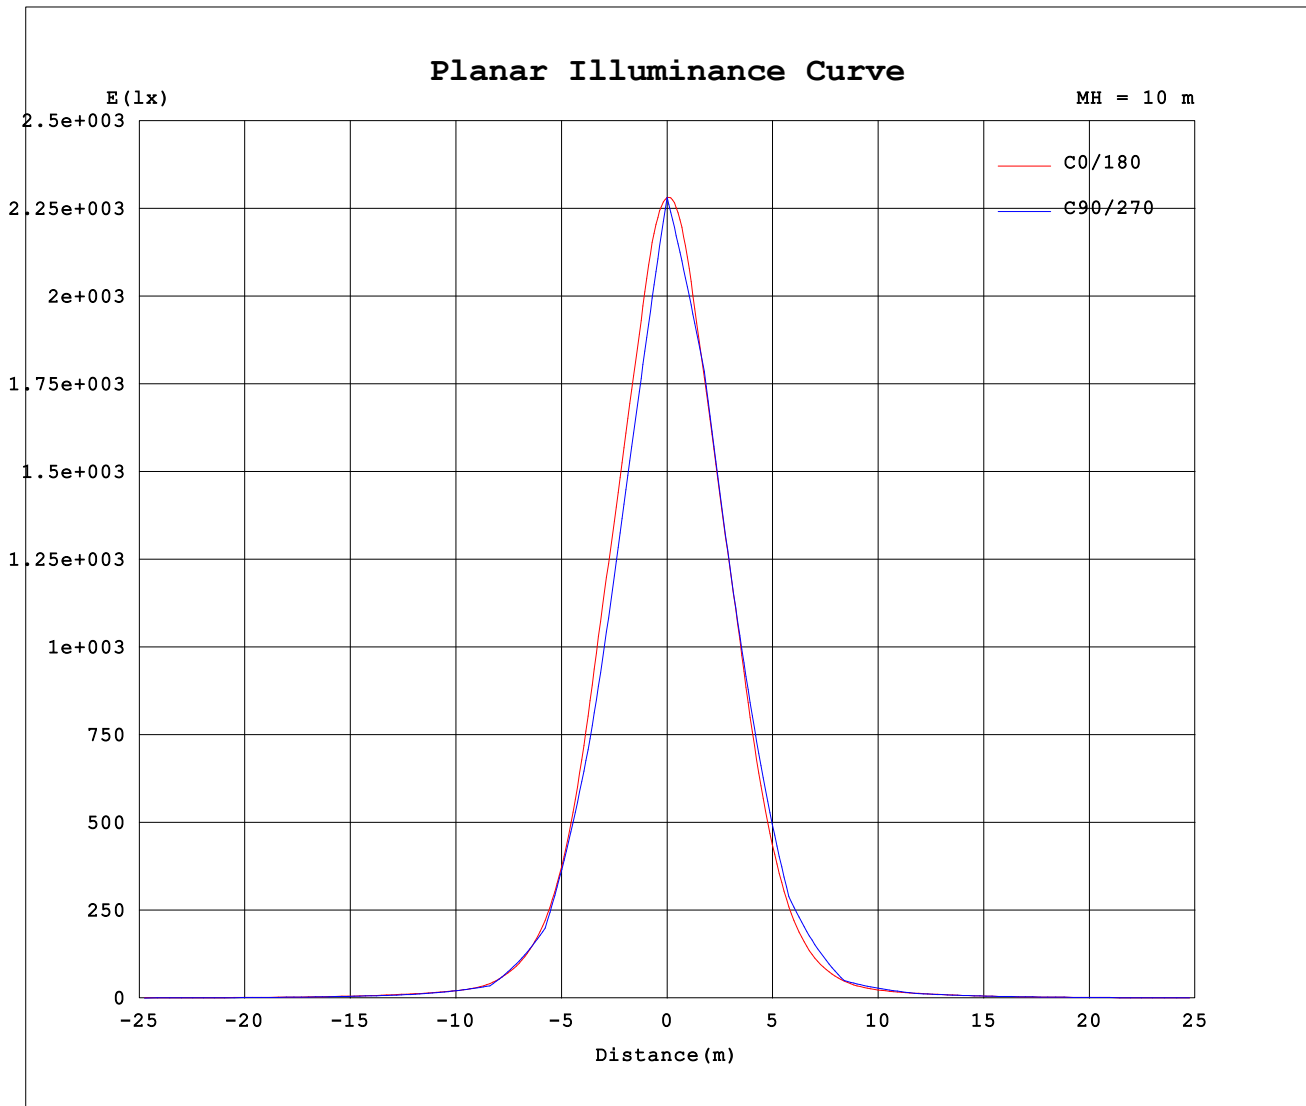


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

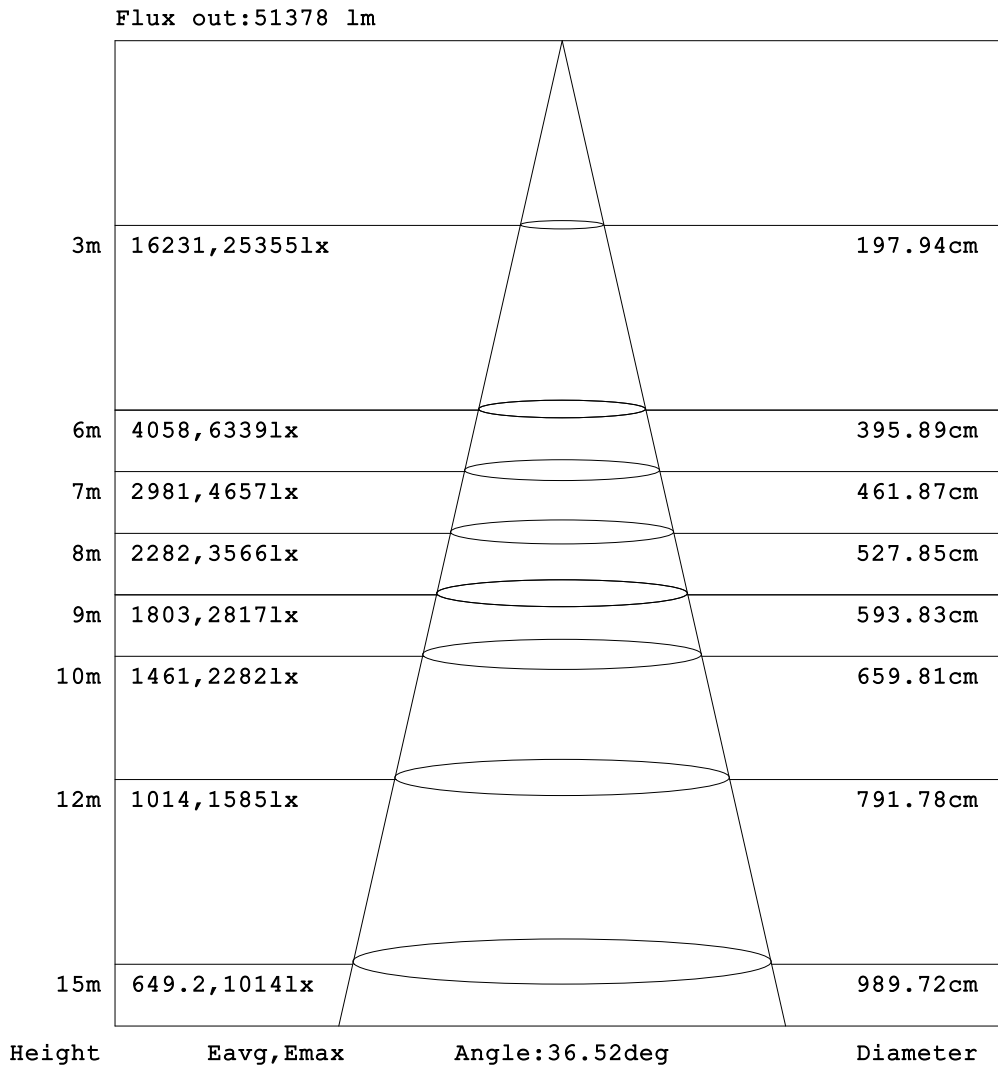

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

Table--1

UNIT: X100cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.44	0.66	0.83	1.05	1.39	1.77	2.14	2.52	2.92	3.39	3.93	4.20	4.37	4.46	4.63	4.87	5.06	5.25	5.33
-75	0.42	0.47	0.74	1.09	1.62	2.32	3.13	3.91	4.80	5.64	6.59	7.55	8.20	8.48	8.66	9.04	9.42	9.65	9.93
-70	0.35	0.59	1.05	1.72	2.66	3.85	5.04	6.35	7.69	8.94	10.5	11.7	12.5	12.6	13.1	13.7	14.1	14.4	14.6
-65	0.30	0.38	0.82	1.58	2.68	4.22	6.02	7.80	9.73	11.5	13.2	15.5	17.6	18.4	18.4	18.9	19.6	19.9	20.4
-60	0.25	0.61	1.44	2.66	4.45	6.75	9.15	11.5	14.0	16.1	18.7	21.9	24.2	24.0	24.3	25.0	25.5	26.1	26.3
-55	0.19	0.29	1.02	2.26	4.11	6.62	9.54	12.5	15.3	18.5	20.8	24.9	31.2	35.9	33.8	32.6	33.2	33.6	34.3
-50	0.16	0.71	1.96	3.90	6.64	9.96	13.6	16.8	20.5	23.8	27.2	35.3	45.4	46.1	41.2	40.9	41.5	42.1	42.2
-45	0.11	0.26	1.35	3.25	6.01	9.49	13.3	17.4	21.4	25.8	29.6	35.8	48.8	68.4	65.8	56.5	56.5	58.5	60.6
-40	0.12	0.94	2.81	5.71	9.42	13.6	17.9	22.7	27.7	32.3	38.3	49.5	76.7	94.8	75.7	71.0	74.1	77.8	78.4
-35	0.08	0.29	1.81	4.57	8.27	12.5	16.8	21.8	27.5	33.7	40.7	50.1	67.2	96.9	122	137	160	181	193
-30	0.10	1.20	3.82	7.71	12.1	16.7	21.5	27.6	34.7	42.9	53.8	67.6	91.2	133	184	230	274	303	307
-25	0.06	0.37	2.44	6.21	10.7	15.3	20.1	25.8	33.3	42.4	54.0	73.2	112	183	271	375	479	558	597
-20	0.11	1.57	5.30	10.0	14.7	19.7	25.3	32.6	42.4	54.6	74.9	119	206	339	481	647	788	870	889
-15	0.06	0.44	3.26	7.70	12.7	17.7	23.3	29.9	38.9	50.2	67.9	110	197	354	558	802	1029	1173	1242
-10	0.11	2.06	6.38	11.3	16.6	22.2	28.8	37.5	48.4	64.0	101	192	354	606	925	1255	1461	1574	1599
-5	0.05	0.61	3.93	8.55	13.9	19.5	26.0	33.8	44.3	56.6	80.3	146	278	513	840	1210	1533	1784	1934
0	0.12	2.67	6.81	12.1	17.8	24.3	32.1	42.3	54.1	72.0	123	238	456	793	1210	1574	1916	2213	2270
5	0.04	0.77	4.07	8.66	14.1	19.9	26.6	34.6	45.4	57.8	82.2	150	289	543	894	1290	1632	1900	2066
10	0.16	2.55	6.54	11.6	17.2	23.2	30.2	39.4	50.6	67.1	108	206	397	696	1059	1435	1678	1831	1865
15	0.02	0.78	3.88	8.16	13.2	18.5	24.4	31.4	41.1	52.9	72.5	119	221	423	675	975	1242	1416	1506
20	0.16	2.44	6.10	10.6	15.5	20.7	26.5	34.4	45.1	58.8	82.2	136	261	437	644	860	1034	1133	1147
25	0.02	0.69	3.49	7.19	11.5	16.2	21.2	27.2	35.4	45.6	59.4	81.8	131	235	359	508	649	750	797
30	0.14	2.06	5.12	8.83	13.0	17.6	22.6	29.2	37.5	47.3	59.8	77.7	110	174	250	331	399	437	444
35	0.03	0.55	2.93	5.92	9.43	13.5	17.9	23.1	29.6	36.9	45.3	56.3	73.9	107	146	186	228	262	278
40	0.13	1.72	4.18	7.09	10.6	14.6	19.0	24.5	30.3	36.0	43.1	53.2	72.2	88.5	87.4	92.4	102	109	112
45	0.04	0.40	2.29	4.57	7.31	10.7	14.3	18.6	23.4	28.4	33.0	39.5	51.5	68.7	70.8	68.2	72.1	77.2	80.3
50	0.11	1.23	3.05	5.19	7.89	11.1	14.7	18.3	22.5	26.2	29.8	38.3	52.1	56.3	49.1	47.8	48.5	49.3	49.6
55	0.06	0.26	1.61	3.24	5.20	7.67	10.5	13.6	16.8	20.3	23.0	27.3	35.4	42.6	40.4	37.6	38.1	38.8	39.4
60	0.09	0.80	2.07	3.53	5.36	7.61	10.1	12.5	15.4	17.8	20.5	25.3	29.2	27.9	27.1	27.8	28.4	29.1	29.3
65	0.07	0.18	0.96	2.02	3.25	4.80	6.60	8.47	10.6	12.7	14.5	17.3	20.4	21.7	20.6	21.0	21.7	22.1	22.6
70	0.08	0.31	1.10	1.93	2.92	4.13	5.38	6.85	8.45	9.78	11.6	13.0	14.0	14.0	14.4	15.1	15.5	15.8	16.0
75	0.08	0.12	0.41	0.91	1.54	2.28	3.10	3.98	5.00	6.00	7.06	8.22	9.09	9.41	9.51	9.97	10.4	10.6	10.9
80	0.08	0.14	0.28	0.64	1.02	1.42	1.84	2.31	2.83	3.41	4.06	4.47	4.72	4.86	5.10	5.40	5.56	5.71	5.75
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.48V I:2.7461A P:753.40W PF:0.9887 Freq:50.03Hz		
Lamp Flux:115224x1 lm		
NAME: ASD-SPFL7-HV-A750D50-BA	TYPE: SPFL7HV-BA	
SPEC.: 750W 40D		
MFR.: ASD LIGHTING CORP		

Table--2

UNIT: X100cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	5.21	5.03	4.80	4.57	4.53	4.40	4.27	3.60	3.05	2.62	2.21	1.82	1.42	1.05	0.75	0.63	0.44	0.28	
-75	9.87	9.61	9.33	8.90	8.59	8.57	8.19	7.45	6.25	5.34	4.48	3.60	2.82	1.99	1.32	0.87	0.57	0.34	
-70	14.2	13.9	13.3	12.8	12.6	12.4	11.4	9.80	8.32	7.04	5.65	4.46	3.19	2.09	1.29	0.73	0.43	0.25	
-65	20.2	19.8	19.3	18.7	18.4	18.6	17.0	14.7	12.6	10.9	9.10	7.25	5.46	3.63	2.24	1.27	0.62	0.30	
-60	25.6	25.1	24.4	24.0	24.5	23.3	19.9	16.9	14.9	12.7	10.3	7.95	5.48	3.39	1.93	0.95	0.36	0.20	
-55	34.0	33.3	32.8	32.7	35.5	35.2	28.7	23.0	20.0	17.4	14.5	11.8	8.73	5.84	3.48	1.81	0.75	0.24	
-50	41.5	40.9	40.7	44.1	48.4	39.7	30.1	25.0	22.3	18.5	15.5	12.0	8.46	5.30	2.86	1.27	0.34	0.14	
-45	59.4	56.9	55.0	58.6	72.7	61.4	41.7	32.7	28.1	24.2	20.1	16.1	12.2	8.52	5.20	2.57	0.95	0.22	
-40	74.0	70.2	71.2	90.3	91.1	56.7	40.9	34.2	29.5	24.9	20.0	15.5	11.5	7.64	4.16	1.70	0.40	0.15	
-35	191	175	152	131	116	82.6	56.6	45.1	37.6	31.5	25.5	19.9	15.5	11.3	7.36	3.76	1.25	0.27	
-30	291	254	205	157	103	73.0	56.6	46.7	38.1	31.0	24.2	18.9	14.4	10.2	6.11	2.43	0.57	0.25	
-25	590	535	444	334	236	146	88.7	61.1	47.6	38.4	30.3	23.6	18.5	13.8	9.50	5.24	1.71	0.40	
-20	834	715	552	389	261	142	81.5	57.7	45.7	35.9	27.9	21.9	16.9	12.2	7.71	3.43	0.77	0.42	
-15	1227	1132	961	712	476	281	155	85.6	57.1	44.8	35.1	27.3	21.4	16.1	11.2	6.52	2.40	0.55	
-10	1524	1362	1076	739	449	254	133	72.6	52.4	41.7	32.3	25.3	19.5	14.1	8.97	4.42	1.02	0.58	
-5	1896	1688	1414	1069	693	400	216	113	65.2	50.4	40.0	30.8	23.7	17.8	12.3	7.21	3.01	0.64	
0	2046	1703	1350	935	557	301	159	82.4	57.3	46.6	35.9	27.6	20.7	14.8	9.35	4.67	1.23	0.61	
5	2026	1792	1491	1128	730	418	225	117	67.3	51.5	41.1	31.6	24.2	18.1	12.5	7.31	3.18	0.63	
10	1756	1536	1216	832	497	275	145	77.9	55.0	44.1	34.2	26.6	20.2	14.6	9.24	4.61	1.31	0.49	
15	1483	1348	1131	840	553	323	176	95.2	61.4	47.2	37.2	28.8	22.4	16.9	11.7	6.89	2.96	0.52	
20	1070	918	712	492	324	173	97.0	64.4	48.6	38.0	29.4	23.2	17.9	13.0	8.27	4.13	1.08	0.30	
25	782	707	584	437	298	184	108	69.9	51.9	40.9	32.0	24.9	19.6	14.7	10.3	6.06	2.59	0.37	
30	417	359	284	208	137	90.5	65.4	51.6	41.3	32.9	25.5	20.0	15.3	11.0	7.09	3.58	0.84	0.14	
35	274	251	212	171	135	94.0	65.4	50.7	41.2	33.8	27.1	21.1	16.5	12.2	8.41	5.02	2.14	0.25	
40	108	98.2	90.5	89.6	82.6	58.7	45.6	37.9	32.1	26.7	21.2	16.4	12.5	8.71	5.56	2.84	0.59	0.07	
45	79.9	76.3	71.3	69.4	73.6	62.6	45.3	36.1	30.9	26.3	21.5	17.1	13.2	9.60	6.47	3.87	1.64	0.18	
50	48.8	47.9	48.3	54.3	56.8	43.6	32.3	27.5	24.4	20.1	16.6	12.9	9.57	6.58	4.16	2.15	0.41	0.05	
55	39.1	38.4	37.8	38.3	43.1	40.9	31.6	25.1	22.1	19.1	15.6	12.7	9.69	6.94	4.62	2.77	1.15	0.14	
60	28.6	28.0	27.2	27.4	30.1	26.8	22.0	18.5	16.6	13.8	11.3	8.85	6.45	4.38	2.76	1.41	0.25	0.06	
65	22.5	22.0	21.5	20.8	21.4	21.8	19.2	16.0	13.9	12.1	9.90	8.04	6.13	4.35	2.90	1.73	0.65	0.11	
70	15.7	15.4	14.8	14.2	14.2	13.9	12.4	10.6	9.11	7.78	6.26	4.94	3.63	2.49	1.57	0.75	0.18	0.08	
75	10.8	10.6	10.3	9.86	9.55	9.52	8.99	7.96	6.74	5.81	4.79	3.85	2.98	2.13	1.41	0.78	0.28	0.09	
80	5.62	5.50	5.27	5.01	4.89	4.75	4.39	3.83	3.18	2.66	2.17	1.72	1.27	0.87	0.47	0.22	0.11	0.08	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:S
Test Date:2026-1-5

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

50% Beam Angle : 38°-H X 36°-V

one-half-peak spread: U:16.3,D:20.3 , L:18.9,R:19.8

TOTAL FLUX : 115224 lm

LOR : 100.0%

AVAILABILITY FLUX : 97501 lm

AVAILABILITY : 84.6%

