


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:277.10V I:0.2571A P:70.891W PF:0.9951 Freq:60.01Hz Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: ASD Lighting Corp		

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 129.41 lm/W
MODEL		I _{max} (cd)	2678	S/MH(C0/180)	1.36	
NOMINAL POWER(W)	70	LOR(%)	100.0	S/MH(C90/270)	1.30	
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	9174.2	η UP,DN(C0-180)	0.0,49.8	
NOMINAL FLUX(lm)	9174.18	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.1	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	277	η down(%)	99.9	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

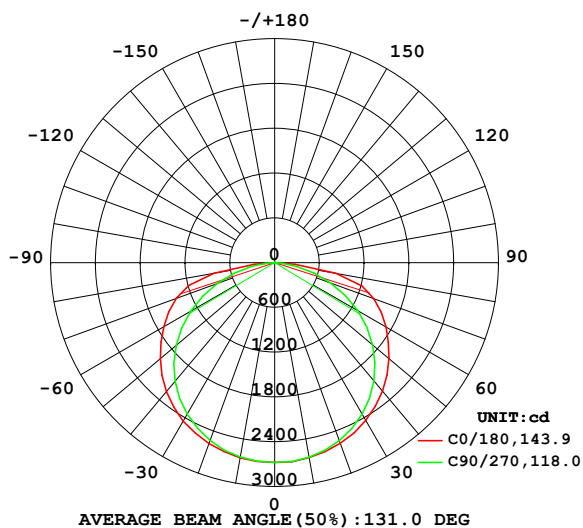

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

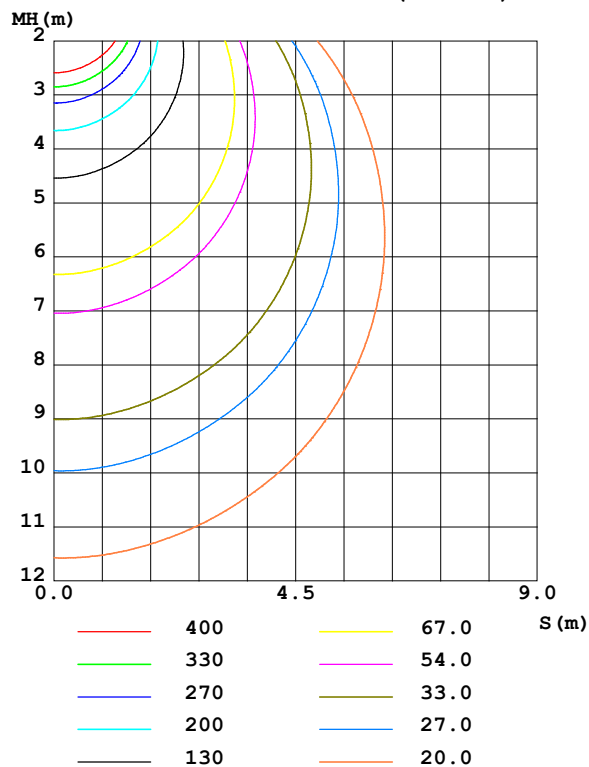

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity: 65.0%
Test Distance: 26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2654	2646	2646	2653	2655	2648	2642	2646	0- 10	254.3	254.3	2.77,2.77
20	2573	2551	2536	2556	2578	2554	2532	2557	10- 20	737.5	991.8	10.8,10.8
30	2443	2390	2342	2401	2453	2390	2345	2403	20- 30	1146	2138	23.3,23.3
40	2247	2146	2069	2171	2257	2157	2074	2175	30- 40	1432	3570	38.9,38.9
50	2000	1830	1717	1877	2003	1852	1720	1883	40- 50	1558	5128	55.9,55.9
60	1725	1463	1292	1522	1714	1491	1297	1535	50- 60	1509	6638	72.4,72.4
70	1417	1077	797.6	1141	1402	1095	811.9	1164	60- 70	1300	7937	86.5,86.5
80	834.1	654.3	302.1	683.5	822.7	662.5	318.2	713.5	70- 80	932.1	8869	96.7,96.7
90	2.081	1.687	0.7629	1.668	0.6837	0.8940	0.9147	0.8838	80- 90	298.2	9168	99.9,99.9
100	1.521	1.227	0.6107	1.366	0.6082	0.6137	0.4577	0.4553	90-100	1.023	9169	99.9,99.9
110	1.521	1.227	0.9161	1.366	0.6082	0.6137	0.8396	0.4553	100-110	0.9548	9170	100,100
120	1.521	1.227	0.9161	1.366	0.6082	0.6137	0.8398	0.4553	110-120	0.9364	9171	100,100
130	1.521	1.227	0.9161	1.366	0.7613	0.6137	1.069	0.5310	120-130	0.8716	9171	100,100
140	1.521	1.151	0.9161	1.366	0.9123	0.6904	1.145	0.9103	130-140	0.7998	9172	100,100
150	1.444	1.151	0.9923	1.366	1.217	1.150	1.451	1.517	140-150	0.7429	9173	100,100
160	1.444	1.151	1.145	1.366	1.370	1.381	1.603	1.593	150-160	0.6185	9174	100,100
170	1.595	1.381	1.527	1.746	1.977	1.918	1.756	1.593	160-170	0.4273	9174	100,100
180	2.052	1.611	1.603	1.974	1.977	1.841	1.527	1.593	170-180	0.1638	9174	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2025-02-28

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
 Humidity:65.0%
 Test Distance:26.000m [K=1.2600]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz		
Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

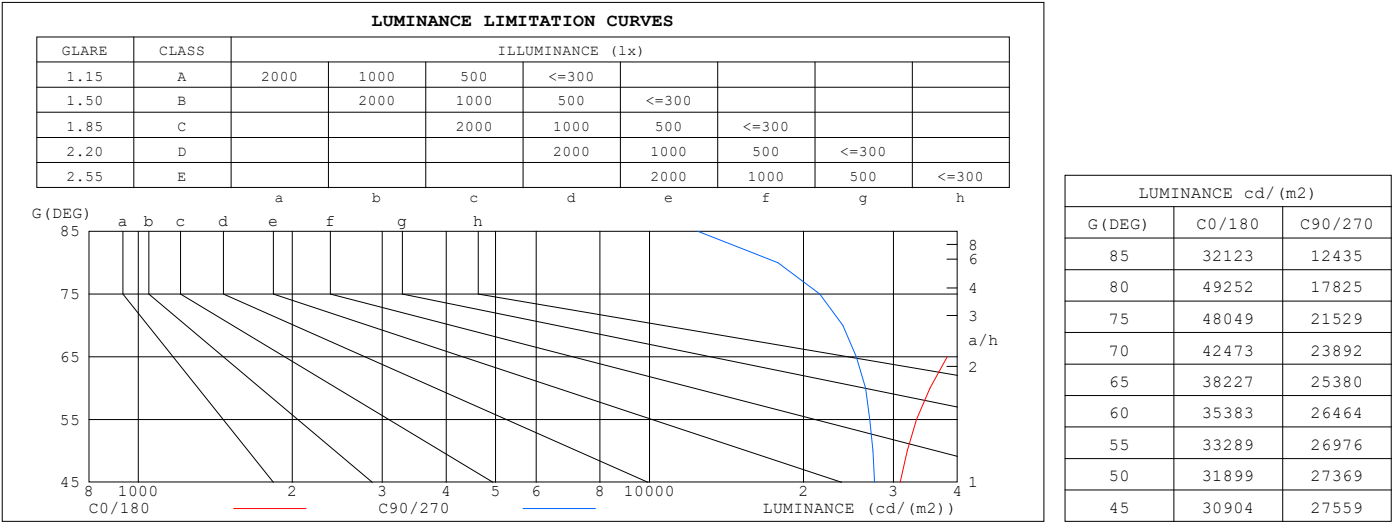

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28


γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz		
Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.02	.97	.93	.00	.95	.91	.95	.92	.88	.91	.88	.86	.88	.85	.83	.81														
2.0	.88	.80	.74	.86	.79	.73	.82	.76	.71	.79	.74	.69	.76	.71	.68	.66														
3.0	.76	.67	.60	.75	.66	.60	.71	.64	.59	.69	.63	.57	.66	.61	.56	.54														
4.0	.67	.58	.50	.66	.57	.50	.63	.55	.49	.61	.54	.49	.58	.53	.48	.46														
5.0	.59	.50	.43	.58	.49	.43	.56	.48	.42	.54	.47	.42	.52	.46	.41	.39														
6.0	.53	.44	.37	.52	.43	.37	.50	.42	.37	.49	.42	.36	.47	.41	.36	.34														
7.0	.48	.39	.33	.47	.39	.32	.46	.38	.32	.44	.37	.32	.43	.36	.32	.30														
8.0	.44	.35	.29	.43	.35	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.26														
9.0	.40	.32	.26	.40	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.23														
10.0	.37	.29	.23	.36	.29	.23	.35	.28	.23	.34	.28	.23	.33	.27	.23	.21														

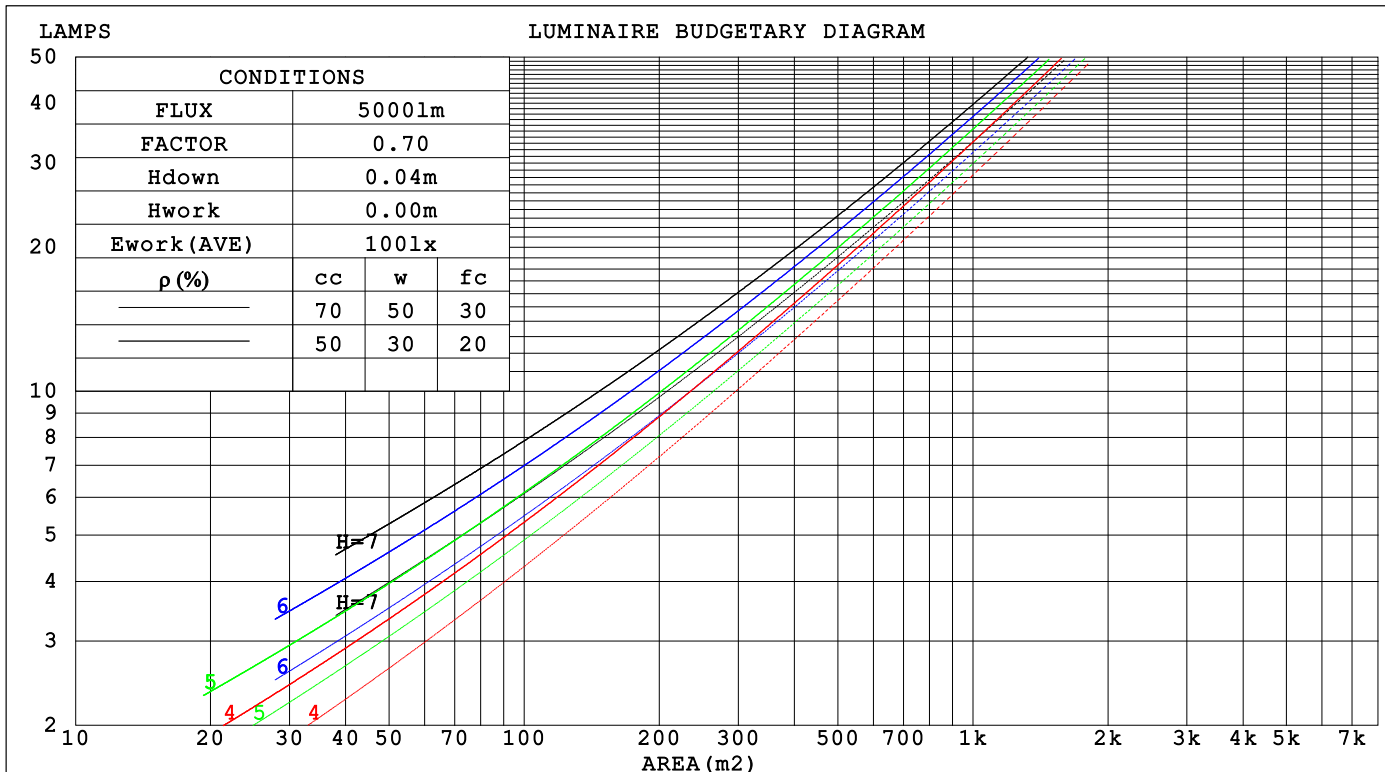

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz		
Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.347	.197	.062	.339	.194	.061	.326	.187	.060	.313	.181	.058	.302	.175	.056		
2.0	.319	.175	.054	.312	.172	.053	.300	.167	.052	.289	.162	.051	.279	.158	.050		
3.0	.291	.155	.046	.285	.153	.046	.274	.149	.045	.264	.145	.044	.255	.141	.044		
4.0	.265	.138	.040	.260	.136	.040	.251	.133	.040	.242	.130	.039	.234	.127	.039		
5.0	.243	.124	.036	.239	.122	.036	.230	.120	.035	.222	.117	.035	.215	.115	.035		
6.0	.224	.112	.032	.220	.111	.032	.212	.109	.032	.205	.107	.031	.199	.105	.031		
7.0	.207	.102	.029	.204	.101	.029	.197	.100	.029	.191	.098	.028	.185	.096	.028		
8.0	.193	.094	.026	.189	.093	.026	.184	.092	.026	.178	.090	.026	.173	.089	.026		
9.0	.180	.087	.024	.177	.086	.024	.172	.085	.024	.167	.084	.024	.162	.082	.024		
10.0	.169	.081	.022	.166	.080	.022	.161	.079	.022	.157	.078	.022	.152	.077	.022		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.183	.156	.132	.157	.134	.114	.107	.092	.079	.062	.053	.046	.020	.017	.015		
2.0	.176	.132	.095	.151	.114	.082	.104	.079	.057	.060	.046	.034	.019	.015	.011		
3.0	.169	.115	.072	.145	.099	.062	.099	.069	.044	.057	.040	.026	.018	.013	.008		
4.0	.161	.102	.056	.138	.088	.049	.095	.061	.035	.055	.036	.020	.018	.012	.007		
5.0	.154	.092	.046	.132	.079	.040	.091	.055	.028	.053	.033	.017	.017	.011	.006		
6.0	.146	.083	.038	.126	.072	.033	.087	.051	.024	.050	.030	.014	.016	.010	.005		
7.0	.139	.077	.033	.120	.066	.028	.083	.046	.020	.048	.027	.012	.016	.009	.004		
8.0	.132	.071	.028	.114	.061	.025	.079	.043	.018	.046	.025	.010	.015	.008	.003		
9.0	.126	.066	.025	.109	.057	.022	.075	.040	.016	.044	.024	.009	.014	.008	.003		
10.0	.120	.061	.022	.104	.053	.020	.072	.038	.014	.042	.022	.008	.014	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz										
Lamp Flux:9174.18x1 lm										
NAME: ASD-LTR-24A70-2P-6500K										
MFR.: EVERFINE										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	19.2	17.9	19.4	19.6	16.6	18.2	16.9	18.4	18.6
3H	20.1	21.6	20.4	21.8	22.1	18.2	19.7	18.5	19.9	20.2
4H	21.4	22.8	21.7	23.1	23.4	18.8	20.2	19.1	20.5	20.7
6H	22.4	23.8	22.8	24.1	24.4	19.2	20.5	19.5	20.8	21.1
8H	22.6	23.9	22.9	24.2	24.5	19.2	20.5	19.6	20.8	21.1
12H	22.7	23.9	23.0	24.2	24.5	19.2	20.5	19.6	20.8	21.1
4H 2H	18.2	19.6	18.5	19.9	20.2	17.4	18.9	17.8	19.1	19.4
3H	20.9	22.2	21.3	22.5	22.8	19.3	20.5	19.6	20.8	21.2
4H	22.4	23.6	22.8	23.9	24.2	20.1	21.3	20.5	21.6	21.9
6H	23.6	24.6	24.0	25.0	25.3	20.6	21.7	21.1	22.0	22.4
8H	23.8	24.7	24.2	25.1	25.5	20.7	21.7	21.2	22.1	22.5
12H	23.9	24.8	24.3	25.2	25.6	20.8	21.7	21.2	22.1	22.5
8H 4H	22.8	23.7	23.2	24.1	24.5	20.8	21.8	21.2	22.2	22.6
6H	24.0	24.8	24.5	25.2	25.7	21.6	22.4	22.0	22.8	23.2
8H	24.3	25.0	24.8	25.5	25.9	21.7	22.4	22.2	22.9	23.3
12H	24.5	25.1	25.0	25.6	26.1	21.8	22.5	22.3	22.9	23.4
12H 4H	22.8	23.6	23.2	24.0	24.4	20.9	21.8	21.4	22.2	22.6
6H	24.1	24.8	24.5	25.2	25.7	21.7	22.4	22.2	22.9	23.3
8H	24.4	25.0	24.9	25.5	25.9	22.0	22.6	22.4	23.0	23.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.5				

CIE Pub.117, 9174 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 7.7)
Area: 0.09751 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz		
Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	54	42	35	53	42	35	28
0.80	64	52	44	63	52	44	61	51	44	36
1.00	73	61	53	71	60	53	69	62	52	44
1.25	80	68	61	78	68	60	75	66	59	52
1.50	85	74	66	83	73	66	80	71	65	57
2.00	92	83	76	90	82	75	87	79	73	65
2.50	96	88	81	94	86	80	90	84	78	70
3.00	100	92	86	98	91	85	94	88	83	74
4.00	104	98	93	102	96	92	98	93	89	80
5.00	107	102	97	105	100	96	100	96	93	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2025-02-28

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.464
 Humidity: 65.0%
 Test Distance: 26.000m [K=1.2600]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

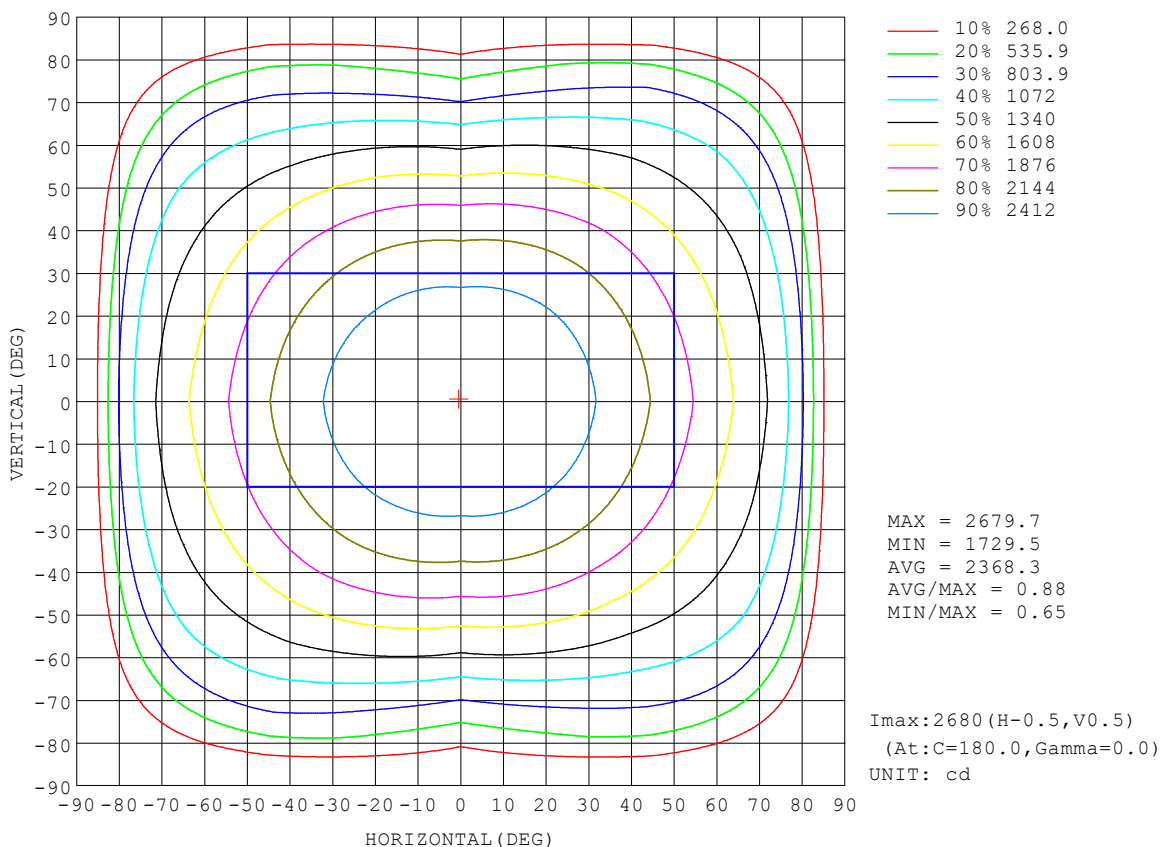


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

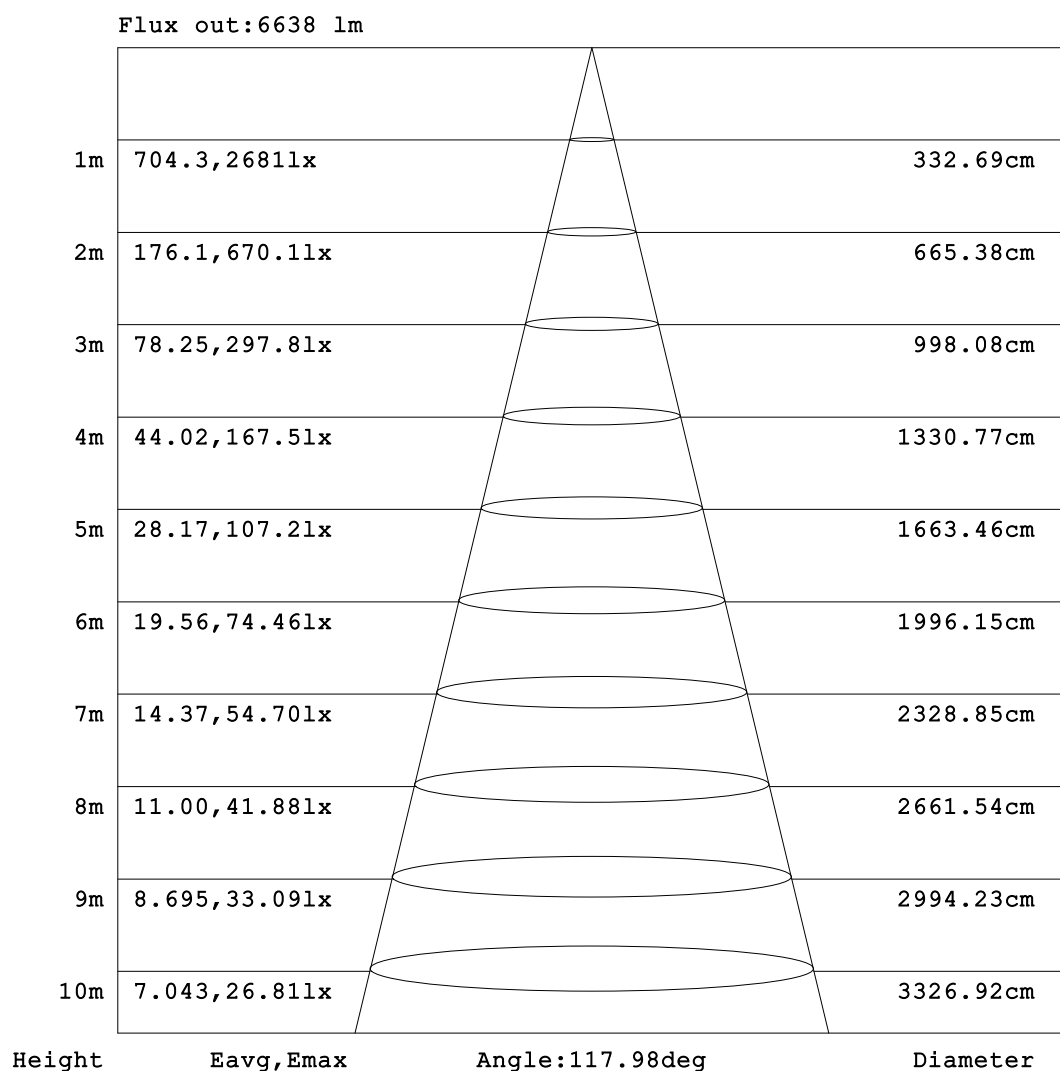

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

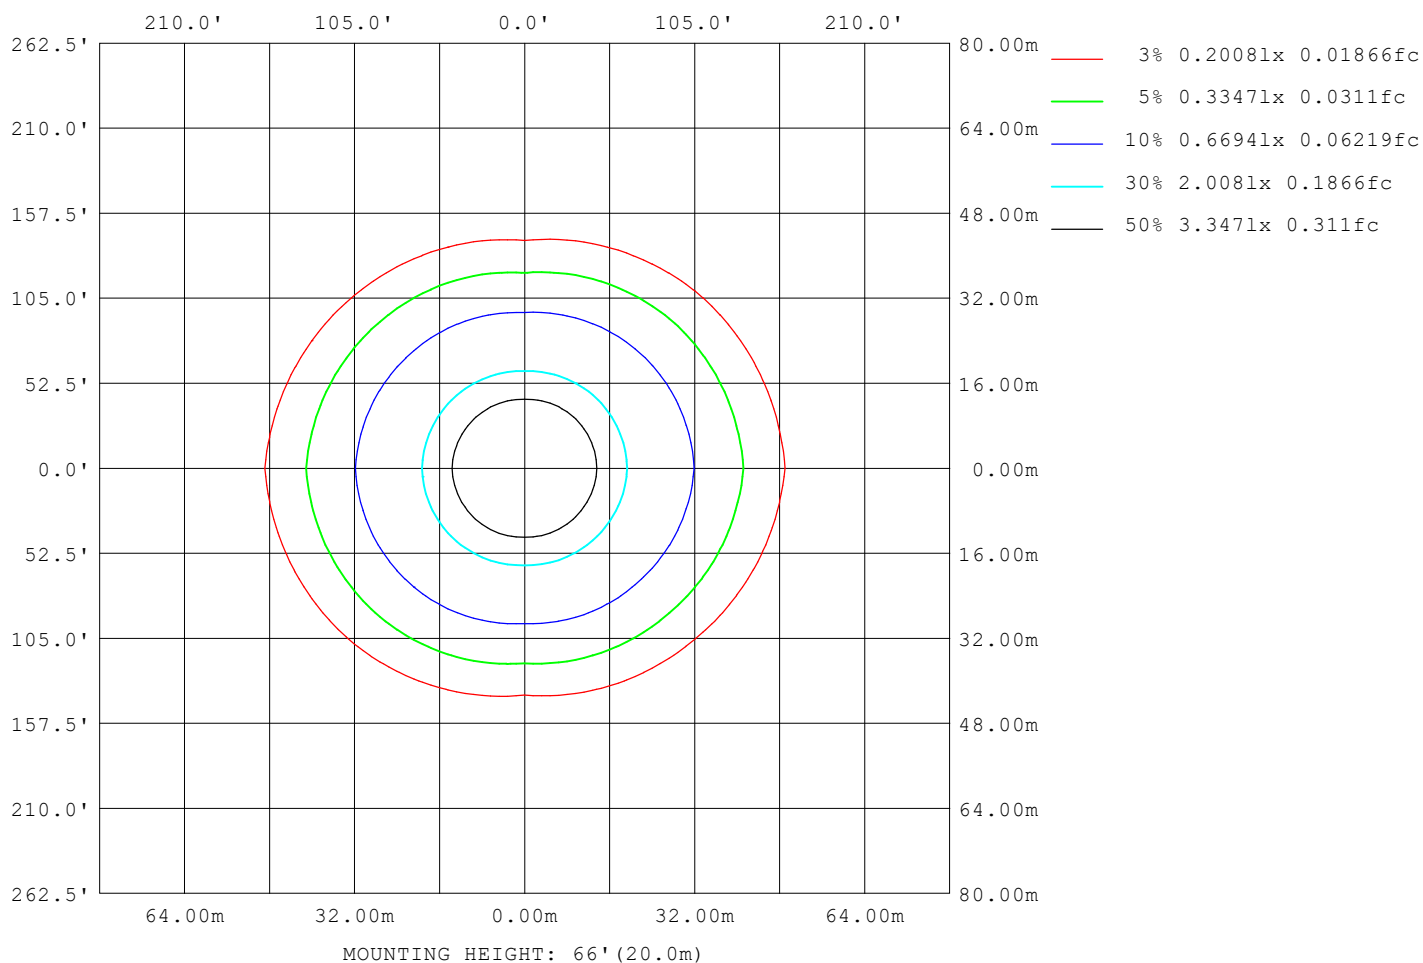

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		


AvgL	cd/m2
L_0~180 (65) av	38143
L_0~180 (75) av	47596
L_0~180 (85) av	32181
L_90~270 (65) av	25599
L_90~270 (75) av	21864
L_90~270 (85) av	13139
L_45 (65) av	31891
L_45 (75) av	36313
L_45 (85) av	32675

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks:

Planar Illuminance Curve

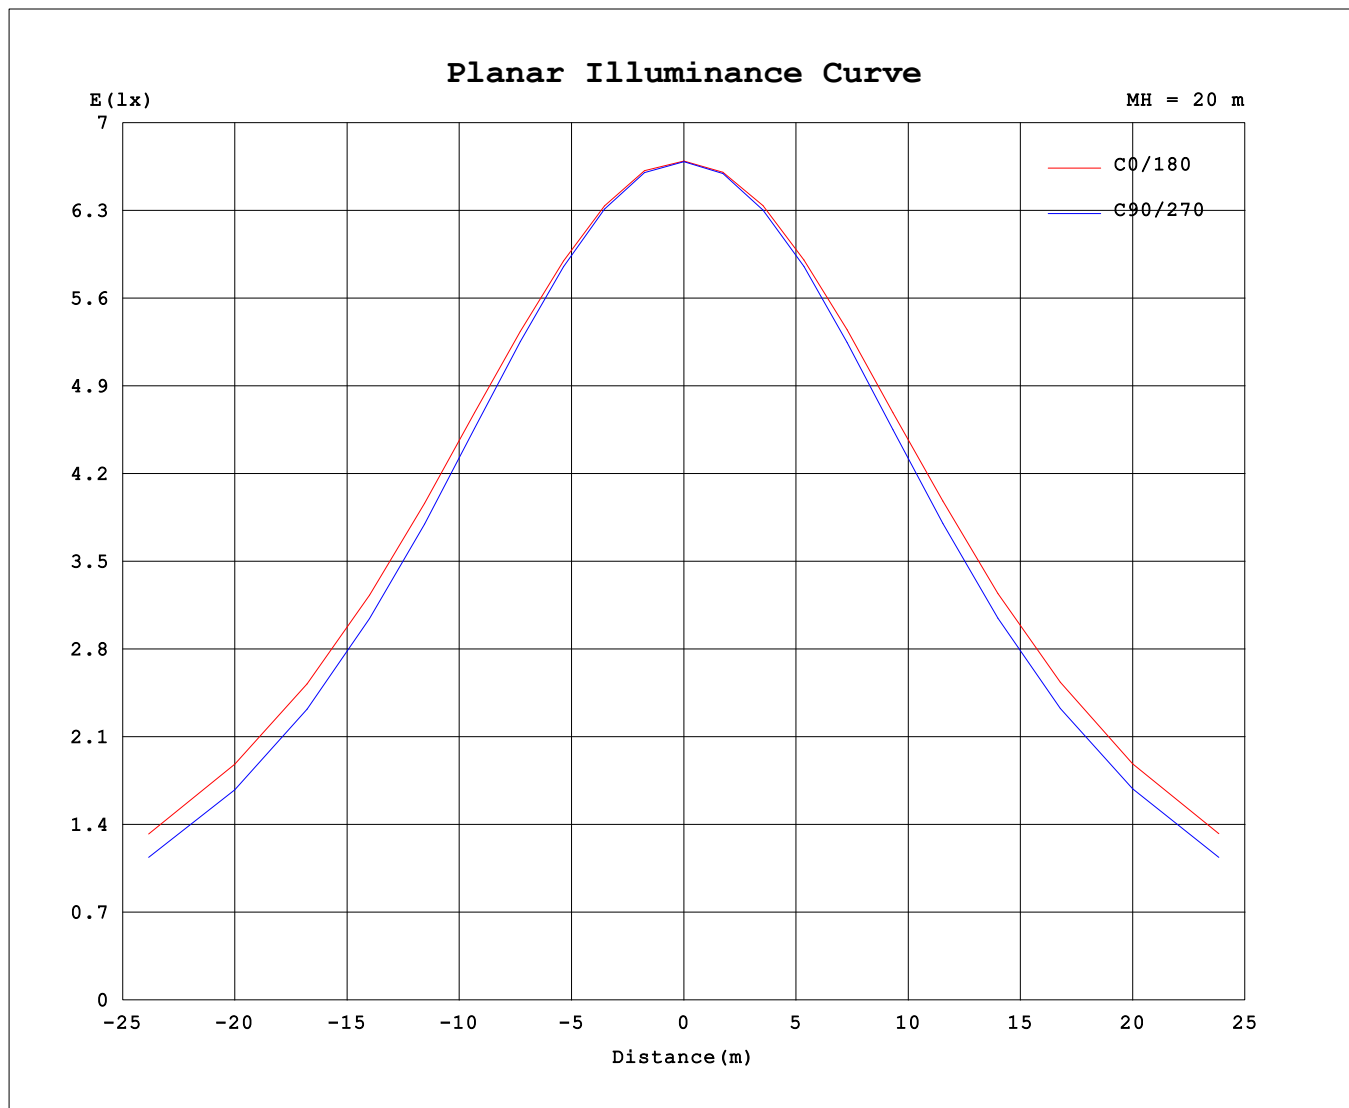

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2025-02-28

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity: 65.0%
Test Distance: 26.000m [K=1.2600]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.10V I:0.2679A P:72.480W PF:0.9951 Freq:60.01Hz		
Lamp Flux:9174.18x1 lm		
NAME: ASD-LTR-24A70-2P-6500K		
MFR.: EVERFINE		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2678	2678	2678	2678	2678	2678	2678	2678										
5	2678	2662	2674	2676	2673	2673	2671	2671										
10	2654	2646	2646	2653	2655	2648	2642	2646										
15	2618	2604	2600	2611	2622	2605	2602	2612										
20	2573	2551	2536	2556	2578	2554	2532	2557										
25	2519	2485	2454	2485	2519	2485	2448	2489										
30	2443	2390	2342	2401	2453	2390	2345	2403										
35	2352	2274	2219	2293	2361	2284	2220	2300										
40	2247	2146	2069	2171	2257	2157	2074	2175										
45	2131	1995	1902	2028	2135	2015	1911	2036										
50	2000	1830	1717	1877	2003	1852	1720	1883										
55	1862	1652	1510	1706	1858	1680	1521	1712										
60	1725	1463	1292	1522	1714	1491	1297	1535										
65	1576	1272	1047	1335	1568	1297	1063	1352										
70	1417	1077	798	1141	1402	1095	812	1164										
75	1213	879	544	941	1190	886	560	960										
80	834	654	302	683	823	662	318	713										
85	273	270	106	262	274	291	118	287										
90	2.08	1.69	0.76	1.67	0.68	0.89	0.91	0.88										
95	1.52	1.30	0.61	1.44	0.61	0.54	0.30	0.46										
100	1.52	1.23	0.61	1.37	0.61	0.61	0.46	0.46										
105	1.52	1.23	0.69	1.37	0.61	0.61	0.76	0.46										
110	1.52	1.23	0.92	1.37	0.61	0.61	0.84	0.46										
115	1.52	1.23	0.92	1.37	0.61	0.61	0.84	0.46										
120	1.52	1.23	0.92	1.37	0.61	0.61	0.84	0.46										
125	1.52	1.23	0.92	1.37	0.61	0.61	1.07	0.46										
130	1.52	1.23	0.92	1.37	0.76	0.61	1.07	0.53										
135	1.52	1.15	0.92	1.37	0.84	0.61	1.07	0.76										
140	1.52	1.15	0.92	1.37	0.91	0.69	1.14	0.91										
145	1.44	1.15	0.92	1.37	1.14	1.00	1.30	1.21										
150	1.44	1.15	0.99	1.37	1.22	1.15	1.45	1.52										
155	1.44	1.15	1.15	1.37	1.29	1.23	1.53	1.59										
160	1.44	1.15	1.15	1.37	1.37	1.38	1.60	1.59										
165	1.44	1.23	1.37	1.37	1.67	1.61	1.76	1.59										
170	1.60	1.38	1.53	1.75	1.98	1.92	1.76	1.59										
175	1.75	1.46	1.60	1.82	1.98	1.92	1.68	1.59										
180	2.05	1.61	1.60	1.97	1.98	1.84	1.53	1.59										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2025-02-28

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.464
Humidity:65.0%
Test Distance:26.000m [K=1.2600]
Remarks: