



FLOOR LAMP WITH SHELVES

FLS series

► **DESIGN** - FLOOR LAMP WITH SHELVES features a modern, functional design with a sturdy steel frame and a stylish fabric lampshade. Provides soft, diffused lighting while adding storage and display space to your interior.

► **VARIETY** - The fixture comes in 58-inch, 62-inch and 70-inch sizes, with square or triangular shelves, available with White or Natural lampshade finishes to suit any design preference.

► **BULB INCLUDED** - The fixture includes a standard E26 medium base which is compatible with LED bulbs less than 60W. Each floor lamp comes with a LED-A19 bulb with 3CCT selection, ready for installation.

► **COLOR SELECTABLE** - You can choose either a 3000K warm white, 4500K cool white, or 6000K daylight color temperature.

► **APPLICATION** - The FLOOR LAMP provides bright, yet smooth lighting for your family room, bedroom, or any other common area in your living space. This fixture is also Dry location rated.

► **ADVANTAGES** - ASD provides a 5-year limited warranty on the lamp body and a 2-year limited warranty on the Outlet Box. ETL certification guarantees top-quality products and safety.

► OPTIONS:

► **MODELS WITH OUTLET BOX** - The built-in outlet box provides USB-A, USB-C, and AC outlet ports for convenient charging of devices.



Finish: **Black**



PRODUCT PRESENTATION:

Model	Voltage	Bulb type	Frame finish	Lampshade finish	Dimensions	Feature	Certification
ASD-FLS-CN-E26-BN	120V	LED-A19 9W 3CCT E26	Black	Natural	11-13/16" x 11-13/16" x 70-1/16"	Cord 10.5 ft	ETL(4001931)
ASD-FLS-CN-E26-BW	120V	LED-A19 9W 3CCT E26	Black	White	11-13/16" x 11-13/16" x 70-1/16"	Cord 10.5 ft	ETL(4001931)
ASD-FLS-TR-E26-BN	120V	LED-A19 9W 3CCT E26	Black	Natural	10-1/4" x 10-1/4" x 62-3/16"	Cord 9.8 ft	ETL(4001931)
ASD-FLS-TR-E26-BN-UO	120V	LED-A19 9W 3CCT E26	Black	Natural	10-1/4" x 10-1/4" x 62-3/16"	Cord 9.8 ft	ETL(4001931)
ASD-FLS-TR-E26-BW	120V	LED-A19 9W 3CCT E26	Black	White	10-1/4" x 10-1/4" x 62-3/16"	Cord 9.8 ft	ETL(4001931)
ASD-FLS-TR-E26-BW-UO	120V	LED-A19 9W 3CCT E26	Black	White	10-1/4" x 10-1/4" x 62-3/16"	Cord 9.8 ft	ETL(4001931)
ASD-FLS-TT-E26-BN-UO	120V	LED-A19 9W 3CCT E26	Black	Natural	11-13/16" x 15-3/4" x 57-7/8"	Cord 9 ft	ETL(4001931)

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





FLOOR LAMP WITH SHELVES

FLS series

TECHNICAL PARAMETERS:

Model	Work environment	Operating temperature	Lampshade	Housing
ASD-FLS-CN-E26-BN	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-CN-E26-BW	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-TR-E26-BN	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-TR-E26-BN-UO	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-TR-E26-BW-UO	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-TR-E26-BW	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF
ASD-FLS-TT-E26-BN-UO	Dry	-4°F to 113°F (-20°C to 45°C)	Fabric	Iron, MDF

PACKAGE CONTENTS FLS-CN:

Description	Quantity
Bottom shelf (A)	1
Middle shelf (B)	3
Top shelf (C)	1
Steel pipe (D)	12
Lampshade (E)	1
Top steel frame (F)	1
Bulb (G)	1
Bottom steel frame (H)	1
Socket&cable (I)	1
Assembly screw (J)	7
Threaded stud (K)	10
Wall mounting kit (L)	1
Clip (M)	4
Rubber mat (N)	4
Wrench (O)	1
Box	1




PACKAGE CONTENTS FLS-TT-UO:

Description	Quantity
Tray table (A)	1
Middle shelf (B)	1
Bottom shelf (C)	1
Steel pipe (D)	8
Lampshade (E)	1
Lamp pole (F)	1
Bottom steel frame (G)	1
Top steel frame (H)	1
Bulb (I)	1
Retaining ring (J)	1
Socket&cable with Outlet box (K)	1
Assembly screw (L)	5
Short assembly screw (M)	3
Threaded stud with collar (N)	5
Threaded stud (O)	5
Rubber mat (P)	4
Wrench (Q)	1
Open-end wrench (R)	1
Cable organizer (S)	2
Velcro strap (T)	2
Box	1



PACKAGE CONTENTS FLS-TR:

Description	Quantity
Bottom shelf (A)	1
Middle shelf (B)	2
Top shelf (C)	1
Steel pipe (D)	12
Assembly screw (E)	9
Threaded stud (F)	9
Wrench (G)	1
Rubber mat (H)	4
Clip (I)	4
Socket&cable (J)	1
Steel frame (K)	1
Bulb (L)	1
Lampshade (M)	1
Box	1

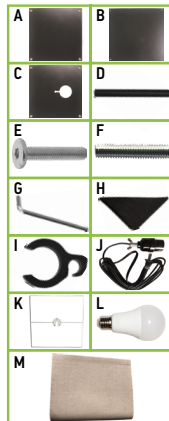


PACKAGE CONTENTS FLS-TR-UO:


Description	Quantity
Bottom shelf (A)	1
Middle shelf (B)	1
Middle shelf with 2 holes (C)	1
Top shelf (D)	1
Socket&cable with Outlet box (E)	1
Steel pipe (F)	12
Assembly screw (G)	9
Short assembly screw (H)	3
Threaded stud (I)	9
Rubber mat (J)	4
Clip (K)	4
Steel frame (L)	4
Bulb (M)	1
Wrench (N)	1
Lampshade (O)	1
Box	1



BUILT-IN OUTLET BOX:

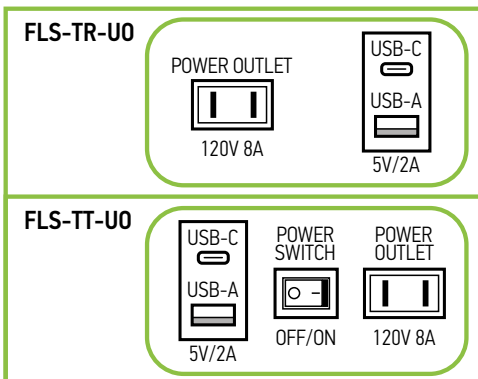

COLOR TEMPERATURE SETTINGS:

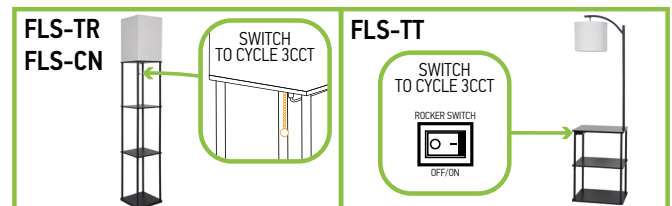

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





FLOOR LAMP WITH SHELVES

FLS series

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.


INSTALLATION STEPS FLS-TR AND FLS-TR-UO:

1. Fix the bottom shelf to the steel pipes using four screws. Attach the rubber mats. Continue installing the remaining two middle shelves, connecting them with threaded studs and steel pipes.
2. Attach the top shelf to the top steel pipes using screws. For models with Outlet Box, attach the Outlet Box to the third shelf using two short screws and a wrench. Feed the power cord through the C-shaped slot in the bracket. **Please do not tighten the nut before installing the lampshade.**
3. Mount the lampshade steel frame and secure it with the provided brackets. Tighten the wing nut under the socket to fix the lamp base. **Be careful not to overtighten.** Insert the bulb into the socket and connect the power plug to a 120V AC outlet. Arrange the cable neatly along the supports and secure it with the clips. Ensure all fasteners are tightened and the structure is stable before switching on the lamp.

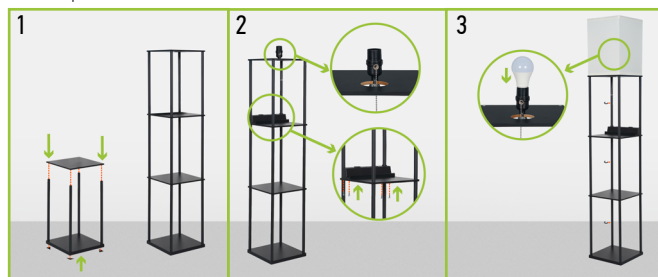


INSTALLATION STEPS FLS-CN:

1. Fix the bottom shelf to the steel pipes using three screws. Attach the rubber mats. Continue installing the remaining three middle shelves, connecting them with threaded studs and steel pipes.
2. Attach the top plate to the top steel pipes using screws. Feed the power cord through the C-shaped slot in the bracket. **Please do not tighten the nut before installing the lampshade.**
3. Mount the lampshade steel frame and secure it with the provided brackets. Tighten the wing nut under the socket to fix the lamp base. **Be careful not to overtighten.** Insert the bulb into the socket and connect the power plug to a 120V AC outlet. Arrange the cable neatly along the pipes and secure it with the clips. Ensure all fasteners are tightened and the structure is stable before switching on the lamp.

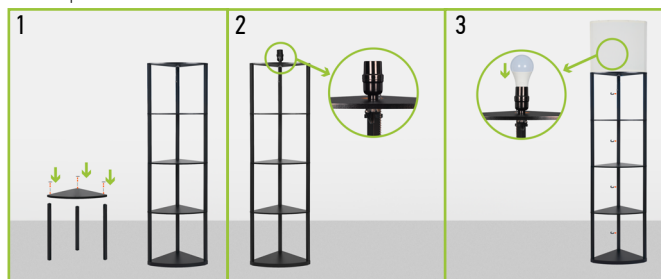

INSTALLATION STEPS FLS-TT-UO:

1. Attach the Outlet Box to the tray table using two short screws. Continue assembling the two shelves by connecting them with threaded studs and steel pipes. Attach the rubber mats and carefully flip the structure upright.
2. Assemble the lamp pole by connecting the two rods, then attach the top section with the lampholder, securing it with the internal thread. Loosen the washer underneath, insert the lampholder rod into the hole on the tray table, and tighten the washer using the open-end wrench.
3. Mount the lampshade steel frame and fix it with the provided brackets. Fix the lampshade by tightening the plastic retaining ring. Insert the bulb into the socket. Connect the power cable and neatly secure it under the tray table using the provided cable organizer and velcro straps. Plug into a 120V AC outlet. Arrange the cable neatly along the pipes and secure it with the provided clips. Ensure all fasteners are tightened and the structure is stable before switching on the lamp.

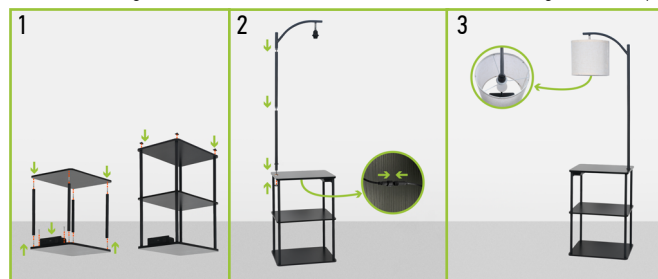

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





FLOOR LAMP WITH SHELVES

FLS series

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. Per carton	Carton size	Carton weight	UPC
ASD-FLS-CN-E26-BN	11-13/16" x 11-13/16" x 70-1/16"	11.7 lbs(5.3kg)	1	16.73" x 12.20" x 6.89"	12.8 lbs	81019020272
ASD-FLS-CN-E26-BW	11-13/16" x 11-13/16" x 70-1/16"	11.7 lbs(5.3kg)	1	16.73" x 12.20" x 6.89"	12.8 lbs	81019020271
ASD-FLS-TR-E26-BN	10-1/4" x 10-1/4" x 62-3/16"	8.4 lbs(3.8kg)	1	16.34" x 11.02" x 4.02"	9.0 lbs	81019020267
ASD-FLS-TR-E26-BN-UO	10-1/4" x 10-1/4" x 62-3/16"	8.8 lbs(4.0kg)	1	16.93" x 11.02" x 5.51"	9.7 lbs	81019020269
ASD-FLS-TR-E26-BW-UO	10-1/4" x 10-1/4" x 62-3/16"	8.8 lbs(4.0kg)	1	16.93" x 11.02" x 5.51"	9.7 lbs	81019020268
ASD-FLS-TR-E26-BW	10-1/4" x 10-1/4" x 62-3/16"	8.4 lbs(3.8kg)	1	16.34" x 11.02" x 4.02"	9.0 lbs	81019020266
ASD-FLS-TT-E26-BN-UO	11-13/16" x 15-3/4" x 57-7/8"	11.0 lbs(5.0kg)	1	17.32" x 13.19" x 5.12"	13.2 lbs	81019020270

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

