



LED WALL SCONCE

LWS-11 series

► **DESIGN** - LED WALL SCONCE has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The acrylic lens with a 120° beam angle grants you even light distribution.

► **VARIETY** - Available in 8", 10", 14" and 18" sizes. Choose from 120V or 120-277V options and finishes in Bronze, Black, or Nickel.

► **COLOR SELECTABLE** - You can choose either a 3000K warm white, 4000K cool white or 5000K daylight color temperature.

► **APPLICATION** - The LED WALL SCONCE provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. This fixture is also Damp Locations rated.

► **ADVANTAGES** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!



Finish: Nickel Bronze Black



8 inch
Black, Nickel



10 inch
Black, Bronze, Nickel



14 inch
Black, Nickel



18 inch
Nickel

PRODUCT SPECIFICATIONS:

Model	Size	Power	Voltage	Dimming	Lumens	CCT	Finish	Dimensions	Certification
ASD-LWS-11-8D15CC-BK	8 inch	15 W	120V	Triac	859lm	3,000/4,000/5,000 K	Black	7" x 3-5/16" x 8-5/16"	ETL(5032534), T24, JA8
ASD-LWS-11-8D15CC-NK	8 inch	15 W	120V	Triac	859lm	3,000/4,000/5,000 K	Nickel	7" x 3-5/16" x 8-5/16"	ETL(5032534), T24, JA8
ASD-LWS-11-D15CC-BK	10 inch	15 W	120V	Triac	1,107lm	3,000/4,000/5,000 K	Black	7" x 3-5/16" x 9-13/16"	ETL(5032534), T24, JA8
ASD-LWS-11-D15CC-BZ	10 inch	15 W	120V	Triac	1,107lm	3,000/4,000/5,000 K	Bronze	7" x 3-5/16" x 9-13/16"	ETL(5032534), T24, JA8
ASD-LWS-11-D15CC-NK	10 inch	15 W	120V	Triac	1,107lm	3,000/4,000/5,000 K	Nickel	7" x 3-5/16" x 9-13/16"	ETL(5032534), T24, JA8
ASD-LWS-11-D15CC-NK-2PACK	10 inch	15 W	120V	Triac	1,107lm	3,000/4,000/5,000 K	Nickel	7" x 3-5/16" x 9-13/16"	ETL(5032534), T24, JA8
ASD-LWS-11-14D20CC-BK	14 inch	20 W	120-277V	Triac	2,097lm	3,000/4,000/5,000 K	Black	7" x 3-5/16" x 14"	ETL(5032534), T24, JA8
ASD-LWS-11-14D20CC-NK	14 inch	20 W	120-277V	Triac	2,097lm	3,000/4,000/5,000 K	Nickel	7" x 3-5/16" x 14"	ETL(5032534), T24, JA8
ASD-LWS-11-18D25CC-NK	18 inch	25 W	120-277V	Triac	2,193lm	3,000/4,000/5,000 K	Nickel	7" x 3-5/16" x 18-1/16"	ETL(5032534), T24, JA8

TECHNICAL PARAMETERS:

Model	Work environment	Operating temperature	Power factor	Beam Angle	Surge protection	Housing	Lens	CRI
ASD-LWS-11-8D15CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	126°	2kV	Steel	Acrylic	>80
ASD-LWS-11-8D15CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	126°	2kV	Steel	Acrylic	>80
ASD-LWS-11-D15CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80
ASD-LWS-11-D15CC-BZ	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80
ASD-LWS-11-D15CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80
ASD-LWS-11-D15CC-NK-2PACK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	120°	1kV	Steel	Acrylic	>80
ASD-LWS-11-14D20CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	133°	2kV	Steel	Acrylic	>80
ASD-LWS-11-14D20CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	133°	2kV	Steel	Acrylic	>80
ASD-LWS-11-18D25CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	>0.9	118°	2kV	Steel	Acrylic	>80

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED WALL SCONCE

LWS-11 series


INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!


- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

ELECTRICAL SCHEMATIC DIAGRAM:

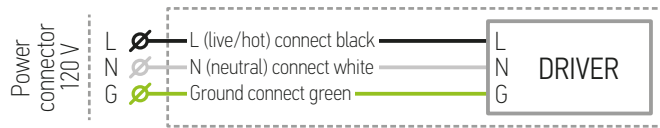

PACKAGE CONTENTS FOR 8 AND 10 INCH MODELS:

Description	Quantity
LED Wall Sconce	1 (2 for 2pack)
Crossbar (A)	1
Wire nut (B)	3
Mounting screw (C)	4
Foam protect fixture	2
Box	1



⚠ WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

PACKAGE CONTENTS FOR 14 AND 18 INCH MODELS:

Description	Quantity
LED Wall Sconce	1
Mounting plate (A)	1
Wire nut (B)	3
Mounting screw (C)	2
Self-tapping screw (D)	2
Anchor (E)	4
Foam protect fixture	2
Box	1




INSTALLATION STEPS FOR 8 AND 10 INCH MODELS:

1. Slide the acrylic lens up and remove it. Attach the Crossbar to the Outlet Box with two mounting screws. Thread the other two screws into the appropriate holes of the Crossbar.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Carefully tuck all the wires into the Outlet box.
3. Put the fixture back plate to mounting surface allowing mounting screws to protrude through keyhole slots and tighten it securely. Choose preferred color temperature by adjusting the switch. Fix the acrylic lens by sliding it down.



INSTALLATION STEPS FOR 14 AND 18 INCH MODELS:

1. Pull the supply and ground wires out of the outlet box. Mark two holes on the wall, drill 5/16" holes, insert drywall anchors, then secure the bracket to the outlet box with the two supplied screws and to the wall with the anchor screws.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Install the green grounding screw in the side hole of the bracket, secure the ground wires under it, and carefully tuck all the wires in to the Outlet box.
3. Choose preferred color temperature by adjusting the switch. Place the fixture base over the outlet box, secure with the provided screws and tighten them until the fixture is firmly mounted. Restore power at the circuit breaker and turn on the wall switch to test the fixture.

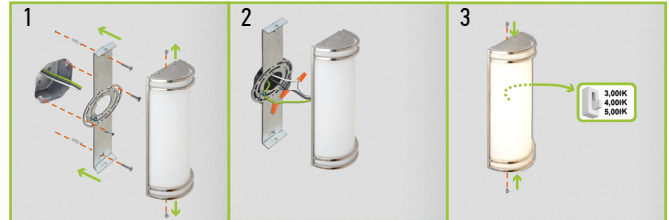

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. Per carton	Carton size	Carton weight	UPC	GTIN 14
ASD-LWS-11-8D15CC-BK	7" x 3-5/16" x 8-5/16"	1.8 lbs(0.8kg)	4	18.90" x 10.04" x 10.83"	9.8 lbs	81019020246	10810190202460
ASD-LWS-11-8D15CC-NK	7" x 3-5/16" x 8-5/16"	1.8 lbs(0.8kg)	4	18.90" x 10.04" x 10.83"	9.8 lbs	81019020245	10810190202453
ASD-LWS-11-D15CC-BK	7" x 3-5/16" x 9-13/16"	2.2 lbs(1.0kg)	4	18.90" x 10.04" x 12.40"	11.3 lbs	81012811251	10810128112519
ASD-LWS-11-D15CC-BZ	7" x 3-5/16" x 9-13/16"	2.2 lbs(1.0kg)	4	18.90" x 10.04" x 12.40"	11.3 lbs	81005073227	30810050732278
ASD-LWS-11-D15CC-NK	7" x 3-5/16" x 9-13/16"	2.2 lbs(1.0kg)	4	18.90" x 10.04" x 12.40"	11.3 lbs	81005073226	30810050732261
ASD-LWS-11-D15CC-NK-2PACK	7" x 3-5/16" x 9-13/16"	4.4 lbs(2.0kg)	2	18.90" x 9.65" x 12.40"	11.3 lbs	81012811368	10810128113684
ASD-LWS-11-14D20CC-BK	7" x 3-5/16" x 14"	3.1 lbs(1.4kg)	2	10.24" x 9.65" x 16.46"	7.9 lbs	81019020165	10810190201654
ASD-LWS-11-14D20CC-NK	7" x 3-5/16" x 14"	3.1 lbs(1.4kg)	2	10.24" x 9.65" x 16.46"	7.9 lbs	81019020166	10810190201661
ASD-LWS-11-18D25CC-NK	7" x 3-5/16" x 18-1/16"	3.7 lbs(1.7kg)	2	10.04" x 9.65" x 20.47"	9.9 lbs	81019020164	10810190201647

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

