
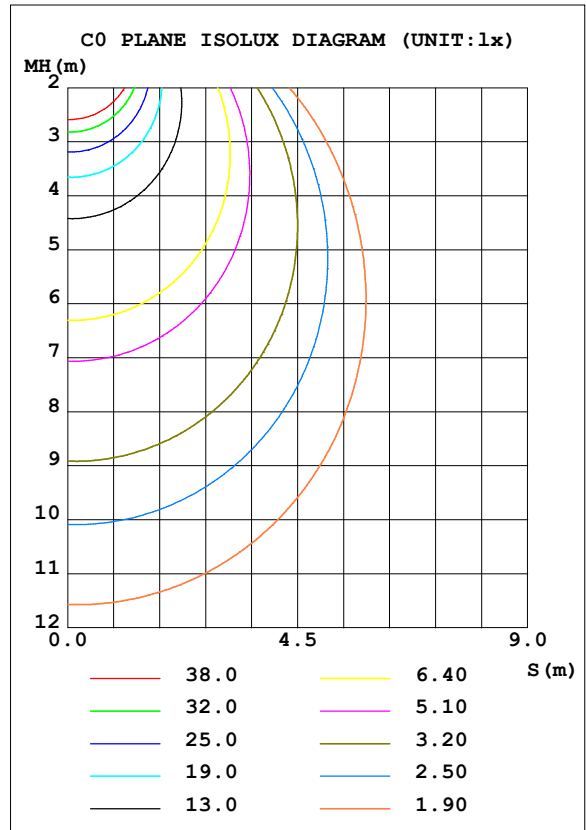


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 87.08 lm/W			
MODEL	ASD-JBRB-4D9WH	I _{max} (cd)	254.9	S/MH (C0/180)	1.23
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	740.15	η UP, DN (C0-180)	0.9, 48.4
NOMINAL FLUX (lm)	740.143	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 49.9
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	η down (%)	98.3	CIBSE SHR MAX	1.35

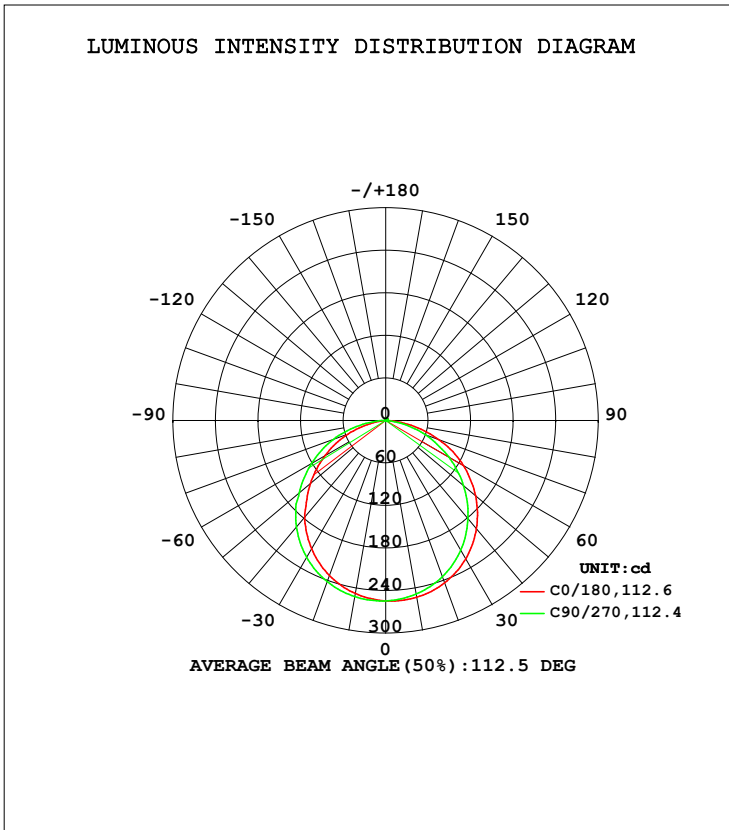

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	253.2	251.2	248.7	247.7	247.7	249.9	252.2	253.2	0- 10	24.10	24.10	3.26,3.26
20	243.7	239.4	234.4	232.3	232.6	236.9	241.8	243.7	10- 20	69.26	93.36	12.6,12.6
30	225.7	219.2	211.6	208.8	209.2	215.6	222.9	226.0	20- 30	105.4	198.8	26.9,26.9
40	199.2	190.7	180.8	177.3	178.0	186.3	195.9	199.6	30- 40	127.5	326.3	44.1,44.1
50	165.6	153.2	143.7	137.7	138.6	150.5	159.3	166.3	40- 50	131.7	458.0	61.9,61.9
60	126.4	113.9	102.8	97.39	98.46	110.4	120.5	127.5	50- 60	118.3	576.3	77.9,77.9
70	80.01	72.69	60.07	56.21	56.93	67.66	79.15	84.30	60- 70	90.13	666.4	90,90
80	31.92	30.37	16.69	16.43	14.24	25.51	33.25	38.69	70- 80	50.45	716.9	96.9,96.9
90	1.597	1.825	1.573	1.654	1.052	1.219	1.229	5.771	80- 90	10.74	727.6	98.3,98.3
100	1.630	1.700	1.730	1.769	1.291	1.198	1.175	1.101	90-100	1.581	729.2	98.5,98.5
110	1.837	1.871	1.921	1.948	1.591	1.484	1.461	1.379	100-110	1.655	730.8	98.7,98.7
120	1.994	2.045	2.081	2.125	1.885	1.770	1.759	1.682	110-120	1.790	732.6	99,99
130	2.151	2.188	2.235	2.287	2.154	2.050	2.031	1.978	120-130	1.816	734.4	99.2,99.2
140	2.320	2.382	2.431	2.472	2.438	2.337	2.300	2.267	130-140	1.739	736.2	99.5,99.5
150	2.558	2.606	2.656	2.710	2.710	2.611	2.578	2.567	140-150	1.565	737.7	99.7,99.7
160	2.797	2.833	2.878	2.923	2.948	2.853	2.850	2.817	150-160	1.267	739.0	99.8,99.8
170	3.024	3.029	3.068	3.091	3.131	3.052	3.068	3.035	160-170	0.8385	739.8	100,100
180	3.173	3.142	3.155	3.159	3.175	3.142	3.158	3.153	170-180	0.2964	740.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

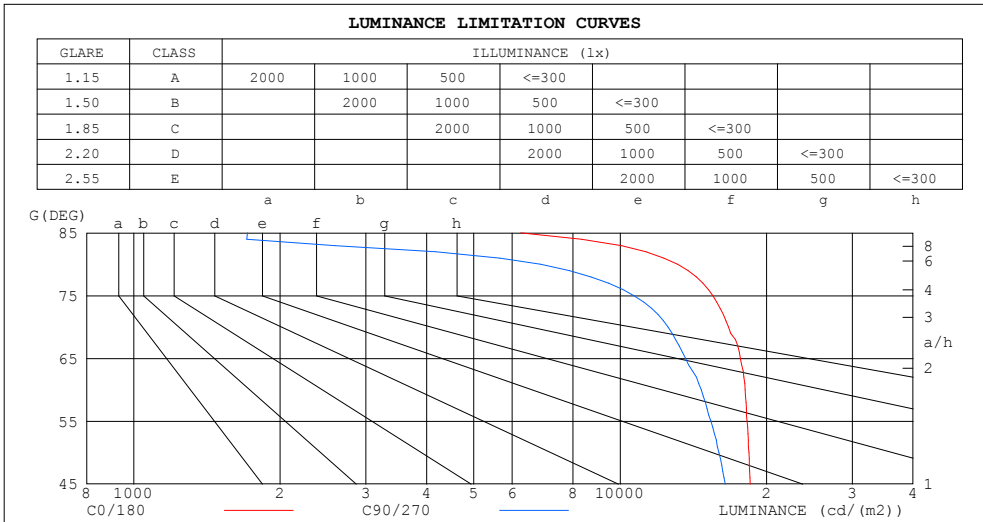

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6248	1713
80	13125	6864
75	15494	10667
70	16706	12545
65	17676	13622
60	18057	14677
55	18230	15360
50	18392	15965
45	18507	16454

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

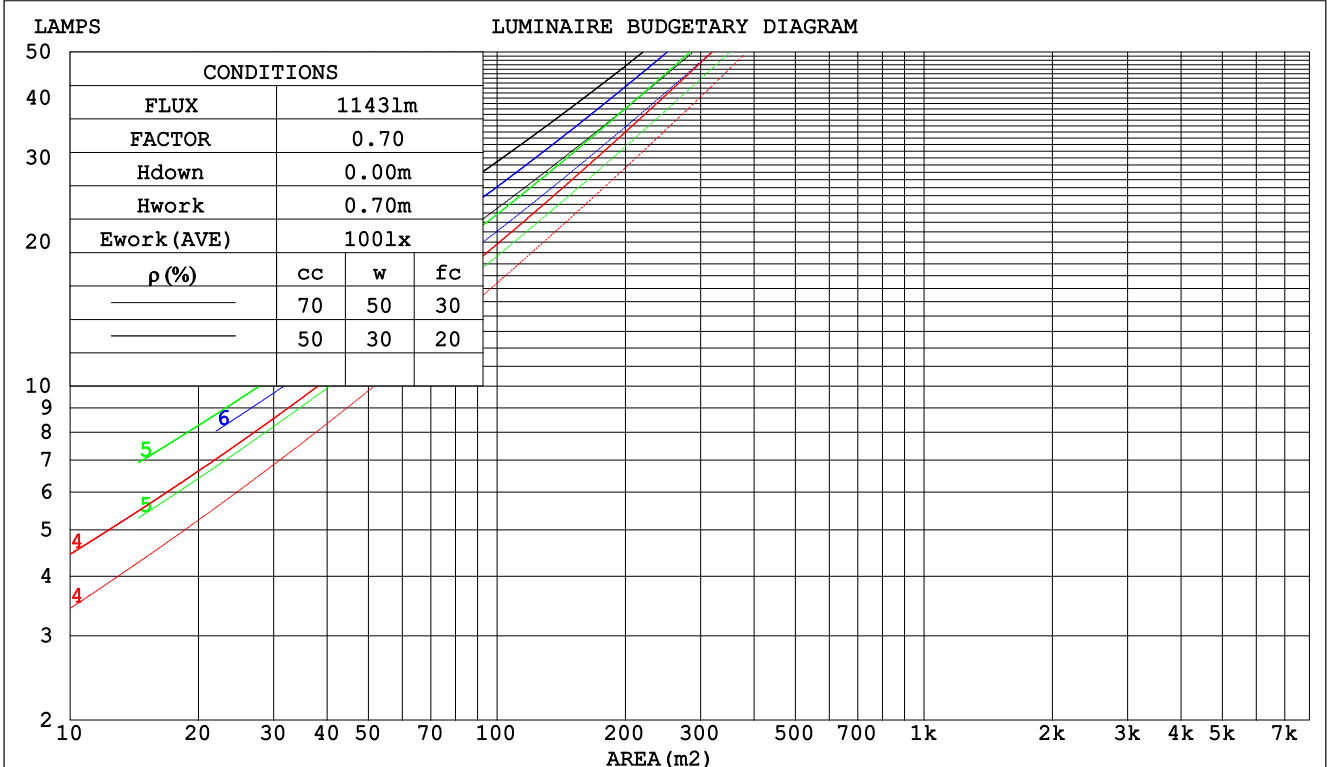

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm					
NAME: ASD-JBRB-4D9WH			TYPE:		WEIGHT:
SPEC.:5000K			DIM.:		SERIAL No.:
MFR.: ASD Lighting Corp			SUR.:0.08		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.173	.055	.297	.169	.054	.283	.162	.052	.270	.156	.050	.258	.149	.048	
2.0	.289	.158	.049	.282	.155	.048	.269	.150	.047	.258	.145	.045	.247	.140	.044	
3.0	.268	.143	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.224	.115	.034	.216	.112	.033	.207	.109	.033	.200	.107	.032	
6.0	.213	.107	.031	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.180	.093	.027	.174	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.175	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.148	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.185	.145	.112	.158	.125	.096	.109	.086	.067	.063	.050	.039	.020	.016	.013	
3.0	.177	.127	.088	.152	.110	.076	.104	.076	.053	.060	.045	.031	.019	.014	.010	
4.0	.170	.114	.072	.146	.099	.062	.100	.069	.044	.058	.040	.026	.019	.013	.009	
5.0	.162	.104	.061	.139	.090	.053	.096	.063	.037	.056	.037	.022	.018	.012	.007	
6.0	.155	.095	.053	.133	.083	.046	.092	.058	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.089	.047	.128	.077	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
8.0	.142	.083	.042	.122	.072	.037	.085	.050	.026	.049	.030	.016	.016	.010	.005	
9.0	.136	.078	.039	.117	.068	.034	.081	.048	.024	.047	.028	.014	.015	.009	.005	
10.0	.130	.074	.036	.112	.064	.031	.078	.045	.022	.045	.027	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm										
NAME: ASD-JBRB-4D9WH					TYPE:			WEIGHT:		
SPEC.:5000K					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:0.08			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.6	24.4	25.8	26.0	23.3	24.8	23.6	25.1	25.3
3H	25.7	27.1	26.0	27.3	27.6	24.7	26.1	25.0	26.3	26.6
4H	26.4	27.7	26.7	27.9	28.2	25.2	26.5	25.5	26.8	27.1
6H	26.8	28.0	27.1	28.3	28.6	25.4	26.6	25.7	26.9	27.2
8H	26.9	28.1	27.3	28.4	28.7	25.4	26.6	25.8	26.9	27.2
12H	26.9	28.0	27.3	28.4	28.7	25.3	26.5	25.7	26.8	27.1
4H 2H	24.6	25.9	24.9	26.2	26.5	24.0	25.3	24.4	25.6	25.9
3H	26.4	27.6	26.8	27.9	28.2	25.6	26.7	26.0	27.1	27.4
4H	27.2	28.2	27.6	28.6	29.0	26.2	27.2	26.6	27.6	28.0
6H	27.8	28.7	28.2	29.1	29.5	26.5	27.5	27.0	27.8	28.2
8H	27.9	28.8	28.4	29.2	29.6	26.5	27.4	27.0	27.8	28.2
12H	28.0	28.7	28.4	29.2	29.6	26.5	27.3	27.0	27.7	28.2
8H 4H	27.4	28.3	27.9	28.7	29.1	26.5	27.4	27.0	27.8	28.2
6H	28.1	28.8	28.6	29.3	29.7	27.0	27.7	27.5	28.2	28.6
8H	28.3	29.0	28.8	29.4	29.9	27.1	27.7	27.6	28.2	28.7
12H	28.4	29.0	28.9	29.4	30.0	27.1	27.6	27.6	28.1	28.6
12H 4H	27.4	28.2	27.9	28.6	29.1	26.6	27.4	27.0	27.8	28.2
6H	28.2	28.8	28.6	29.2	29.7	27.1	27.7	27.6	28.2	28.7
8H	28.4	28.9	28.9	29.4	29.9	27.2	27.7	27.7	28.2	28.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 740.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
 Area: 0.014 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	86	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	100	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

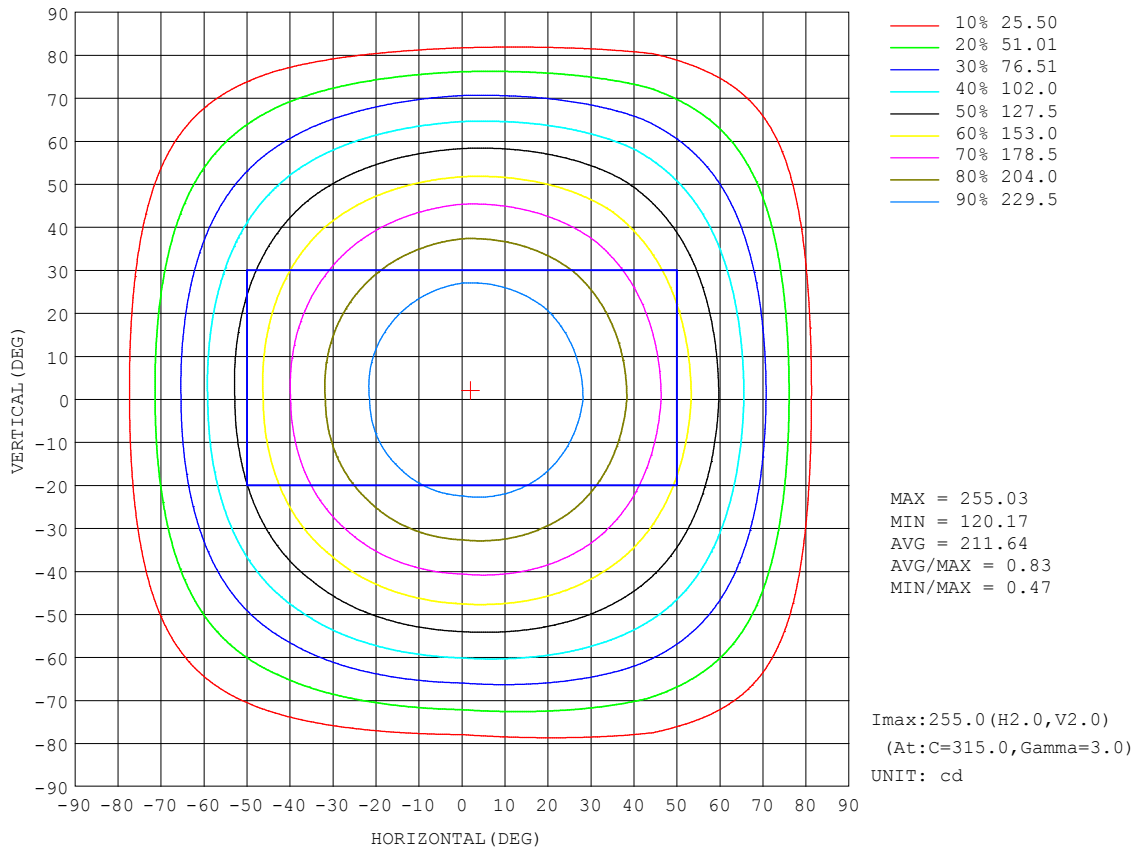


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

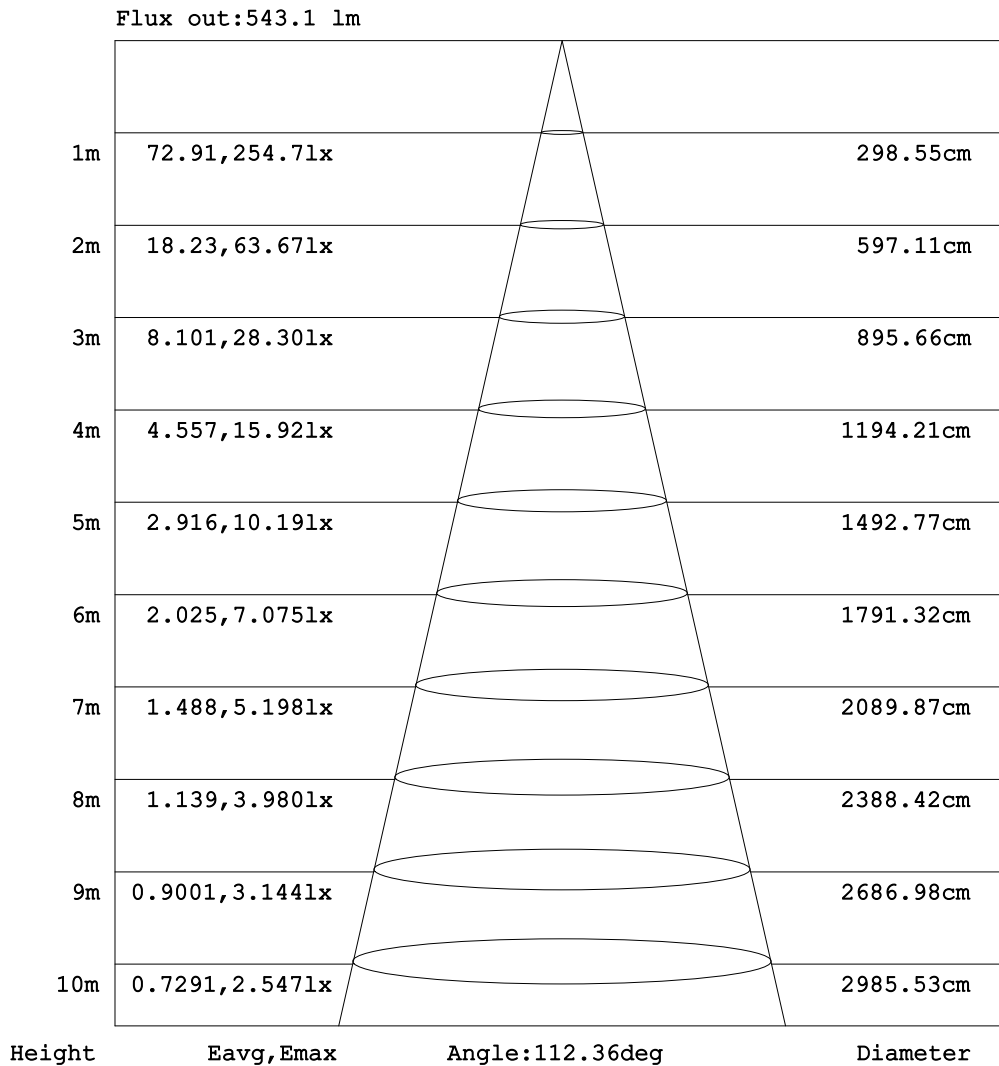

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

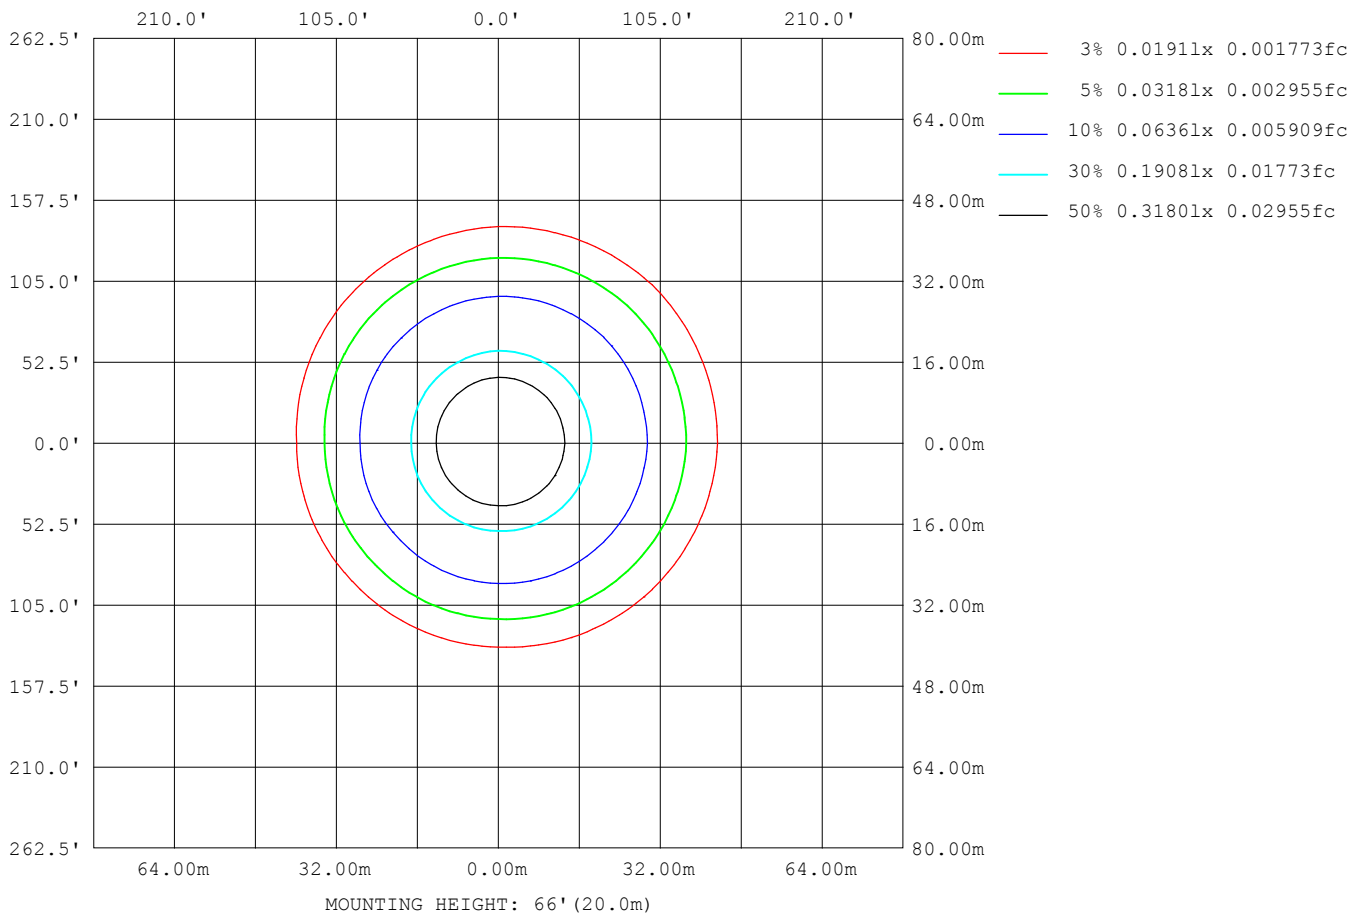

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15422
L_0~180 (75) av	12635
L_0~180 (85) av	3894
L_90~270 (65) av	15266
L_90~270 (75) av	13089
L_90~270 (85) av	5019
L_45 (65) av	15455
L_45 (75) av	13580
L_45 (85) av	7981

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

Planar Illuminance Curve

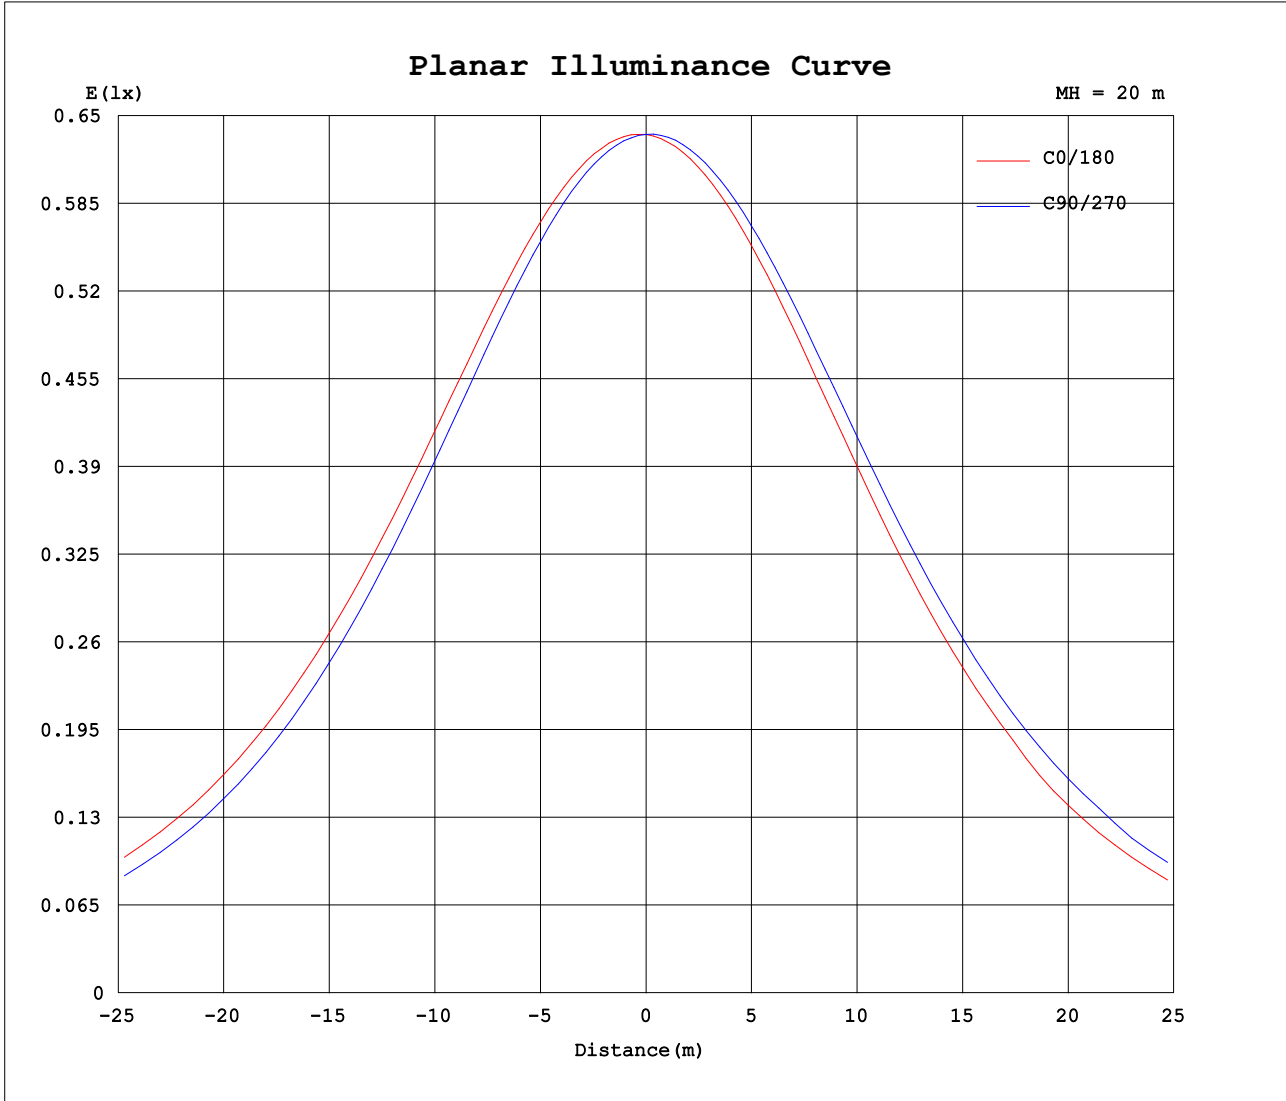

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.10V I:0.0740A P:8.5000W PF:0.9460 Freq:60.00Hz Lamp Flux:740.143x1 lm		
NAME: ASD-JBRB-4D9WH	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:0.08	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	254	254	254	254	254	254	254	254											
5	255	254	253	252	252	253	254	255											
10	253	251	249	248	248	250	252	253											
15	249	246	243	241	241	244	248	249											
20	244	239	234	232	233	237	242	244											
25	236	230	224	221	222	227	233	236											
30	226	219	212	209	209	216	223	226											
35	213	206	197	194	194	202	210	214											
40	199	191	181	177	178	186	196	200											
45	183	174	163	157	158	169	180	184											
50	166	153	144	138	139	151	159	166											
55	146	134	123	118	119	131	140	147											
60	126	114	103	97.4	98.5	110	121	127											
65	105	93.3	80.6	76.7	77.9	88.9	100	107											
70	80.0	72.7	60.1	56.2	56.9	67.7	79.2	84.3											
75	56.2	52.1	38.7	36.3	35.4	46.9	56.2	61.6											
80	31.9	30.4	16.7	16.4	14.2	25.5	33.3	38.7											
85	7.63	10.3	2.09	3.16	1.88	7.28	10.2	18.2											
90	1.60	1.83	1.57	1.65	1.05	1.22	1.23	5.77											
95	1.55	1.65	1.64	1.69	1.16	1.13	1.04	1.05											
100	1.63	1.70	1.73	1.77	1.29	1.20	1.18	1.10											
105	1.73	1.78	1.84	1.86	1.44	1.33	1.32	1.23											
110	1.84	1.87	1.92	1.95	1.59	1.48	1.46	1.38											
115	1.91	1.97	2.01	2.04	1.74	1.63	1.61	1.54											
120	1.99	2.04	2.08	2.12	1.89	1.77	1.76	1.68											
125	2.08	2.12	2.16	2.20	2.02	1.90	1.90	1.84											
130	2.15	2.19	2.24	2.29	2.15	2.05	2.03	1.98											
135	2.23	2.28	2.33	2.38	2.30	2.20	2.16	2.12											
140	2.32	2.38	2.43	2.47	2.44	2.34	2.30	2.27											
145	2.43	2.49	2.56	2.60	2.58	2.47	2.44	2.41											
150	2.56	2.61	2.66	2.71	2.71	2.61	2.58	2.57											
155	2.67	2.72	2.77	2.82	2.83	2.74	2.72	2.70											
160	2.80	2.83	2.88	2.92	2.95	2.85	2.85	2.82											
165	2.93	2.94	2.98	3.02	3.05	2.96	2.97	2.93											
170	3.02	3.03	3.07	3.09	3.13	3.05	3.07	3.04											
175	3.11	3.10	3.13	3.14	3.18	3.11	3.14	3.11											
180	3.17	3.14	3.16	3.16	3.18	3.14	3.16	3.15											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-05-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks: