



MINI-PENDANT

MP44 series

DESIGN: MINI-PENDANT have a sleek, classic design that will help transform any space in your home. The height selectable cord allows you to customize the fixture and give it the desired look. Durable housing resistant to rust and impact provides many years of service. The opal glass shades grant you even light distribution. It is designed to operate on 120V circuits.

BULBS: The fixture includes a standard E26 medium base which is compatible with a variety of incandescent, CFL or LED bulbs less than 60W.

Quick and easy hardwired installation.

APPLICATION: These fixtures create a bright light. It is perfect for kitchen tables, bars, living room sitting areas, and workshops. You can hang these pendants one by one or in a group to create a specific style. They are also Damp Locations rated.

ADVANTAGES: ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

Nickel

FINISH



PRODUCT PRESENTATION

MODEL	BULB TYPE	FINISH	SHADE	DIMENSIONS	CERTIFICATION
ASD-MP44-11-2660-NK	1 x E26 60W max	Satin nickel	Opal glass	4-3/4" x 4-3/4" x 51-3/16"	ETL (4001256)

TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	HOUSING	LENS
ASD-MP44-11-2660-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	Steel	Opal Glass

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 14
ASD-MP44-11-2660-NK	4 3/4" x 4 3/4" x 51 3/16"	1.6 lbs(0.7kg)	12	20.87" x 13.78" x 22.83"	26.3 lbs	81005073268	20810050732684

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION


- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

- Risk of personal injury:** read and follow all warnings and installation instructions. Keep or give to the owner for future reference.
- Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.
- Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.
- ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.**

PACKAGE CONTENTS

DESCRIPTION	QUANTITY
Mini-Pendant	1
Mounting bracket(A)	1
Fixture screw (B)	2
Wire nut (C)	3
Mounting screw (D)	2
Box	1

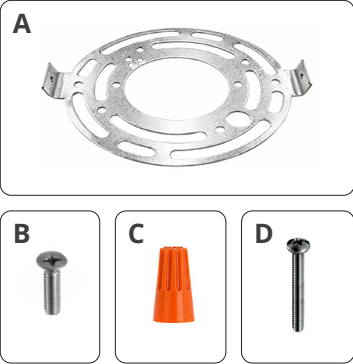

INSTALLATION STEPS MINI-PENDANT

- Remove the metal ring from the E26 socket, attach the Glass Shade, insert a bulb and secure it with the metal ring.
- Attach the mounting bracket to the outlet box using two mounting screws. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Carefully tuck all wires back in to the outlet box.
- Place the fixture to the outlet box by aligning two holes on the ceiling plate to the mounting bracket. Tighten the ceiling plate to the mounting bracket using two fixture screws. Installation complete.

