



BULB ROUND OUTDOOR WALL CYLINDER

OCLR series

► **DESIGN** - BULB ROUND OUTDOOR WALL CYLINDERS has a modern design with effective up, down, or dual-direction illumination. This E26 base fixture is made from die-cast aluminum and a tempered glass cover.

► **VARIETY** - The fixture comes in round shape in 8-inch and 12-inch sizes with up, down or dual-direction installation options, and is available in White, Black, and Stainless Steel finishes. Some models also feature an additional decorative ring for enhanced elegance and visual appeal. A high-quality reflector provides a 50° beam angle.

► **BULBS** - The fixture includes a standard E26 medium base. We recommend to use LED A19 bulb.

► **APPLICATION** - The fixture is rated for Wet location, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

► **ADVANTAGES** - ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

► OPTIONS

► **MODELS WITH PHOTOCELL** - The built-in Dusk to Dawn Photocell will automatically turn the fixture on/off depending on the time of day.



Finish: ☐ White ☐ Stainless steel ☒ Black



PRODUCT PRESENTATION:

Model	Number of lights	Bulb type	Finish	Dimensions	Pre-installed	Certification
OCLR ROUND						
ASD-OCLR-1A-WH	1 light	E26 60W max	White	4-3/8" x 6-7/16" x 7-7/8"	-	ETL (5032534)
ASD-OCLR-1A-SS	1 light	E26 60W max	Stainless steel	4-3/8" x 6-9/16" x 7-7/8"	-	ETL (5032534)
ASD-OCLR-1A-BK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	-	ETL (5032534)
ASD-OCLR-1A-PC-BK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	Photocell	ETL (5032534)
ASD-OCLR-2A-WH	2 light	E26 60W max	White	4-3/8" x 6-7/16" x 11-13/16"	-	ETL (5032534)
ASD-OCLR-2A-SS	2 light	E26 60W max	Stainless steel	4-3/8" x 6-9/16" x 11-13/16"	-	ETL (5032534)
ASD-OCLR-2A-BK	2 light	E26 60W max	Black	4-3/8" x 6-7/16" x 11-13/16"	-	ETL (5032534)
ASD-OCLR-2A-PC-BK	2 light	E26 40W max	Black	4-3/8" x 6-9/16" x 11-13/16"	Photocell	ETL (5032534)
OCLR ROUND WITH DECORATIVE RING						
ASD-OCLR-1B-BK	1 light	E26 60W max	Black	4-3/8" x 6-9/16" x 7-15/16"	-	ETL (5032534)
ASD-OCLR-2B-BK	2 light	E26 60W max	Black	4-3/8" x 6-9/16" x 11-13/16"	-	ETL (5032534)

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





BULB ROUND OUTDOOR WALL CYLINDER

OCLR series

TECHNICAL PARAMETERS:

Model	Work environment	Operating temperature	Surge protection	Housing	Lens	Beam Angle
OCLR ROUND						
ASD-OCLR-1A-WH	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-1A-SS	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-1A-BK	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-1A-PC-BK	Wet location	-40°F to 113°F (-20°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-2A-WH	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-2A-SS	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-2A-BK	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-2A-PC-BK	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
OCLR ROUND WITH DECORATIVE RING						
ASD-OCLR-1B-BK	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°
ASD-OCLR-2B-BK	Wet location	-40°F to 113°F (-40°C to 45°C)	1kV	Aluminum	Glass	50°

PACKAGE CONTENTS:

Description	Quantity
Bulb Outdoor Wall Cylinder	1
Mounting plate (A)	1
Wire nut (B)	3
Mounting screw (C)	2
Outlet box screw (D)	2
Glass cover screw (E) only for OCLR-B models	3 for OCLR-1B, 6 for OCLR-2B
Decorative nut (F)	2
Waterproof gasket (G)	2
Photocell cap (H) only for PC models	1
Box	1



BUILT-IN PHOTOCELL INFORMATION

Specifications	Model: MD-EP-120R
Input power	120 Vac, 60 Hz
Light level to turn ON	30 ~ 150 lux (2.8 ~ 14 fc)
Light level to turn OFF	200 ~ 800 lux (18.6 ~ 74.4 fc)
Operating temperature	-4°F to 113°F (-20°C to 45°C)

The dusk-to-dawn sensor automatically turns the fixture off during daylight hours.

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

INSTALLATION STEPS:

1. Remove the glass lid, install the bulbs (A19/60W max) and close the lid. In models with photocell option remove the photocell cap to make the dusk-to-dawn sensor operate. Screw the two mounting screws onto the mounting plate. Attach the mounting plate to the outlet box using the screws. Make sure the threads of the mounting screws are facing out when the mounting plate is attached to the outlet box.
2. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Place the fixture base on the wall by aligning the protruding mounting screws through the holes on the wall plate.
3. Put a waterproof gasket on each mounting screw. Tighten the fixture to the wall using two decorative nuts.

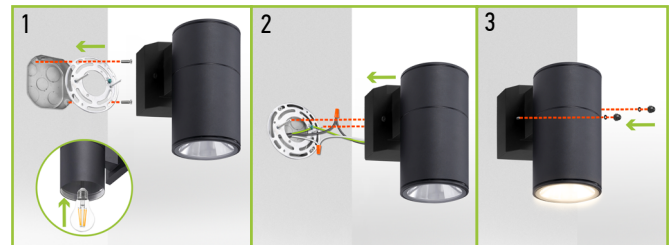

* The fixture must be mounted vertically with the photocell sensor facing up.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





BULB ROUND OUTDOOR WALL CYLINDER

OCLR series

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. (pack) per carton	Carton size	Carton weight	UPC	GTIN 14
OCLR ROUND							
ASD-OCLR-1A-WH	4 3/8" x 6 7/16" x 7 7/8"	1.9 lbs(0.9kg)	2	11.4" x 7.9" x 9.7"	4.4 lbs	810128117210	10810128117217
ASD-OCLR-1A-SS	4 3/8" x 6 9/16" x 7 7/8"	1.9 lbs(0.9kg)	6	16.7" x 15.4" x 9.7"	16.7 lbs	810190200360	10810190200367
ASD-OCLR-1A-BK	4 3/8" x 6 7/16" x 7 7/8"	1.9 lbs(0.9kg)	2	11.4" x 7.9" x 9.7"	4.4 lbs	810128117203	10810128117200
ASD-OCLR-1A-PC-BK	4-3/8" x 6-7/16" x 7-7/8"	0.9 lbs(0.4kg)	2	11.4" x 7.9" x 9.7"	2 lbs	810128116343	10810128116340
ASD-OCLR-2A-WH	4-3/8" x 6-7/16" x 11-13/16"	2.5 lbs(1.2kg)	2	11.4" x 7.9" x 13.6"	6.8 lbs	810128117234	10810128117231
ASD-OCLR-2A-SS	4-3/8" x 6-9/16" x 11-13/16"	2.5 lbs(1.1kg)	6	16.7" x 15.4" x 13.6"	19.7 lbs	810190200377	10810190200374
ASD-OCLR-2A-BK	4-3/8" x 6-7/16" x 11-13/16"	2.5 lbs(1.2kg)	2	11.4" x 7.9" x 13.6"	6.8 lbs	810128117227	10810128117224
ASD-OCLR-2A-PC-BK	4-3/8" x 6-7/16" x 11-13/16"	2.5 lbs(1.2kg)	2	11.4" x 7.9" x 13.6"	6.8 lbs	810128117241	10810128117248
OCLR ROUND WITH DECORATIVE RING							
ASD-OCLR-1B-BK	4-3/8" x 6-9/16" x 7-15/16"	1.9 lbs(0.9kg)	2	11.4" x 7.9" x 9.7"	4.4 lbs	810128115148	10810128115145
ASD-OCLR-2B-BK	4-3/8" x 6-9/16" x 11-13/16"	2.4 lbs(1.1kg)	2	11.4" x 7.9" x 13.6"	6.5 lbs	810128115155	10810128115152

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

