



# LED UFO HIGH BAY SLIM

► **DESIGN** - LED UFO HIGH BAY SLIM WITH 5FT CORD AND NEMA 5-15 PLUG features a durable die-cast aluminum housing that ensures excellent heat dissipation, paired with an anti-glare PC lens for long-lasting performance. With an IP65 rating, it is built for reliable operation in various environments, while the 4kV surge protection safeguards against voltage spikes and power surges.

► **WIDE VOLTAGE RANGE** - This fixture supports a voltage range from 120 to 277 volts, ensuring outstanding adaptability. This flexibility makes it ideal for various commercial and industrial settings.

► **5FT CORD WITH PLUG** - A 5-ft cord with a NEMA 5-15 plug is included, ensuring quick and easy installation.

► **INSTALLATION** - The installation is performed using a suspension system, allowing for secure and flexible mounting. This method is ideal for spaces with high ceilings or where other mounting options are impractical.

► **ADVANTAGES** - With calculated lifespan up to 50 000 hours, these fixtures are made to last decades under normal operation! ASD provides a 3-year limited warranty along with ETL certification to guarantee top quality products and safety!



## PRODUCT PRESENTATION:

| Model                       | Power | Voltage  | Dimming | Lumens   | CCT    | Finish | Dimensions                     | Feature                  | Certification |
|-----------------------------|-------|----------|---------|----------|--------|--------|--------------------------------|--------------------------|---------------|
| ASD-UHS-MV-100N50-5CP-BK-6P | 100W  | 120-277V | No      | 12,014lm | 5,000K | Black  | 10-1/4" x 10-1/4" x 2-7/8"     | 5 ft cord NEMA 5-15 plug | ETL (5029883) |
| ASD-UHS-MV-150N50-5CP-BK-6P | 150W  | 120-277V | No      | 17,966lm | 5,000K | Black  | 11-5/8" x 11-5/8" x 2-7/8"     | 5 ft cord NEMA 5-15 plug | ETL (5029883) |
| ASD-UHS-MV-200N50-5CP-BK-6P | 200W  | 120-277V | No      | 23,888lm | 5,000K | Black  | 12-13/16" x 12-13/16" x 2-7/8" | 5 ft cord NEMA 5-15 plug | ETL (5029883) |

## ORDERING INFORMATION

| Model                       | Product dimensions             | Weight            | Pcs. (pack) per carton | Carton size           | Carton weight | UPC          | GTIN 14 in carton |
|-----------------------------|--------------------------------|-------------------|------------------------|-----------------------|---------------|--------------|-------------------|
| ASD-UHS-MV-100N50-5CP-BK-6P | 10-1/4" x 10-1/4" x 2-7/8"     | 9.9 lbs (4.5 kg)  | 6 (1)                  | 24.6" x 11.6" x 12.4" | 23.3 lbs      | 810128119979 | 10810128119976    |
| ASD-UHS-MV-150N50-5CP-BK-6P | 11-5/8" x 11-5/8" x 2-7/8"     | 12.5 lbs (5.7 kg) | 6 (1)                  | 24.6" x 13" x 13.8"   | 29.3 lbs      | 810128119986 | 10810128119983    |
| ASD-UHS-MV-200N50-5CP-BK-6P | 12-13/16" x 12-13/16" x 2-7/8" | 15.2 lbs (6.9 kg) | 6 (1)                  | 24.6" x 14.2" x 15"   | 35 lbs        | 810190200131 | 10810190200138    |

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)





# LED UFO HIGH BAY SLIM

## TECHNICAL PARAMETERS:

| Model                       | Max input current | Inrush current | Work environment | Operating temperature         | Power factor | Surge protection | Housing  | Lens | CRI  |
|-----------------------------|-------------------|----------------|------------------|-------------------------------|--------------|------------------|----------|------|------|
| ASD-UHS-MV-100N50-5CP-BK-6P | 1.20 A            | 40 A           | Wet location     | -4°F to 104°F (-20°C to 40°C) | > 0.9        | 4 kV             | Aluminum | PC   | > 80 |
| ASD-UHS-MV-150N50-5CP-BK-6P | 1.8 A             | 40 A           | Wet location     | -4°F to 104°F (-20°C to 40°C) | > 0.9        | 4 kV             | Aluminum | PC   | > 80 |
| ASD-UHS-MV-200N50-5CP-BK-6P | 2.30 A            | 60 A           | Wet location     | -4°F to 104°F (-20°C to 40°C) | > 0.9        | 4 kV             | Aluminum | PC   | > 80 |

## INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

### ⚠ WARNING

**Risk of personal injury** – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.


### PACKAGE CONTENTS:

| Description                 | Quantity |
|-----------------------------|----------|
| LED UFO High Bay Slim       | 6        |
| Mounting ring (A)           | 6        |
| 5ft cord NEMA 5-15 plug (B) | 6        |
| Box                         | 1        |

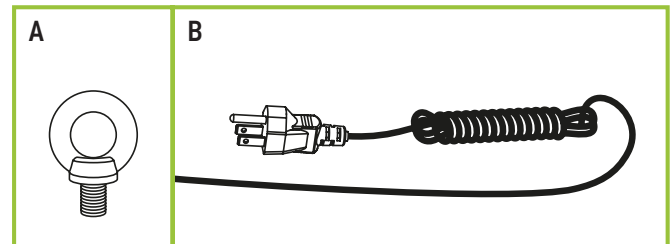

### INSTALLATION STEPS:

1. Screw on the mounting ring (included) and tighten it.
2. Clip the fixture on the hook in the ceiling using the mounting ring.
3. Plug the power cable into the socket.

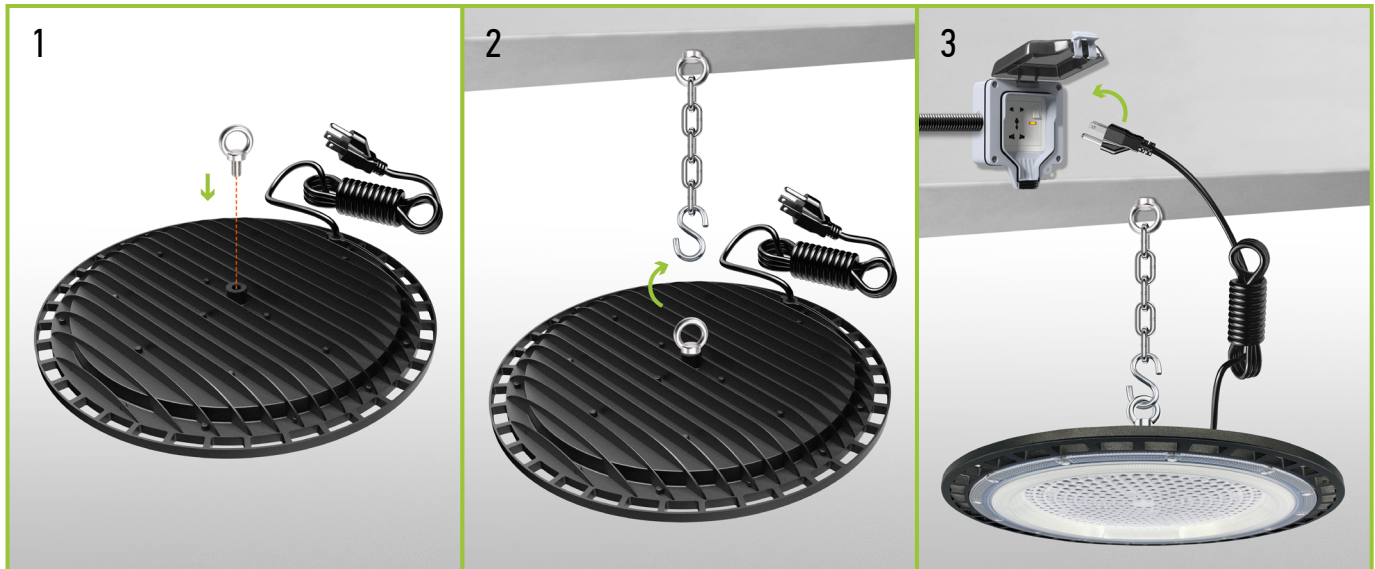

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)

