



BULB OUTDOOR BOLLARD and WALL CYLINDER RETRO

BGLR series


DESIGN: BULB ROUND OUTDOOR BOLLARD RETRO and BULB OUTDOOR WALL CYLINDER RETRO feature a retro design and provide effective illumination. Both fixtures use an E26 base, are constructed from die-cast aluminum, and include a tempered glass cover. The bollard model offers even ambient lighting, while the wall-mounted cylinder delivers up, down or dual-direction illumination.

VARIETY: The fixtures and bollards feature a round shape and are available in multiple sizes. The wall-mounted fixtures come in 8-inch and 12-inch options and support up, down or dual-direction installation, while the bollards are available in 12-inch and 24-inch sizes. The fixtures feature Decorative Grid glass and a black finish. The Decorative Grid design creates a pleasant and calming atmosphere, embodying minimalist elegance with its streamlined, vintage style


BULB: The fixture includes a standard E26 medium base. We recommend to use LED A19 bulb.

APPLICATION: The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

ADVANTAGES: ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!



BGLR BOLLARD RETRO

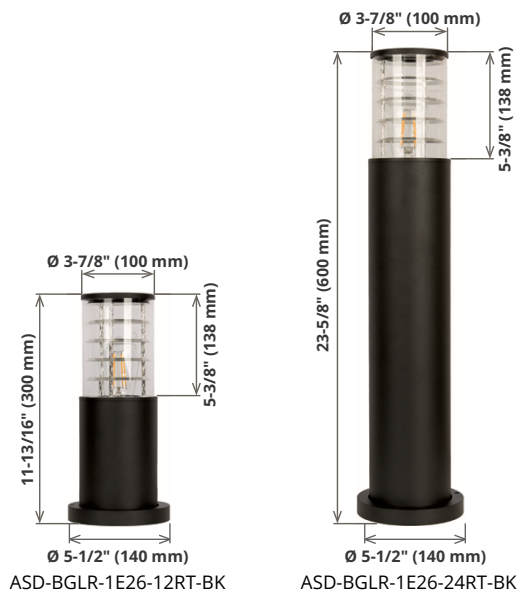

WGLR WALL CYLINDER RETRO



PRODUCT PRESENTATION

MODEL	SIZE	NUMBER OF LIGHTS	VOLTAGE	BULB TYPE	FINISH	DIMENSIONS	CERTIFICATION
BGLR BOLLARD RETRO							
ASD-BGLR-1E26-12RT-BK	12 inch	1 light	120V	E26 60 W max	Black	5-1/2" x 5-1/2" x 11-13/16"	ETL(5032534)
ASD-BGLR-1E26-24RT-BK	24 inch	1 light	120V	E26 60 W max	Black	5-1/2" x 5-1/2" x 23-5/8"	ETL(5032534)
WGLR WALL CYLINDER RETRO							
ASD-WGLR-1E26RT-BK	8 inch	1 light	120V	E26 60 W max	Black	4-3/8" x 6-7/16" x 8-1/4"	ETL(5032534)
ASD-WGLR-2E26RT-BK	13 inch	2 light	120V	E26 60 W max	Black	4-3/8" x 6-7/16" x 13"	ETL(5032534)

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP | www.asd-lighting.com | orders@asd-lighting.com



TECHNICAL PARAMETERS

MODEL	WORK ENVIRONMENT	OPERATING TEMPERATURE	HOUSING	LENS
BGLR BOLLARD RETRO				
ASD-BGLR-1E26-12RT-BK	Wet location	-40°F to 113°F(-40°C to 45°C)	Aluminium	Clear Glass
ASD-BGLR-1E26-24RT-BK	Wet location	-40°F to 113°F(-40°C to 45°C)	Aluminium	Clear Glass
WGLR WALL CYLINDER RETRO				
ASD-WGLR-1E26RT-BK	Wet location	-40°F to 113°F(-40°C to 45°C)	Aluminium	Clear Glass
ASD-WGLR-2E26RT-BK	Wet location	-40°F to 113°F(-40°C to 45°C)	Aluminium	Clear Glass

ORDERING INFORMATION

MODEL	PRODUCT DIMENSIONS	WEIGHT	PCS. PER CARTON	CARTON SIZE	CARTON WEIGHT	UPC	GTIN 12
BGLR BOLLARD RETRO							
ASD-BGLR-1E26-12RT-BK	5-1/2" x 5-1/2" x 11-13/16"	2.0 lbs(0.9kg)	1	16.54" x 8.27" x 8.46"	2.8 lbs	81019020327	810190203279
ASD-BGLR-1E26-24RT-BK	5-1/2" x 5-1/2" x 23-5/8"	3.6 lbs(1.6kg)	1	28.35" x 8.27" x 8.46"	4.9 lbs	81019020328	810190203286
WGLR WALL CYLINDER RETRO							
ASD-WGLR-1E26RT-BK	4-3/8" x 6-7/16" x 8-1/4"	1.7 lbs(0.7kg)	2	13.98" x 8.66" x 11.81"	5.0 lbs	81019020338	10810190203382
ASD-WGLR-2E26RT-BK	4-3/8" x 6-7/16" x 13"	2.2 lbs(1.0kg)	2	12.20" x 11.81" x 14.76"	6.4 lbs	81019020339	10810190203399

INSTALLATION GUIDE

Please read all the instructions below before installation!

IMPORTANT SAFETY INFORMATION

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.

If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury: read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

PACKAGE CONTENTS FOR A BOLLARD

DESCRIPTION	QUANTITY
Bulb Outdoor Bollard Retro	1
Wire nut (A)	3
Waterproof gasket (B)	3
Anchor screw (C)	3
Box	1

A

B

C

PACKAGE CONTENTS FOR A WALL CYLINDER

DESCRIPTION	QUANTITY
Bulb Outdoor Wall Cylinder Retro	1
Mounting bracket (A)	1
Mounting screw (B)	2
Decorative nut (C)	2
Waterproof gasket (D)	2
Wire connector (E)	3
Box	1

A


B

C

D

E

INSTALLATION STEPS FOR A BOLLARD

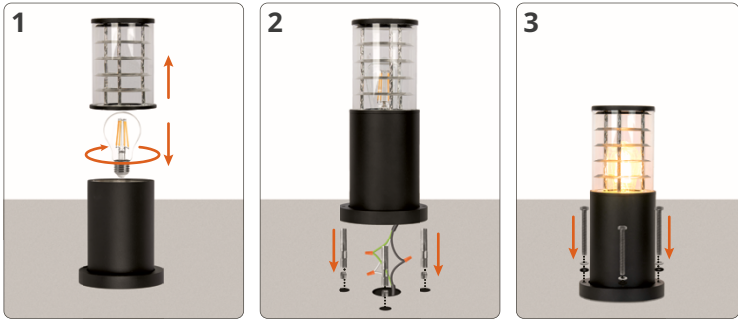

- Remove the lid, install the bulb (A19, max 60W) and close the lid. Bulb are not included.
- Drill 3 appropriately sized holes for the anchors in the mounting surface. Connect the wires: Black to Black, White to White, Green to Green. Secure the connections with wire nuts.
- Place a waterproof gasket on each mounting screw. Attach the fixture body using the anchor screws.

INSTALLATION STEPS FOR A WALL CYLINDER



- Remove the glass lid, install the bulb (A19, max 60W) and close the lid. Screw the two mounting screws onto the mounting plate. Attach the mounting plate to the outlet box using the screws. Make sure the threads of the mounting screws are facing out when the mounting plate is attached to the outlet box.
- Connect the wires: Black to Black, White to White, Green to Green. Secure the connection with wire nuts. Place the fixture base on the wall by aligning the protruding mounting screws through the holes on the wall plate.
- Put a waterproof gasket on each mounting screw. Tighten the fixture to the wall using two decorative nuts.