
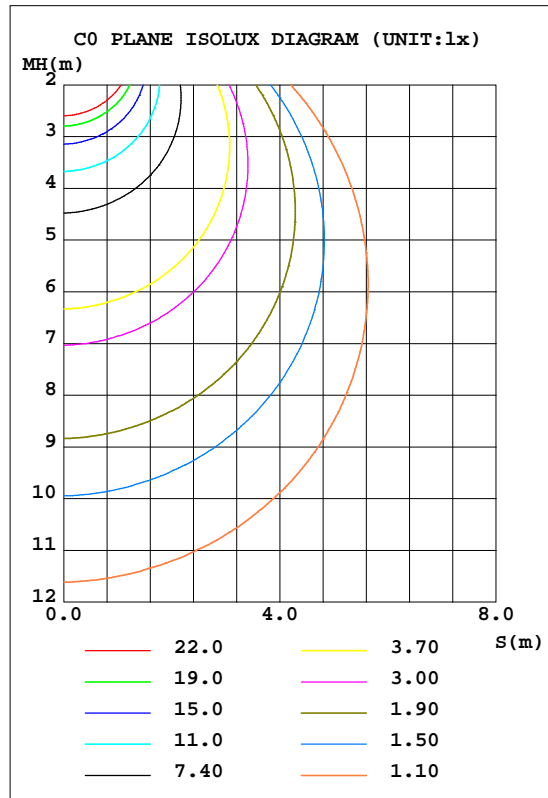


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 68.19 lm/W			
MODEL	ASD-JBS-3D6AC(5000K)	I _{max} (cd)	148.5	S/MH(C0/180)	1.27
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	430.27	h UP, DN(C0-180)	0.8,47.9
NOMINAL FLUX(lm)	430.272	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.8,50.6
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	98.4	CIBSE SHR MAX	1.35

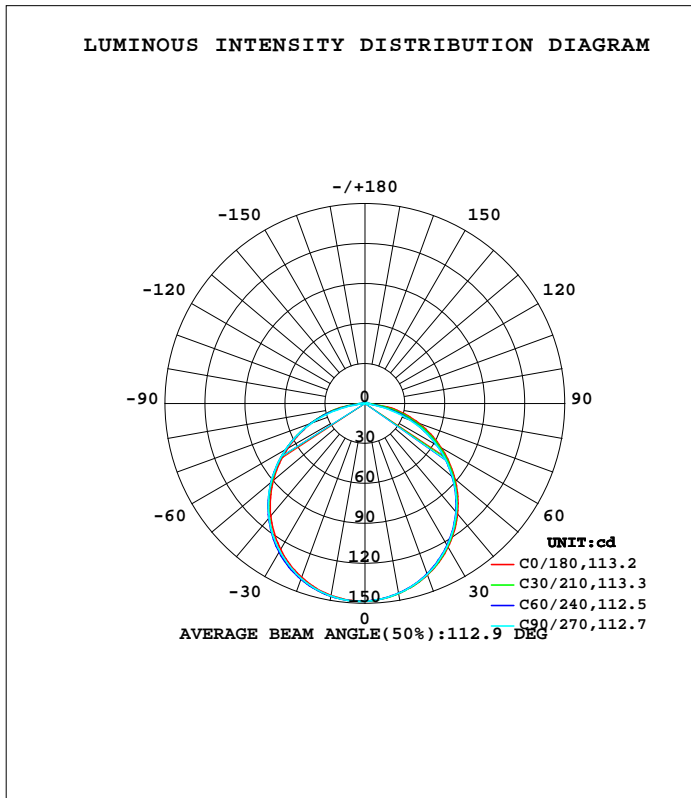

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	144.8	144.6	144.6	145.3	146.3	146.8	146.7	145.9	0- 10	14.03	14.03	3.26,3.26
20	137.0	136.3	136.4	137.3	138.9	140.3	139.7	138.8	10- 20	40.22	54.25	12.6,12.6
30	124.6	123.5	123.4	124.7	126.6	128.5	128.0	127.2	20- 30	61.10	115.3	26.8,26.8
40	108.0	106.6	106.5	107.9	110.1	112.1	112.1	111.1	30- 40	73.88	189.2	44,44
50	88.16	86.24	85.86	87.73	89.80	91.77	92.06	91.36	40- 50	76.85	266.1	61.8,61.8
60	65.88	63.17	62.06	64.56	66.66	68.41	68.51	69.08	50- 60	69.64	335.7	78,78
70	42.66	38.35	35.37	38.51	42.61	42.97	42.17	44.31	60- 70	53.12	388.9	90.4,90.4
80	20.29	12.34	6.433	10.68	19.35	16.50	12.30	16.82	70- 80	29.13	418.0	97.1,97.1
90	0.9785	1.091	0.9775	1.090	2.095	1.222	1.297	1.464	80- 90	5.507	423.5	98.4,98.4
100	1.016	1.136	0.9923	1.130	1.040	1.100	1.015	1.057	90-100	1.320	424.8	98.7,98.7
110	0.9781	1.068	1.016	1.041	1.028	1.056	0.9923	1.034	100-110	1.114	425.9	99,99
120	0.9780	1.029	1.029	1.025	1.045	1.048	0.9923	1.031	110-120	1.020	426.9	99.2,99.2
130	0.9807	1.032	1.049	1.034	1.061	1.053	0.9923	1.036	120-130	0.9235	427.9	99.4,99.4
140	0.9847	1.038	1.051	1.042	1.074	1.084	0.9923	1.047	130-140	0.8032	428.7	99.6,99.6
150	0.9916	1.050	1.081	1.093	1.115	1.102	1.040	1.079	140-150	0.6629	429.3	99.8,99.8
160	1.052	1.107	1.119	1.142	1.163	1.132	1.097	1.137	150-160	0.5068	429.8	99.9,99.9
170	1.120	1.153	1.156	1.175	1.218	1.182	1.156	1.182	160-170	0.3244	430.2	100,100
180	1.224	1.233	1.201	1.205	1.239	1.218	1.224	1.216	170-180	0.1133	430.3	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

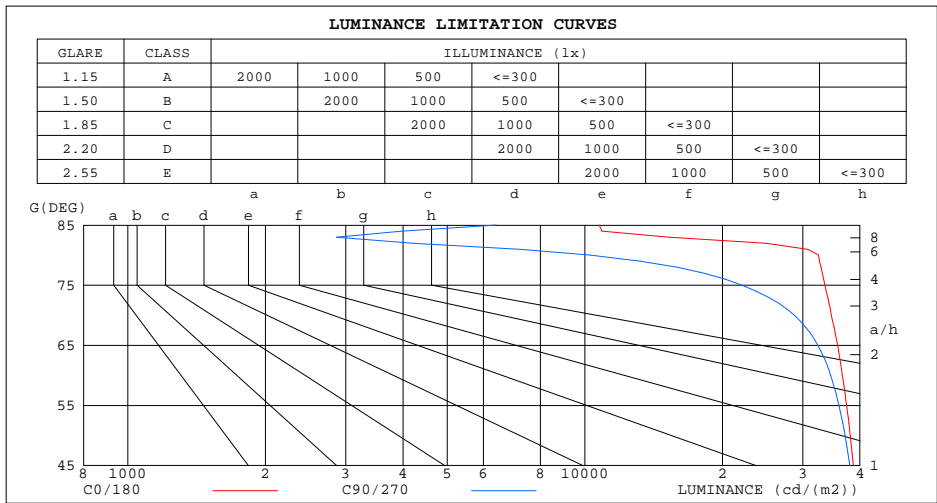

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	10759	6399
80	32462	10299
75	33547	22093
70	34650	28746
65	35743	32355
60	36601	34506
55	37424	36000
50	38100	37131
45	38709	38013


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

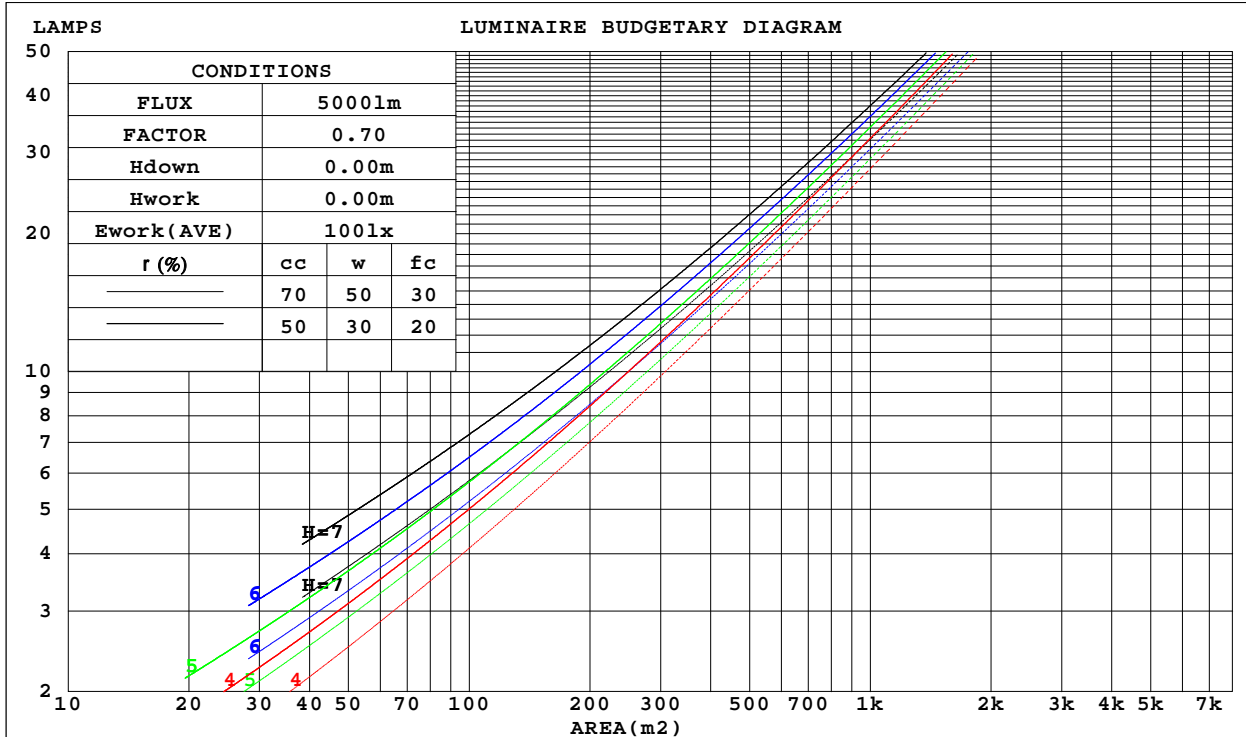

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

WEC AND CCEC

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.296	.169	.054	.282	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.288	.158	.048	.281	.155	.048	.269	.150	.046	.257	.144	.045	.247	.140	.044	
3.0	.268	.142	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.112	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.175	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.127	.112	.099	.087	.065	.058	.051	.021	.019	.016	
2.0	.184	.144	.111	.158	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.176	.127	.087	.151	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.062	.100	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.161	.103	.060	.139	.089	.052	.095	.062	.037	.055	.037	.022	.018	.012	.007	
6.0	.154	.095	.052	.133	.082	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.122	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.116	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.112	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.06*0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	26.2	25.0	26.6	26.9	24.4	26.0	24.8	26.4	26.7
3H	26.5	28.0	26.9	28.3	28.7	26.0	27.5	26.4	27.8	28.2
4H	27.3	28.6	27.7	29.0	29.4	26.5	27.8	26.9	28.2	28.6
6H	27.9	29.1	28.3	29.5	29.9	26.6	27.9	27.0	28.3	28.7
8H	28.0	29.2	28.5	29.6	30.1	26.6	27.8	27.0	28.2	28.6
12H	28.0	29.2	28.5	29.6	30.0	26.6	27.7	27.0	28.1	28.6
4H 2H	25.2	26.6	25.6	26.9	27.3	25.1	26.5	25.5	26.8	27.3
3H	27.3	28.4	27.7	28.9	29.3	26.9	28.0	27.3	28.4	28.9
4H	28.2	29.2	28.6	29.6	30.1	27.4	28.4	27.8	28.9	29.3
6H	28.9	29.8	29.4	30.3	30.8	27.6	28.5	28.1	28.9	29.4
8H	29.1	29.9	29.6	30.4	30.9	27.5	28.4	28.0	28.9	29.4
12H	29.1	29.9	29.6	30.4	30.9	27.5	28.3	28.0	28.8	29.3
8H 4H	28.4	29.2	28.9	29.7	30.2	27.7	28.5	28.1	29.0	29.5
6H	29.2	29.9	29.7	30.4	30.9	27.9	28.6	28.4	29.1	29.6
8H	29.4	30.1	30.0	30.6	31.1	27.8	28.5	28.4	29.0	29.5
12H	29.5	30.1	30.0	30.6	31.2	27.8	28.4	28.4	28.9	29.5
12H 4H	28.4	29.1	28.9	29.6	30.2	27.7	28.4	28.2	28.9	29.4
6H	29.2	29.8	29.8	30.3	30.9	27.9	28.5	28.4	29.0	29.6
8H	29.5	30.0	30.0	30.5	31.1	27.9	28.4	28.4	28.9	29.5
CIE190: 2010										

CIE190: 2010
Area: 0.0036 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1977]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	87	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1977]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

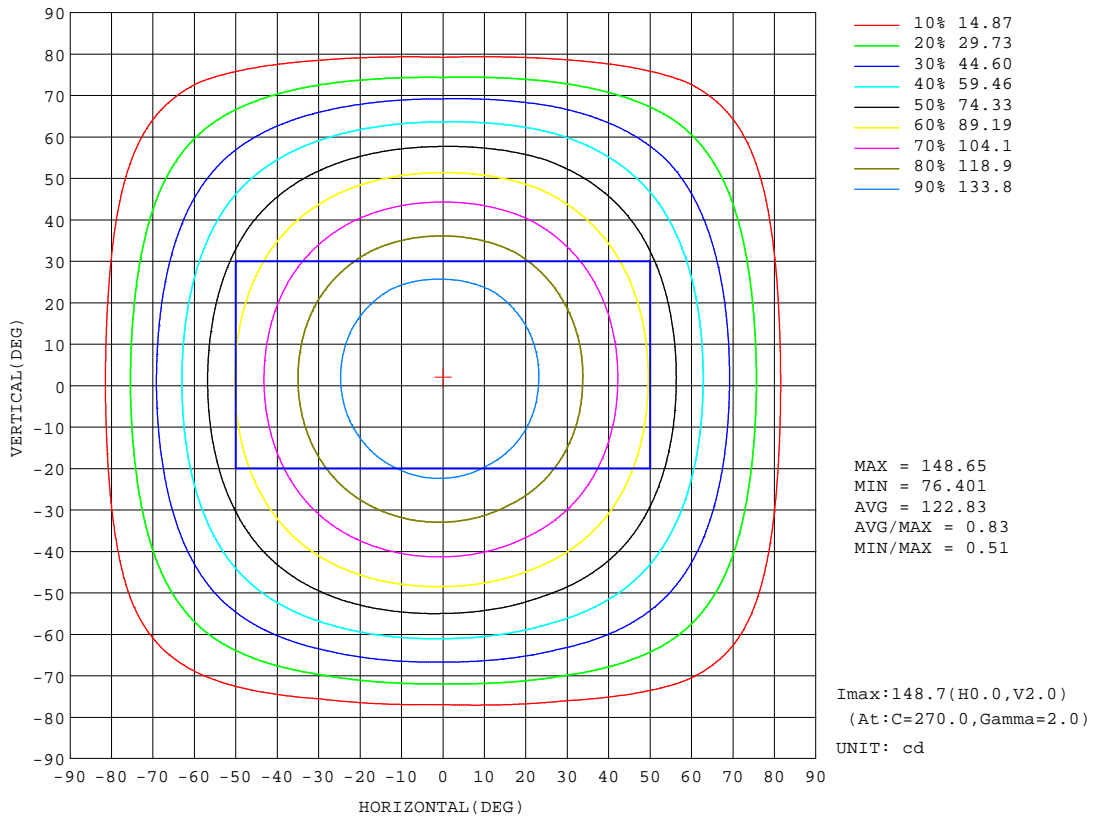


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

AAI Figure

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Flux out:316.2 lm

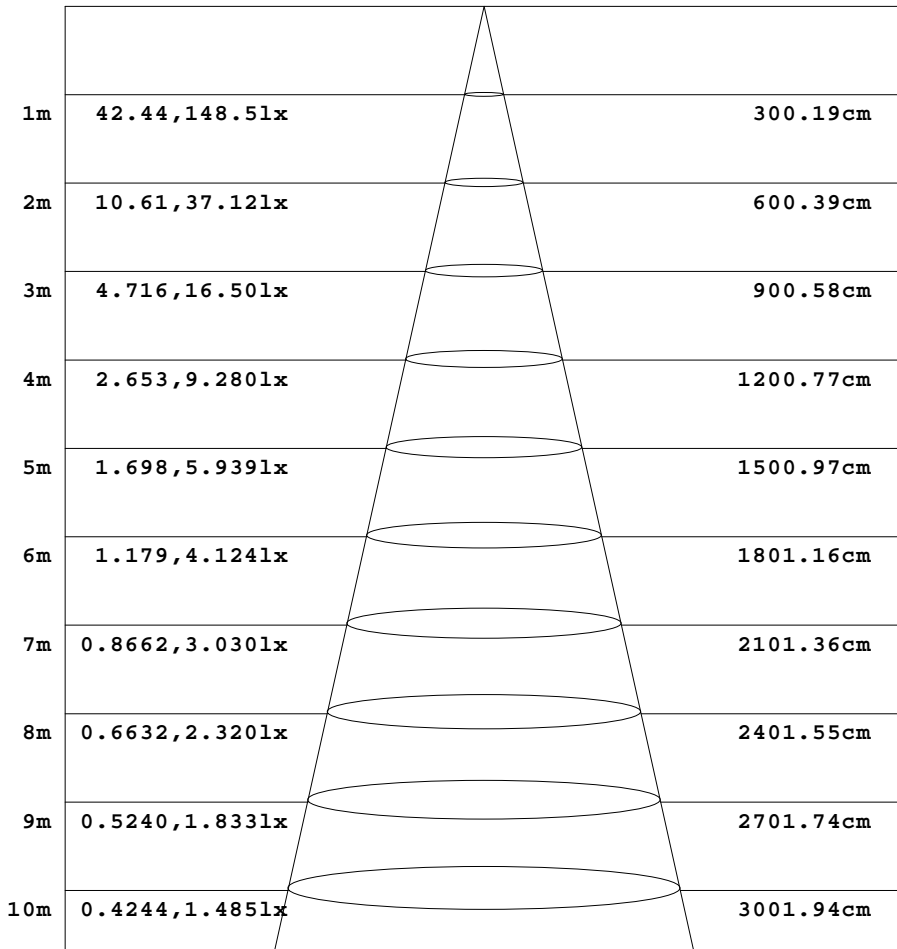

Height Eavg, Emax Angle:112.65deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

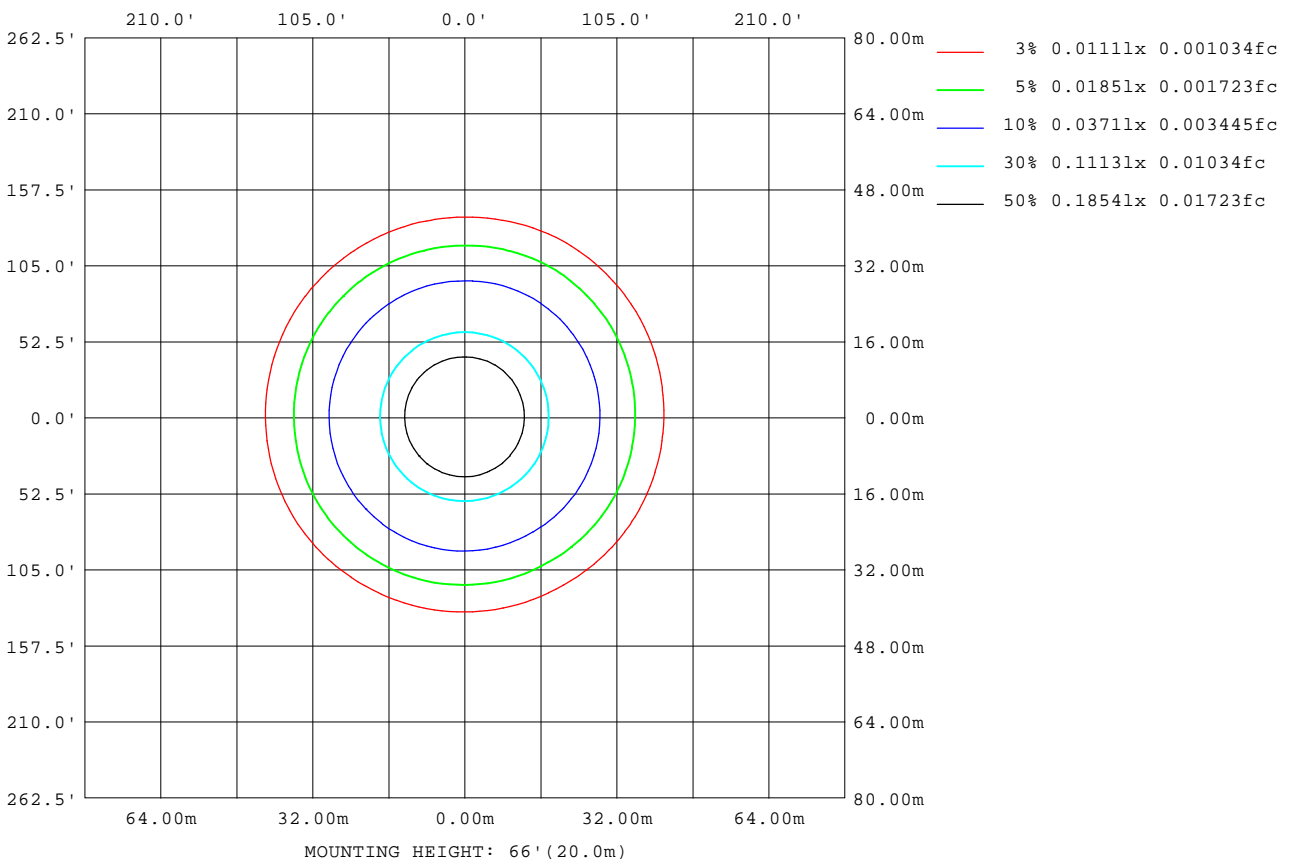

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1977]
 Remarks:

LED Avg.L Report

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	35840
L_0~180(75)av	33293
L_0~180(85)av	14028
L_90~270(65)av	34496
L_90~270(75)av	25819
L_90~270(85)av	7089
L_45(65)av	35482
L_45(75)av	29784
L_45(85)av	9763

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1977]
Remarks:

Planar Illuminance Curve

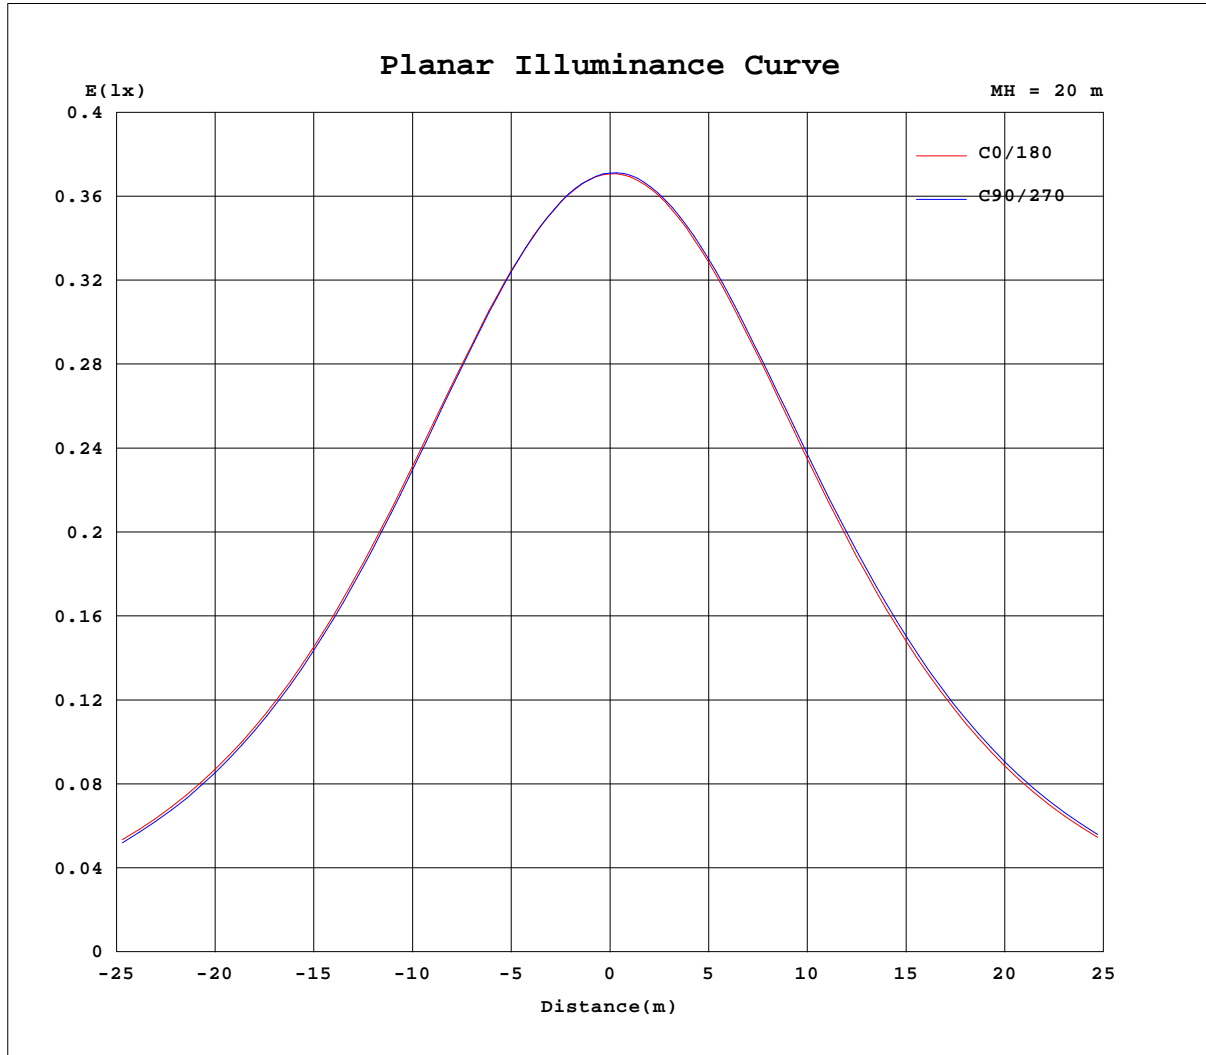

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1977]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.97V I:0.0556A P:6.3100W PF:0.9386 Freq:60.00Hz Lamp Flux:430.272x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	148	148	148	148	148	148	148	148	148	148	148	148						
5	147	147	147	147	147	148	148	148	148	148	148	148						
10	145	145	144	145	145	146	146	147	147	147	146	146						
15	141	141	141	141	141	142	143	144	144	144	143	143						
20	137	137	136	136	137	138	139	140	140	140	139	138						
25	131	131	130	130	131	132	133	135	135	134	134	133						
30	125	124	123	123	124	125	127	128	129	128	128	126						
35	117	116	115	116	116	117	119	121	121	121	121	119						
40	108	107	106	107	107	109	110	112	112	112	112	110						
45	98.5	97.5	96.3	96.7	97.5	98.8	100	102	103	102	103	101						
50	88.2	87.0	85.5	85.9	87.1	88.4	89.8	91.4	92.1	92.1	92.4	90.3						
55	77.3	76.0	73.9	74.3	75.8	77.1	78.4	80.2	80.7	80.7	81.5	79.5						
60	65.9	64.4	61.9	62.1	63.5	65.6	66.7	68.4	68.5	68.5	69.9	68.3						
65	54.4	52.4	49.4	49.2	50.5	53.3	54.7	56.0	55.8	55.8	57.4	56.6						
70	42.7	40.1	36.6	35.4	36.7	40.3	42.6	43.2	42.7	42.2	44.2	44.5						
75	31.3	27.9	23.2	20.6	22.1	27.0	30.8	30.5	29.4	27.5	30.0	31.6						
80	20.3	15.7	9.03	6.43	7.77	13.6	19.3	18.2	14.8	12.3	15.1	18.5						
85	3.38	3.95	1.31	2.01	1.79	2.36	5.43	6.06	1.95	2.44	1.87	5.44						
90	0.98	1.06	1.12	0.98	1.01	1.17	2.09	1.26	1.18	1.30	1.16	1.76						
95	1.06	1.16	1.90	1.36	1.81	1.22	1.08	1.23	1.15	1.16	1.19	1.12						
100	1.02	1.11	1.17	0.99	1.08	1.18	1.04	1.12	1.08	1.01	1.06	1.05						
105	0.99	1.08	1.15	1.01	1.05	1.08	1.03	1.08	1.06	0.99	1.05	1.03						
110	0.98	1.05	1.08	1.02	1.04	1.04	1.03	1.06	1.05	0.99	1.04	1.03						
115	0.98	1.03	1.05	1.02	1.04	1.03	1.04	1.05	1.04	0.99	1.03	1.02						
120	0.98	1.02	1.04	1.03	1.02	1.03	1.04	1.05	1.05	0.99	1.04	1.03						
125	0.98	1.02	1.04	1.04	1.03	1.03	1.06	1.05	1.05	0.99	1.04	1.03						
130	0.98	1.03	1.04	1.05	1.03	1.04	1.06	1.05	1.06	0.99	1.04	1.03						
135	0.98	1.03	1.04	1.05	1.03	1.04	1.07	1.05	1.08	0.99	1.05	1.03						
140	0.98	1.04	1.04	1.05	1.03	1.05	1.07	1.05	1.12	0.99	1.06	1.03						
145	0.99	1.05	1.04	1.06	1.05	1.07	1.10	1.05	1.15	1.02	1.07	1.04						
150	0.99	1.06	1.04	1.08	1.10	1.08	1.12	1.05	1.16	1.04	1.11	1.05						
155	1.02	1.08	1.07	1.10	1.13	1.11	1.14	1.05	1.16	1.07	1.13	1.07						
160	1.05	1.11	1.10	1.12	1.15	1.13	1.16	1.09	1.17	1.10	1.19	1.09						
165	1.10	1.15	1.11	1.14	1.15	1.16	1.19	1.13	1.18	1.12	1.21	1.13						
170	1.12	1.19	1.12	1.16	1.15	1.20	1.22	1.17	1.19	1.16	1.22	1.15						
175	1.16	1.21	1.17	1.19	1.15	1.22	1.23	1.21	1.20	1.20	1.22	1.19						
180	1.22	1.25	1.22	1.20	1.18	1.23	1.24	1.23	1.20	1.22	1.22	1.21						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1977]
 Remarks: