



LED WRAP FIXTURE

► **DESIGN** - LED WRAP ROUND FIXTURE features a durable, commercial-grade housing that is resistant to rust and impact, along with an anti-glare PMMA lens to ensure many years of reliable use. It is designed to operate on 120-277V circuits.

► **DIMMING** - Smooth 0-10V dimming capabilities ranging from 10% to 100% with modern LED dimmers allow you to control the look and feel of your space.

► **COLOR AND POWER SELECTABLE** - You can choose either a 3500K neutral white, 4000K cool white or 5000K daylight color temperature, and change the power with a simple switch.

► **APPLICATION** - Perfect commercial or industrial solution for office buildings, schools, hospitals, hallways, stairwells, workshops, and many other applications. It is also Damp Locations rated.

► **ADVANTAGES** - With calculated lifespan up to 190 000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with UL and DLC Standard certifications to guarantee top quality products and safety!



PRODUCT PRESENTATION:

Model	Size	Power	Voltage	Dimming	Lumens	CCT	Finish	Dimensions	Certification
ASD-WRL2-4A45AC	4 ft	34/38/45 W	120-277V	0-10V	6,312lm	3,500/4,000/5,000 K	White	46" x 9-3/4" x 3-7/16"	UL(E473804), DLC Standard

For detailed luminous flux information please refer to Annex 1, page 2.

TECHNICAL PARAMETERS:

Model	Max input current	Inrush current	Work environment	Operating temperature	Power factor	Beam Angle	Surge protection	Housing	Lens	CRI
ASD-WRL2-4A45AC	0.44A	60A	Damp location	-4°F to 122°F(-20°C to 50°C)	>0.9	110°	2kV	Steel	PMMA	>80

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. Per carton	Carton size	Carton weight	UPC	GTIN 14
ASD-WRL2-4A45AC	46" x 9-3/4" x 3-7/16"	7.0 lbs(3.2kg)	1	48.07" x 10.91" x 4.02"	11.0 lbs	81012811547	-

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED WRAP FIXTURE

DIMMING COMPATIBLE CONTROLS:

Brand	Lutron			Leviton		Legrand
Models	NTSTV-DV	NFTV	DVSTV	IP710	DS710	RH4FBL3PW

PACKAGE CONTENTS:

Description	Quantity
LED Wrap Fixture	1
Suction cup (A)	1
Box	1



INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.


ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

ANNEX 1

Model	Watts	3,500 K	4,000 K	5,000 K
ASD-WRL2-4A45AC	34W	4,795 lm	4,965 lm	4,840 lm
	38W	5,390 lm	5,605 lm	5,444 lm
	45W	6,257 lm	6,524 lm	6,312 lm

INSTALLATION STEPS:

1. Secure the baffle onto the back of the fixture with screws.
2. Open the fixture by pressing the area between the narrow rectangular hole and snap-lock. Connect the wires: Black to Black, White to White, Green to Green
3. Secure the luminaire to the ceiling with the plastic anchors and screws (not included). Assemble lighting fixture.

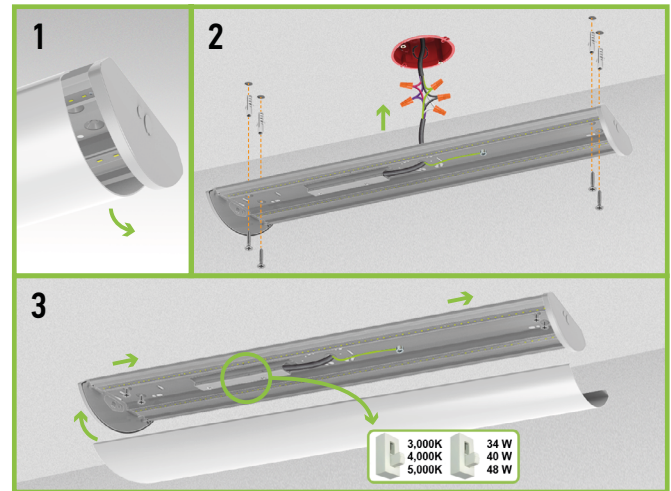

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

